

Flat-Top Supercontinuum and Tunable Femtosecond Fiber Laser Sources at 1.9 - 2.5 μm

D. Klimentov, N. Tolstik, V. V. Dvoyrin, R. Richter and I. T. Sorokina

Abstract — We report the high-energy flat-top supercontinuum covering the mid-infrared wavelength range of 1.9-2.5 μm as well as electronically tunable femtosecond pulses between 1.98-2.22 μm directly from the thulium-doped fiber laser amplifier. Comparison of experimental results with numerical simulations confirms that both sources employ the same nonlinear optical mechanism - Raman soliton frequency shift occurring inside the Tm-fiber amplifier.

To illustrate that, we investigate two versions of the compact diode-pumped SESAM mode-locked femtosecond thulium-doped all-silica-fiber-based laser system providing either broadband supercontinuum or tunable Raman soliton output, depending on the parameters of the system. The first system operates in the Raman soliton regime providing femtosecond pulses tunable between 1.98-2.22 μm . Wide and continuous spectral tunability over 240 nm was realized by changing only the amplifier pump diode current. The second system generates high-energy supercontinuum with the superior spectral flatness of better than 1 dB covering the wavelength range of 1.9-2.5 μm , with the total output energy as high as 0.284 μJ , the average power of 2.1 W at 7.5 MHz repetition rate. We simulate the amplifier operation in the Raman soliton self-frequency shift regime and discuss the role of induced Raman scattering in supercontinuum formation inside the fiber amplifier. We compare this system with a more traditional 1.85–2.53 μm supercontinuum source in the external highly-nonlinear commercial chalcogenide fiber using the Raman soliton MOPA as an excitation source.

The reported systems¹ can be readily applied to a number of industrial applications in the mid-IR, including sensing, stand-off detection, medical surgery and fine material processing.

Index Terms— Fiber lasers, Infrared lasers, Optical fibers.

I. INTRODUCTION

HIGH-energy spectrally tunable and/or broadband sources of femtosecond pulses in the spectral domain beyond 2 μm [1–5] are very interesting for many practical applications, including eye-safe LIDAR [6], optical coherence tomography [7], two-photon microscopy, trace gas sensing [8], THz generation, micromachining, high resolution spectroscopy, remote sensing [3, 4], and environmental monitoring. At the same time, development of such sources is a challenging task,

This paragraph of the first footnote will contain the date on which you submitted your paper for review. We would like to acknowledge the NFR projects FRITEK/191614, ENERGIX 255003/E20, Nano 2021 Project N219686, and EU FET grant GRAPHENICS (618086).

D. Klimentov (dmitry.klimentov@ntnu.no), R. Richter (Roland.Richter2@gmx.de), N. Tolstik (nikolai.tolstik@ntnu.no) and I. T. Sorokina (sorokina@ntnu.no) are with the Department of Physics, Norwegian University of Science and Technology (NTNU), N-7491 Trondheim, Norway;

calling for new technical solutions and laser schemes addressing the specific application related needs.

For example, such applications as sensing and spectroscopy, require highly stable flat-top supercontinuum (SC) sources above 2 μm . Current publications describe mostly systems, where the SC generation occurs either in external optical components, such as specialty fibers [9, 11-14] and waveguides [10], or directly from all-fiber master-oscillator – power amplifier (MOPA) system [4]. The supercontinuum generation in external fibers has received much attention of researchers since the first works by R. Alfano et al [11]. Supercontinua in chalcogenide and fluoride $\text{ZrF}_4\text{-BaF}_2\text{-LaF}_3\text{-AlF}_3\text{-NaF}$ (ZBLAN) fibers are reaching out to 2.7 μm [12], 3.6 μm [13] and even 4 μm [14] by excitation at 2 μm , and up to 13 μm in chalcogenide fibers [15] with the pump centered at 4.5 μm . However, in order to achieve such broad supercontinua one usually applies high energy rather long picosecond or even nanosecond pulses that result in spectrally broad, but incoherent spectra due to the stochastic nature of modulational instability processes [16]. On the other hand, ultra-short pulses (i.e. those produced via a passive mode-locking mechanism) propagating in anomalous dispersion fibers such effects as Raman soliton-frequency shift becomes dominant even in short fibers. Therefore, there exists an important distinction between the mechanisms of supercontinuum generation for ultra-short pulses and for longer, tens of picoseconds to nanosecond pulses.

Another distinction can be made between supercontinua generated in external nonlinear specialty fibers and waveguides and those generated inside the active fiber of the amplifier [4]. Specialty fibers and waveguides are often fragile, their implementation as external components require additional coupling procedure, which increases the sensitivity of the laser system to vibrations, adjustments, often leads to additional losses, and finally substantially decreases the system performance. Our approach of SC generating directly inside the fiber amplifier is significantly simpler and allows reaching high output powers in excess of several Watts [4]. The SC generation directly from the Tm-doped fiber amplifier with average power of 25 W was demonstrated in [17], and this is not the limit. Even more important for a number of applications is the spectral flatness of the radiation. Due to complex dynamics of SC generation, especially in cases, when >100 ps pulses are used

N. Tolstik is also with the Photonics Institute, Vienna University of Technology, A-1040 Vienna; Austria. V.V. Dvoyrin (v.dvoyrin@aston.ac.uk) is with the Aston Institute of Photonic Technologies, Aston University, Birmingham B4 7ET, UK.

¹Patent pending, ATLA Lasers AS, Trondheim, Norway.

Copyright (c) 2015 IEEE. Personal use of this material is permitted. However, permission to use this material for any other purposes must be obtained from the IEEE by sending a request to pubs-permissions@ieee.org.

for its generation SC usually has a complex spectral shape. However, the generation of SC of a very flat shape is possible. For instance, SC with the flatness of 10 dB in the spectral range of 1.97-2.43 μm and the maximum average power of 101.6 W has been demonstrated in [18] from the all-fiber system. Here, thulium-doped fiber (TDF) amplifier, pumped by the set of erbium-doped fiber (EDFA) and erbium/ytterbium-doped fiber (EYDFA) amplifiers driven by the DFB pulsed diode, produced ~ 5 -ns pulses at the repetition rate of 2 MHz. The nature of SC in this case is a random, stochastic process due to modulational instability, and, the spectrum is different from pulse to pulse.

In contrast, the soliton Raman self-frequency shift and supercontinuum generation with ultra-short pulses – approach of this work - are *deterministic* processes, resulting in a train of pulses with well-controlled, identical spectra and temporal forms. This allows the tuning and flat-top supercontinuum generation described in the present paper. Such pulses have orders of magnitude lower noise, good mutual coherence properties (frequency combs), and are therefore much more desirable for sensing and measurement applications. Finally, only such pulses can serve as sources for further nonlinear-optical conversion (such as OPO pumping, etc.).

The aim of the present work was generation of spectrally flat high energy femtosecond SC pulses directly from the Tm-fiber amplifier using passively mode-locked pulsed seed laser. As an illustration of the main mechanisms of the supercontinuum formation in our case we first studied the Raman soliton frequency shift inside the amplifier fiber – an attractive tuning technique that does not require any external gratings, but can be done electronically.

There is a number of techniques for producing high-power ultra-short tunable pulses directly from oscillator [19, 20], and generation of Raman solitons is one of the most attractive techniques. The wide spectral tunability can be obtained by the Raman soliton amplification externally or directly in the amplifier [3, 21]. In particular, tunability over 140 nm range was demonstrated after amplification of Raman soliton in external Tm-doped fiber (TDF) [22], 108 fs pulses with energy of 31 nJ and average power of 3.1 W were obtained. The Er-doped fiber laser (EDFL), used in that work as a seed laser, produced 400-fs pulses, which were transformed into Raman solitons in a passive fiber and subsequently amplified. In another work [23] one-stage master-oscillator – power amplifier (MOPA) system based on EDFL-pumped TDFL seed laser was demonstrated to produce 5-nJ pulses of ~ 100 fs duration generated directly in the amplifier with average power of ~ 350 mW tunable up to 2.2 μm . More recently, the tunability from 2 to 3 μm was demonstrated [24] from the all-fiber system. The generation of 4-nJ, 100-fs optical pulses was obtained in a germanate glass core silica glass cladding fiber with a driving pulse at 2 μm produced by an all-fiber laser system consisting of an Er-fiber source at 1.6 μm , a Raman fiber shifter, and a Tm-fiber amplifier. Another article describes a chirped pulse fiber amplifier at 2.08 μm tunable up to 2.3 μm emitting 383-fs pulses at the repetition rate of 7 MHz with the pulse energy of 10 nJ [25]. Here, the peak power reached 200 kW level. The simple and compact Tm-doped fiber MOPA generating Raman

solitons tunable between 2-2.2 μm with average power up to 3W, pulses as short as 130 fs, and energy up to 38 nJ was demonstrated [21], which is the highest reported pulse energy generation directly from the tunable all-fiber system.

In this paper, we demonstrate two broadband thulium femtosecond fiber MOPAs around 1.9 - 2.5 μm . In the first part of the paper we demonstrate a highly stable all-fiber femtosecond semiconductor saturable absorber mirror (SESAM) mode-locked silica TDF one-stage MOPA operating in the Raman soliton regime with the spectral tunability of 240 nm from 1.98 to 2.22 μm . We realized the wide and continuous spectral tunability electronically, by changing the amplifier pump diode current. We obtained 10-nJ pulses with the duration of few hundred femtoseconds and repetition rate up to 83 MHz. We numerically modelled the performance of the amplifier and compared the experimental results with simulations.

The second part of the paper is an extension of the Raman soliton laser and is devoted to all-fiber femtosecond SESAM mode-locked TDF one-stage MOPA source of SC generation, which does not rely on the external nonlinear fiber of any type. The spectral coverage of such SC is 450 nm with the 15 dB flatness from 1.95 to 2.4 μm and less than 1 dB at the wavelength range of 2.02-2.34 μm at the average output power of 2.1 W, the overall energy of 0.284 μJ and spectral brightness of 4.7 mW/nm. To the best of our knowledge, these parameters are the highest obtained directly from a compact diode pumped femtosecond MOPA fiber laser. In the present study we are focusing on the role of induced Raman scattering in supercontinuum formation inside the fiber amplifier in anomalous dispersion regime, far from the zero-dispersion wavelength. The continuously amplified pulse breakup and Raman self-frequency shift seem to be the predominant effects in the spectral broadening, assisted by the Tm³⁺ ion gain in the longer wavelength region > 2.1 μm .

Finally, we also demonstrate a more conventional nonlinear broadening of MOPA output pulses in an external step-index chalcogenide fiber obtaining SC bandwidth of 680 nm (1.85-2.53 μm) at 168 mW output power.

II. EXPERIMENTAL RESULTS

A. Tunable Raman soliton Tm-doped fiber MOPA

A mode-locked TDF laser has been built using the all-fiber linear cavity configuration. Fig. 1 shows the schematic of the laser with one-stage amplifier. The cavity is formed by a butt-coupled commercially available SESAM, a fused fiber coupler used for launching pump radiation into the cavity, a 0.5 m piece of a commercial silica-based TDF, and a fiber loop mirror with the output coupling about 10%. TDF has 9/125 μm core and clad diameters, respectively, and core numerical aperture of 0.15. The optical parameters of the SESAM are as following: 8% modulation depth, 5 % non-saturable losses, and 10 ps relaxation time. Fiber couplers are based on the conventional silica fibers (SMF-28 and SM-2000).

The seed laser was pumped by two 350 mW single-mode laser diodes (Princeton Lightwave Inc.) operating at the wavelengths of 1567 nm and 1610 nm, respectively. In this

laser configuration the cavity had a total length of 1.15 m, resulting in total cavity dispersion of 0.040 ± 0.001 ps/nm [26].

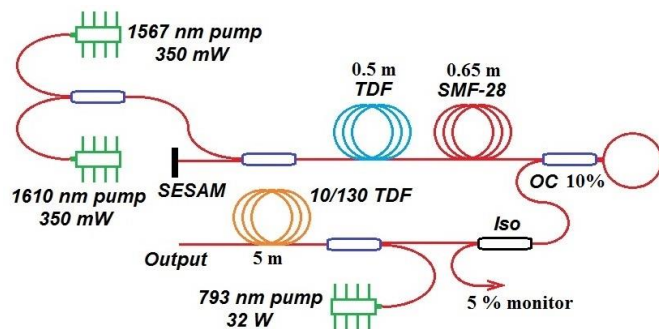


Fig. 1. The schematic of the TDF Raman soliton MOPA system consisting of TDF seed laser and amplifier.

The seed laser output emission formed a stable optical pulse train at the fundamental cavity repetition rate of 83.55 MHz at the wavelength of 1961 nm (Fig. 2a) with the maximum average output power of 5 mW, corresponding to the pulse energy of 60 pJ. No Kelly sidebands were observed. Since the output signal of the seed was below the sensitivity limit of our autocorrelator, we have evaluated the pulse duration from the spectrum as 0.9 ps assuming the transform-limited sech-pulses with the spectral FWHM of 4.6 nm. The pulse train was controlled with 60 MHz-bandwidth photodetector and 1 GHz oscilloscope, total response time of the detection system was about 3 ns. The oscillator was operated in the single-pulse regime. At higher pump powers we have also observed harmonic mode-locking regime with double, triple and higher repetition rates. However, this operation mode was unstable and was not used in further experiments.





The one-stage clad-pumped amplifier was based on a 5 m piece of a silica double-clad TDF. The fiber had 10 and 130 μm core and first clad diameters, respectively, and a 0.15 core numerical aperture. The amplifier was clad-pumped at the wavelength of 793 nm by a 32 W CW multi-mode diode laser. The diode laser had an output fiber with a core diameter of 105 μm . The fiber pump/signal combiner was used for coupling of the laser signal and 793 nm pump, and launching of the combined radiation into the active fiber of the amplifier.

The evolution of the MOPA output spectrum at different amplifier pump levels is presented in Fig. 2. We logically divided the evolution into three steps: spectral broadening due to the self-phase modulation (Fig. 2b); formation of the first Raman soliton and its spectral shift (Fig. 2c); birth of the second, the third, and other Raman solitons resulting in the formation of the optical supercontinuum due to their spectral overlap (Fig. 2d).

Figure 2b presents the behavior of the spectrum at the first step. The amplification exceeded the losses in the amplifier at the pump power of 2.2 W. For the pump power range of 2.93-3.35 W resulting in the average output power of 8.9-20.8 mW, the spectrum experienced weak broadening and mainly symmetrical distortion due to self-phase modulation resulting in appearance of side-lobes.

Starting from 3.35 W of the pump power (20.8 mW of output power), the spectrum became asymmetric. The broadening

stopped at the short-wavelength side, while it continued at the long-wavelength side. When the pump power reached 3.6 W resulting in the output power of 49 mW and the pulse energy of 0.6 nJ, the formation of the new spectral component (Raman soliton) began (Fig. 2b). The spectrum became strongly asymmetric.

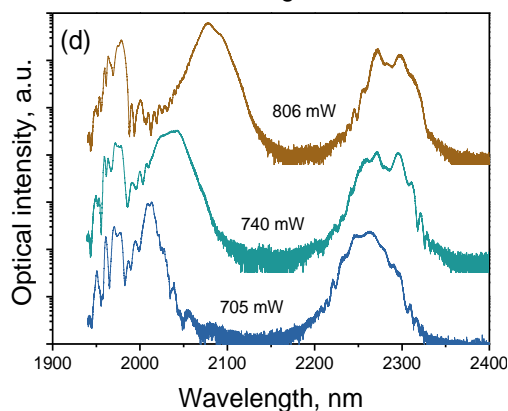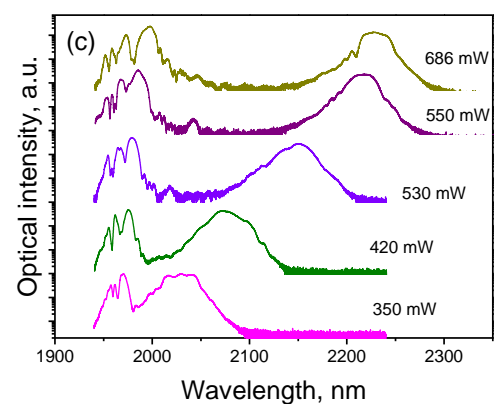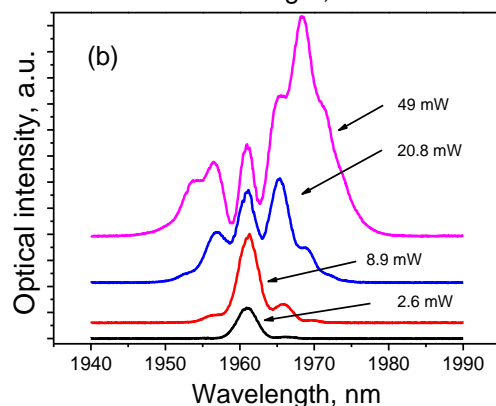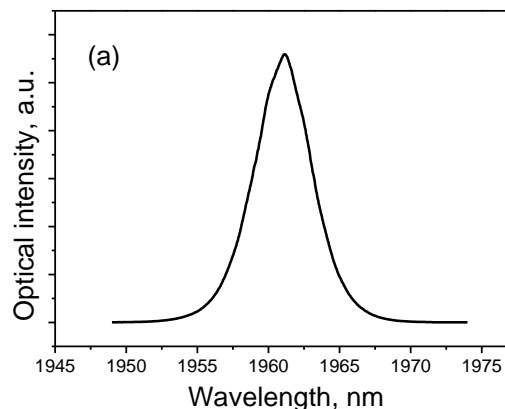

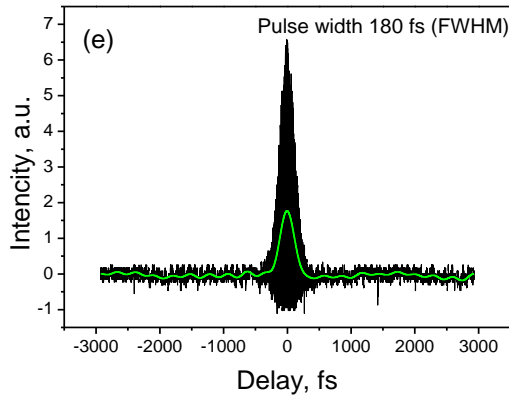


Fig. 2. The seed laser emission spectrum (a); evolution of the spectrum after amplification at low pump powers (b); evolution of the spectrum in the regime of tunable Raman soliton (c), birth and tuning of the second soliton (d); and typical interferometric autocorrelation measured for spectrally filtered soliton at 2.09 μm (e) for the high-repetition-rate Raman soliton MOPA.

At the pump power of 5.28 W (350-mW output power and 4-nJ pulse energy) Raman soliton shift became distinguishable. With the amplifier pump power changing from 5.28 to 7.8 W (output power increase from 350 to 686 mW), the spectral maximum of the Raman soliton moved from 1.98 to 2.22 μm (Fig. 2c). The spectral width of the soliton band was found to be about 60 - 80 nm FWHM.

Integrating the area under the spectral curve, we have found that the amount of energy in the soliton part in relation to the total output pulse energy slightly varied with the spectral shift from 40 to 62%. The spectral tunability of the first Raman soliton reached 240 nm (Fig. 2c).

The Raman soliton has notably shorter pulse duration (180 fs, Gaussian shape assumed) as compared to the 0.9 ps seed pulse (Fig. 2e). Starting from the regime with the output power of 420 mW the pulse duration varied insignificantly.

The further increase of the amplifier's pump power above 7.8 W leads to the further slow red-shift of the first Raman soliton, and also to the birth of new spectral components – the new Raman solitons (Fig. 2d). The strong absorption of silica around 2.4 μm slows down the further red-shift of the first Raman soliton. Further increase of the amplifier pump power leads to the gradual filling of the gaps between Raman solitons with the subsequent supercontinuum formation. The slope efficiency of the MOPA is 13% (Fig. 4).

B. Modeling of tunable Raman soliton MOPA

We have made a numerical simulation of the performance of the amplifier, applying both the static and dynamic models. In frames of the static model we calculated the wavelength- and position-dependent amplifier gain. The results from the static model were then inserted into the dynamic model which simulated the nonlinear propagation of the ultrashort pulse through the amplifying fiber.

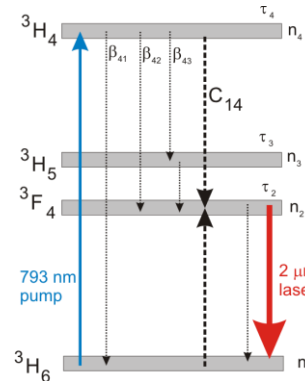


Fig. 3. Energy level scheme of Tm^{3+} levels involved into the modelling.

The static model used the energy level scheme for Tm^{3+} ions as shown in the Fig. 3, as well as the following system of rate equations:

$$\begin{cases} \frac{dn_1(z)}{dt} = \beta_{41} \frac{n_4(z)}{\tau_4} + \frac{n_2(z)}{\tau_2} + \frac{P_s(\lambda, z) \xi_s}{A h \nu_s} [\sigma_{em}(\lambda) n_1(z) - \sigma_{abs}(\lambda) n_2(z)] - \frac{P_p(z) \xi_p}{A h \nu_p} \sigma_p n_1(z) - C_{14} n_1(z) n_4(z); \\ \frac{dn_2(z)}{dt} = C_{14} n_1(z) n_4(z) + \beta_{42} \frac{n_4(z)}{\tau_4} + \frac{n_3(z)}{\tau_3} - \frac{n_2(z)}{\tau_2} - \frac{P_s(\lambda, z) \xi_s}{A h \nu_s} [\sigma_{em}(\lambda) n_1(z) - \sigma_{abs}(\lambda) n_2(z)]; \\ \frac{dn_3(z)}{dt} = \beta_{43} \frac{n_4(z)}{\tau_4} - \frac{n_3(z)}{\tau_3}; \\ \frac{dn_4(z)}{dt} = \frac{P_p(z) \xi_p}{A h \nu_p} \sigma_{pump} n_1(z) - \frac{n_4(z)}{\tau_4} - C_{14} n_1(z) n_4(z); \end{cases}$$

$$n_1(z) + n_2(z) + n_3(z) + n_4(z) = n_{Tm},$$

where n_{Tm} is Tm^{3+} ion dopant concentration; n_1 to n_4 are the populations of energy levels ${}^3\text{H}_6$, ${}^3\text{F}_4$, ${}^3\text{H}_5$, and ${}^3\text{H}_4$, respectively; τ_2 to τ_4 are the lifetimes corresponding energy levels; β_{ij} are branching ratios of the spontaneous transitions from i to j level; C_{14} is the cross-relaxation parameter, P_p is the amplifier pump power at 793 nm; P_s is the signal power at laser transition; A is the area of the Tm -doped fiber core; ξ_p and ξ_s are the overlap factors for the pump and signal mode field with the fiber core; σ_p , σ_{em} , and σ_{abs} are cross-sections for pump absorption, signal emission and signal absorption, respectively.

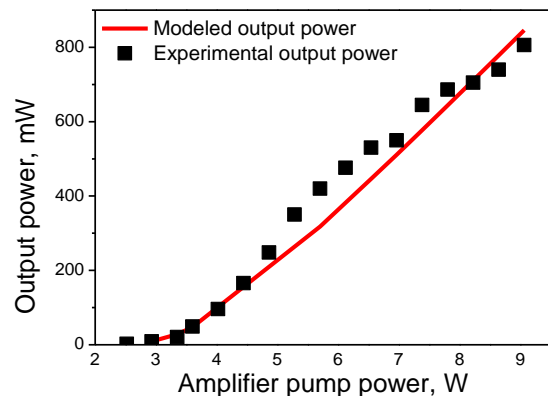


Fig. 4. Input-output characteristics of the Tm amplifier

Using the static approach, we calculated the input-output characteristics of the amplifier, which corresponded to our experimental results (Fig. 4). Then we implemented the split-step-Fourier algorithm to simulate the short pulse propagation in the fiber amplifier. The model used a sech-shaped pulse from the oscillator and included propagation through both passive bridge fibers and the amplifier. The wavelength-dependent gain was calculated using the results from the static analysis. Since the silica fiber becomes lossy above 2 μm , we also included the wavelength-dependent loss coefficient provided by the fiber manufacturer. The group velocity dispersion (GVD) was calculated using the Sellmeier coefficients for fused silica [27]. Self-phase modulation and delayed nonlinear response were calculated in time domain according to:

$$\Delta\varphi(t) = \gamma|A(t)|^2,$$

$$\Delta A(t) = i\gamma\left(1 + \frac{i}{\omega_0}\frac{\partial}{\partial t}\right) * \left(A(t) \int_0^T R(\tau) |A(t-\tau)|^2 d\tau\right),$$

where

$$R(\tau) = (1 - f_R)\delta(\tau) + f_R h(\tau),$$

$\delta(\tau)$ is the Dirac delta function representing the instantaneous response; $h(\tau)$ is the Raman response function implemented according to Hollenbeck approximation [28]; and f_R specifies the relative strength of the delayed nonlinear response.

The Table 1 summarizes the numerical values of the parameters used in the simulation.

TABLE I
NUMERICAL VALUES OF THE PARAMETERS
USED FOR THE SIMULATION

Parameter	Value	Reference
τ_2	430 μs	[29]
τ_3	7 ns	[30]
τ_4	20 μs	[31]
β_{41}	0.88	[32]
β_{42}	0.09	[32]
β_{43}	0.03	[32]
C_{14}	$1.7 \cdot 10^{-22} \text{ m}^3 \text{ s}^{-1}$	[30]
$\sigma_{\text{abs}}(\lambda), \sigma_{\text{em}}(\lambda)$	Spectrum	[33]
n_2	$3.15 \cdot 10^{-20} \text{ m}^2/\text{W}$	[34]
f_R	0.3	[35, 36]
A_{eff}	130 μm^2	[37]

The results of the simulations of the MOPA output spectra are summarized in the Fig. 5. The modelled spectra show rather good agreement with the experimental data. Amplification of the seed pulse resulted in the spectral broadening induced by SPM (Fig. 5a). Starting from a certain pump power level we observe formation of first, and then second Raman soliton (Fig. 5b). The good agreement with the experiment confirms the validity of our amplified soliton self-frequency shift model.

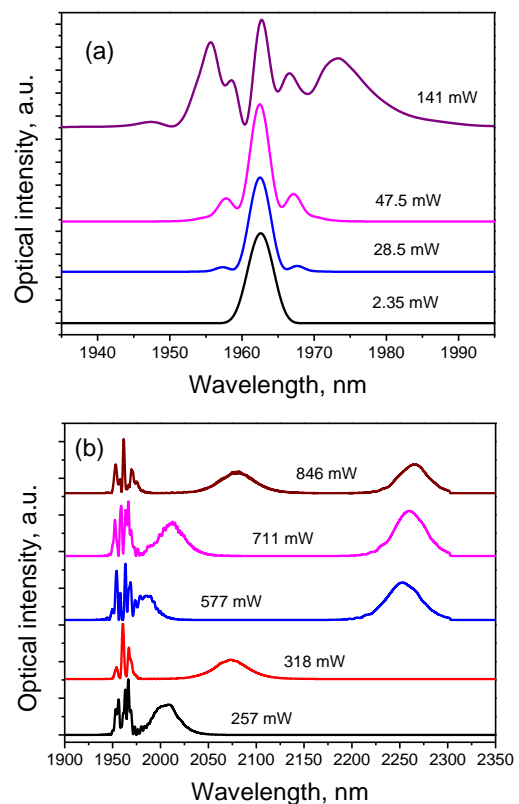


Fig. 5. The simulated evolution of the spectrum after amplification at low pump powers (a); simulated evolution of the spectrum in the regime of tunable Raman solitons (b). The numbers above each spectrum indicate simulated output power .

C. High energy SC generation directly from TDF MOPA

The geometry of the MOPA for direct SC generation (Fig. 6) is similar to the Raman MOPA. It differs by the parameters of the seed laser (cavity length, pulse energy, pump power, emission spectrum), but share the same amplifier.

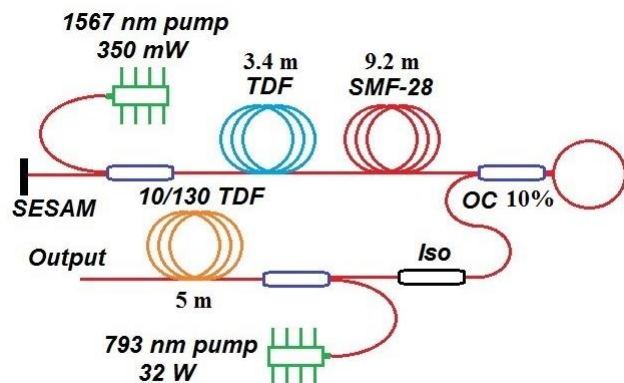


Fig. 6. The schematic of the MOPA system consisting of TDF seed laser and amplifier.

The seed laser was pumped by a 350 mW single-mode laser diode operating at the wavelength of 1567 nm. In order to maximize the pulse energy, we have built the cavity with the full length of 12.6 m (3.4 m of TDF and 9.2 m of SMF-28) - the total cavity dispersion of 0.441 ± 0.008 ps/nm. The laser emission wavelength was measured to be around 1985 nm (Fig. 7a). The spectral bandwidth at FWHM was 4.2 nm. The laser operated in the fundamental soliton regime, and Kelly

sidebands were observed. The first pair of sidebands was located 3.4 nm apart from the central emission wavelength and carried significant amount of pulse energy. The maximum average output power of the laser oscillator was 10 mW for the single pulse regime where the laser was routinely operated. 20 mW output power could be achieved in the harmonic mode-locking regime. The pulse train measured with 60 MHz-bandwidth photodetector and 1 GHz oscilloscope showed the single-pulse operation at 7.5 MHz repetition rate. The transform-limited pulse duration was about 0.9 ps.

10 mW output power at 7.5 MHz and 10% output coupler transmission results in >10 nJ intracavity pulse energy, thus considerably exceeding the ~ 0.5 nJ maximal soliton energy estimated for 0.9 ps pulse duration in SMF-28 fiber (assuming 45 ps/nm*km dispersion and $3 \cdot 10^{-20}$ m²/W nonlinearity). We assume that the laser was operated in the pulse burst mode, where the bursts of solitonic pulses separated from each other by 10 to 100 ps were emitted. Our detection system has a response time of about 3 ns and thus could not resolve single pulses in such a burst. Since the laser cavity does not contain any polarization-defining components, vector solitons [38] could be one of the mechanisms responsible for the pulse burst operation.

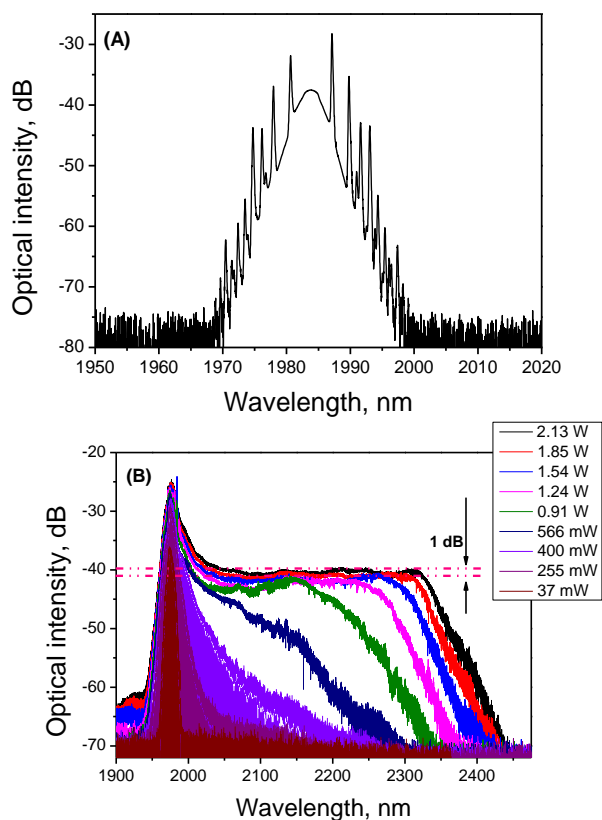


Fig. 7. Seed laser emission spectrum (a), the evolution of the spectra in relation to the output power (b).

After amplification of the pulses we achieved the maximum average output power of 2130 mW. The maximum pump power of the amplification cascade reached 14.4 W with the slope efficiency of 17%. Optical gain was detected at 2.2 W of the amplifier pump power. Increasing the amplifier pump power up to ~ 3.3 W was accompanied by the output power increase

without notable broadening of the spectrum. Starting from the amplifier pump power of 3.3 W, the SC formation took place.

Figure. 7b shows the evolution of the spectra in relation to the output power. The spectrum had a flatness of 15 dB at the wavelength range of 1.95-2.4 μ m and less than 1 dB at the wavelength range of 2.02-2.34 μ m. The spectral brightness reached 4.7 mW/nm.

D. SC in single-mode step-index chalcogenide fiber

In this section we focus on an approach, where supercontinuum generation is produced using an external step-index single-mode chalcogenide fiber. We used the Raman soliton MOPA (Fig. 1) as a pump source. The experimental setup for SC generation in the chalcogenide fiber is schematically shown in Fig. 8.

The laser output was focused by a lens and coupled into the nonlinear fiber. The emission from the fiber output was delivered either to spectrometer or to power meter. The launched energy was varied by changing the MOPA energy. The back reflection from input facet of the nonlinear fiber did not affect the stable operation of MOPA, which had a fiber optical isolator at the output.

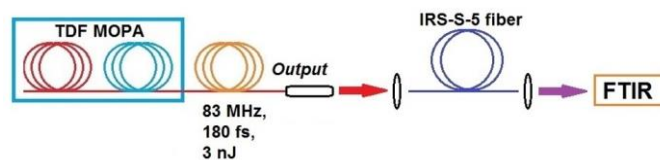
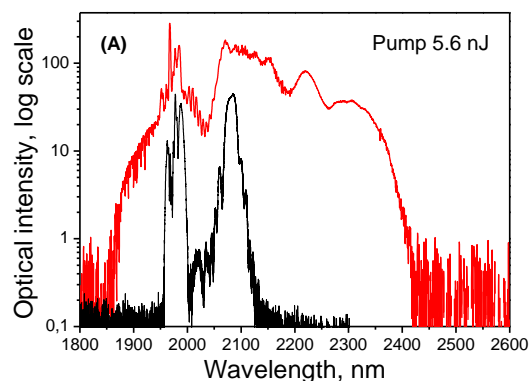


Fig. 8. Schematic of the setup for mid-IR femtosecond supercontinuum generation in nonlinear fibers.

As a nonlinear fiber, we used a 15 cm piece of the step-index single-mode chalcogenide fiber IRF-S-5 produced by IRflex. The fiber had the core diameter of 5 μ m and the cladding diameter of 100 μ m, the NA was 0.3. The zero dispersion wavelength was estimated to be 6 μ m.

Figures 9(a-d) show the evolution of the spectra before and after propagation through 15-cm nonlinear fiber for different pump energies. The pulse energy of pump varied from 5.6 to 9.7 nJ, resulting in the increase of the energy of the output pulses from 1.1 to 2 nJ. The coupling efficiency into the chalcogenide fiber was 20 - 25%. Figure. 9d shows the broadest spectral coverage of 680 nm, from 1850 to 2530 nm. The output power in (d) reached 168 mW. The spectra had flatness of ~ 9 dB at the wavelength range of 2.02-2.45 μ m.



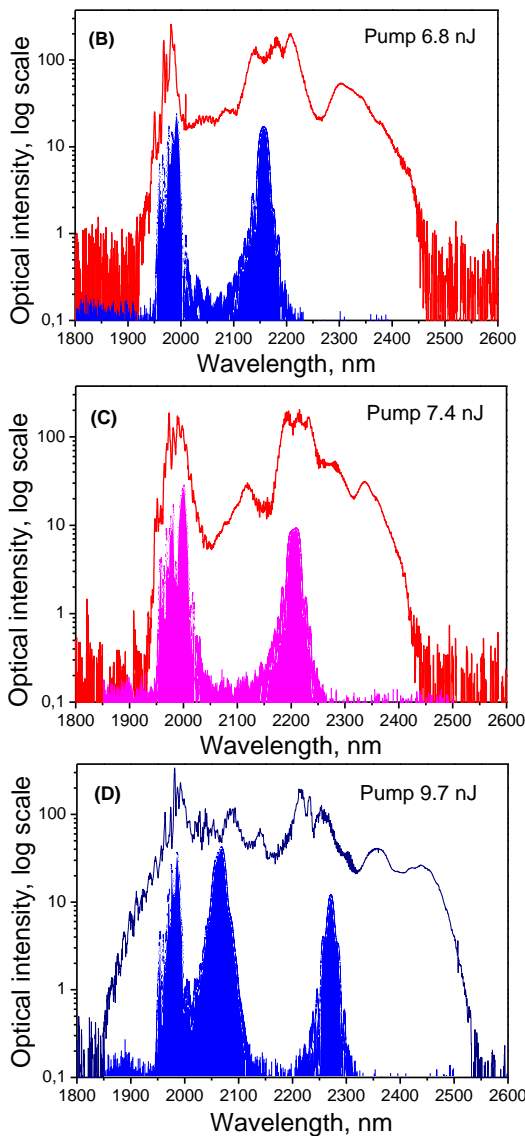


Fig 9. Spectra of femtosecond pulses after propagation in 15 cm step-index single-mode chalcogenide fiber IRF-S-5 at different pump pulse energies.

So far as in our experiment the fiber had a normal dispersion, there was no pulse self-compression and solitons were not supported. The <200-fs pulses from the MOPA output suffered substantial dispersive broadening during the first millimeters of a nonlinear fiber, where the strongest SPM occurred. The elongation of the fiber did not much affect the SC efficiency, and the 15-cm length was chosen as the minimal convenient length to work with.

The experimental results confirm that high nonlinearity of the chalcogenide fiber allows obtaining broader optical supercontinuum at considerably lower pump level, namely, two orders of magnitude lower pulse energy in comparison with the experiment on direct SC generation in TDF MOPA. The use of higher pump power and improved coupling efficiency will allow obtaining even broader spectrum.

III. DISCUSSION

The process of pulse spectral broadening in Raman amplifier in the anomalous dispersion regime can be understood as

follows: when the energy of the picosecond fundamental soliton with soliton number $N=1$ rapidly increases due to the amplification, the self-phase modulation leads to the gradual spectral broadening of the pulse. At the certain distance much shorter than the dispersion length, the pulse exceeds the maximum soliton energy and eventually breaks up. The sub-soliton will differ from the original picosecond soliton in terms of bandwidth, duration, - and thus energy. Basically it will have the bandwidth corresponding to the SPM-broadened bandwidth of the parental pulse. If its bandwidth is broad enough, the sub-soliton will experience Raman self-frequency shift and time delay [39]. This process occurs at a distance of L_D/N , where N is the soliton number [39], which can occur well within the 4-m long amplifier ($L_D \sim 5$ m for a 1 ps pulse and $\beta = -100$ ps²/km).

As the Raman-shifted sub-soliton experiences self-frequency shift and moves away from the amplifier gain spectral region, its energy will stop to increase. Moreover, the soliton will begin to gradually loose energy, as the fiber passive losses increase towards the infrared spectral region, thus reducing the self-frequency shift speed. At the same time, the parental pulse will still experience the amplification, and at certain point will break-up again forming the second sub-soliton, which will similarly walk off both in time and frequency. We have seen exactly such behavior both in experiment (Fig. 2) and modelling (Fig. 5).

In the Tm-doped fibers, there is an additional mechanism which could facilitate long-wavelength Raman solitons. In the Tm³⁺ ions, two different transitions may contribute to the amplifier gain:

- 1) The ³F₄-³H₆ transition covering the 1.8–2 μm spectral region and
- 2) The ³H₄-³H₅ transition covering the 2.2–2.5 μm spectral region [40, 41].

At pumping at 793 nm, the gain in the 1.8–2 μm region occurs following the well-known cross-relaxation mechanism in the Tm³⁺ ion [42], which populates the ³F₄ level. This process requires high doping concentrations [40, 41]. At Tm³⁺ ion concentrations used in this work the cross-relaxation does not occur with 100% efficiency, so that a certain population is always present at the ³H₄ level. This would provide nonzero gain at the ³H₄-³H₅ transition, which is four-level and which is not saturated by the 1.9 μm radiation. Thus, the Raman-shifted solitons which are generated in the front section of the amplifier would experience an additional amplification in the rear section of the amplifier at 2.2–2.5 μm wavelength region at no extra cost. The contribution of this mechanism is difficult to estimate at this point, given the scarcity of spectroscopic and manufacturer data for the fiber.

If we would consider now the initial pulse to be not a single pulse, but a burst of pulses, which could generally differ from each other in energy and duration, then each of the pulses in a burst would experience the nonlinear effects described above. Still the energy required for the pulse to break-up will remain more or less constant for all pulses in a burst. As a result, every pulse in a burst will break up at its particular distance while keeping comparable energy. Every of Raman soliton will then have different propagation distance and different Raman shift. The superposition of these pulses will lead to the formation of a top-flat supercontinuum.

Moreover, if the considerable amount of a pulse energy is located in the Kelly sidebands, then the sideband itself can be considered as a sub-ns pulse with a very high soliton number [43, 44]. If such a pulse is being amplified, it could lead to the modulational instability effect [16] contributing to the supercontinuum formation. We have to note that the generation of SC through both multiple soliton generation and modulational instability is associated with pulse to pulse fluctuations at the output of the amplifier even if the input from the seed laser is stable. This should lead to decreased level of coherency of the output spectrum – the assumption, which still needs to be verified, and is the subject of a separate study. A separate study is also required to evaluate and compare the individual contributions of the discussed above physical mechanisms to the SC generation inside the amplifier.

Alternatively, the system configuration described in the section 2D produces the SC in the normal dispersion fiber. Here the spectral broadening process is driven by the SPM effect only, and the soliton formation does not take place. Such a mechanism usually results in formation of a highly coherent supercontinuum, subject to the seed pulse is short enough. At the same time the spectral flatness of such a supercontinuum is typically rather low. The difference with the SC produced in the chalcogenide fiber in the normal dispersion region is distinctly observable (Fig. 10).

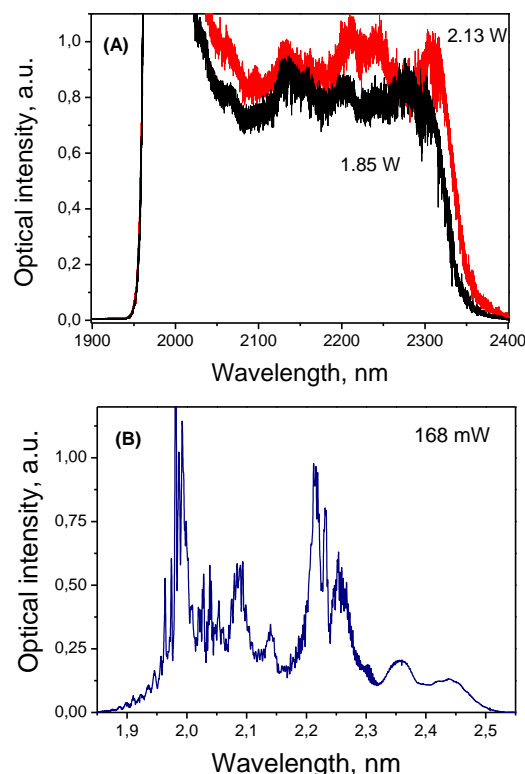


Fig. 10. Spectra of SC generated directly from MOPA (a) and from chalcogenide fiber (b) shown in linear scale.

In spite of the fact that output powers of tens of watts from similar systems have been already demonstrated, many applications require significantly lower output powers. High peak and average power required for generation of SC in silica-glass fibers can be an issue for a number of applications and subsequent attenuation is an inefficient and potentially

dangerous solution. Therefore, a low-repetition rate seed laser, coupled to highly nonlinear fiber is a cost-effective and promising way. We used chalcogenide fiber and achieved SC generation in the slightly wider band but at sufficiently low optical powers. Thus, it was <200 mW as compared to 2 W of output power for the SC generated in the silica-based fiber.

IV. CONCLUSION

We reported two SESAM mode-locked, femtosecond, thulium-doped-silica-based fiber MOPAs, operating in the Raman soliton regime and high-energy supercontinuum generation regime, respectively.

In case of the Raman soliton MOPA, laser generated 5-nJ spectrally tunable <200-fs pulses (1.98–2.22 μm) at the repetition-rate of 83 MHz with total average output power up to 0.8 W. While analyzing the system, we have accessed the stability and performed the theoretical modeling of the pulse evolution in the amplifier. The later show the good conformity of theoretical and experimental results.

In case of SC MOPA this allowed obtaining as broad as 450 nm spectral coverage with 2130 mW maximum average output power. At 7.5 MHz repetition rate, this corresponds to the energy of the SC burst of 284 nJ. The generated spectrum has superior properties making it useful for applications: it has a flatness of less than 1 dB and 4.7 mW/nm (0.6 nJ/nm) spectral brightness. These are the highest energy and energy brightness flat-top femtosecond SC reported obtained directly from the silica-based MOPA in mid-IR wavelength range between 1.9 and 2.5 microns.

Another approach of the supercontinuum generation has been realized by excitation of a single-mode step-index chalcogenide fiber by spectrally tunable Raman soliton TDF MOPA. In this experiment, we obtained the spectral coverage of 680 nm (from 1850 to 2530 nm) at input average power as low as 200 mW. This approach of SC generation allows obtaining even broader spectral coverage than the first one. The use of commercially available simple step-index chalcogenide fiber makes the setup cost-effective. The relatively large core of the fiber makes all coupling procedures easy.

The developed flat-top SC sources show a large potential for the development of simple, compact, low cost, and practical high-energy ultra-short pulse lasers systems for such applications as, for example, trace gas sensing and spectroscopy. The Raman soliton lasers are promising for the use in the experiments, where continuously electronically tunable pulses with relatively high energies are required, for example, in fine material processing and as pump sources for parametric wavelength conversion further into mid-IR.

REFERENCES

- [1] J. Wu, et al., "Highly efficient high-power thulium-doped germanate glass fiber laser," *Opt. Lett.* vol. 32, pp. 638-640, March, 2007.
- [2] S. D. Jackson, et al., *IEEE J. of Selected Topics in Quantum Electronics*, vol. 13, pp. 567-572, May/Jun., 2007.
- [3] I.T. Sorokina, et al., "Mid-IR Ultrashort Pulsed Fiber-Based Lasers", *IEEE J. of Selected Topics in Quantum Electronics*, vol. 20, 0903412, Sept/Oct., 2014.
- [4] V. V. Dvoryn, et al., "6.8 W all-fiber supercontinuum source at 1.9–2.5 μm ," *Laser Phys. Lett.* vol. 11, 085108 (5pp), June, 2014.
- [5] P. Wan, L. Yang, and J. Liu, "High pulse energy 2 μm femtosecond fiber laser," *Opt. Exp.*, vol. 21, pp. 1798-1803, Jan., 2013.

- [6] Y. Chen, et al., "Two-channel hyperspectral LiDAR with a supercontinuum laser source" *Sensors*, vol. 10, pp. 7057–66, Jul., 2010.
- [7] C. Courvoisier, et al., *Laser Phys.*, vol. 14, pp. 507–514, 2004.
- [8] E. Sorokin, Springer NATO Science Series II: Mathematics, Physics and Chemistry (Berlin: Springer), pp. 557–74, 2008.
- [9] S. Kedenburg, et al., *Optics Letters*, vol. 40, pp. 2668–2671, June, 2015.
- [10] F. Leo, et al., *Opt. Exp.*, vol. 22, pp. 28997–29007, Nov. 2014.
- [11] The Supercontinuum Laser Source, Robert R. Alfano, ed. (Springer-Verlag), 1989.
- [12] Tonglei Cheng et al., "Fabrication of a Chalcogenide-Tellurite Hybrid Microstructured Optical Fiber for Flattened and Broadband Supercontinuum Generation," *JLT*, vol. 33, pp. 333–338, Jan. 2015.
- [13] Weiqiang Yang, et al., "High power all fiber mid-IR supercontinuum generation in a ZBLAN fiber pumped by a 2 μm MOPA system", *Opt. Exp.*, vol. 21, pp. 19732–19742, Aug. 2013.
- [14] Weiqiang Yang, et al., "Thirteen watt all-fiber mid-infrared supercontinuum generation in a single mode ZBLAN fiber pumped by a 2 μm MOPA system", *Opt. Lett.*, vol. 39, pp. 1849–1852, April. 2014.
- [15] Petersen, C. R. et al. "Mid-infrared supercontinuum covering the 1.4–13.3 μm molecular fingerprint region using ultra-high NA chalcogenide step-index fibre," *Nature Photon.* Vol. 8, pp. 830–834, Sept. 2014.
- [16] A. Demircan, et al., "Supercontinuum generation by the modulation instability," *Opt. Commun.*, vol. 244, pp. 181–185, Jan., 2005.
- [17] V.V. Alexander et al., *Opt. Lett.*, vol. 38, pp. 2292, July. 2013.
- [18] Ke Yin, et al., "Over 100 W ultra-flat broadband short-wave infrared supercontinuum generation in a thulium-doped fiber amplifier," *Optics Letters*, vol. 40, pp. 4787–4790 Oct. 2015.
- [19] M. A. Chernysheva et al., "Higher-order soliton generation in hybrid mode-locked thulium-doped fiber ring laser," *Selected Topics in Quantum Electronics, IEEE J.*, vol. 20, pp. 425–432, Sept., 2014.
- [20] M. A. Chernysheva et al., "SESAM and SWCNT mode-locked all-fiber Thulium-doped lasers based on the nonlinear amplifying loop mirror," *Selected Topics in Quantum Electronics, IEEE J.*, vol. 20, pp. 448–455, Sept., 2014.
- [21] V. V. Dvoyrin, D. Klimentov, I. T. Sorokina, "3W Raman Soliton Tunable between 2–2.2 μm in Tm-Doped Fiber MOPA," OSA Technical Digest (online) (OSA), paper MTh1C.2, 2013.
- [22] P.G. Imeshev, M.E. Fermann, "230-kW peak power femtosecond pulses from a high power tunable source based on amplification in Tm-doped fiber," *Opt. Exp.*, vol. 13, pp. 7424–7431, Sept., 2005.
- [23] J. Jiang, A. Ruehl, I. Hartl, M. E. Fermann, "Tunable coherent Raman soliton generation with a Tm-fiber system," CLEO, Baltimore, Maryland, USA, CThBB5, 2011.
- [24] E. A. Anashkina et al., "Generating femtosecond optical pulses tunable from 2 to 3 μm with a silica-based all-fiber laser system," *Opt. Lett.* vol. 39, pp. 2963–2966, May, 2014.
- [25] H. Hoogland, S. Wittek, W. Hänsel, S. Stark, and R. Holzwarth, "Fiber chirped pulse amplifier at 2.08 μm emitting 383-fs pulses at 10 nJ and 7 MHz," *Opt. Lett.*, vol. 39, pp. 735–738, Dec., 2014.
- [26] D. Klimentov, et al., *JLT*, vol. 30, pp. 1943–1947, June, 2012.
- [27] I. H. Malitson, "Interspecimen Comparison of the Refractive Index of Fused Silica," *J. Opt. Soc. Am.*, vol. 55, pp. 1205 Oct., 1965.
- [28] Dawn Hollenbeck and Cyrus D. Cantrell, "Multiple-vibrational-mode model for fiber-optic Raman gain spectrum and response function," *J. Opt. Soc. Am. B.*, vol. 19, pp. 2886–2892, July, 2002.
- [29] P. Peterka, et al., "Thulium-doped silica-based optical fibers for cladding-pumped fiber amplifiers," *Opt. Mater.* vol. 30, pp. 174–176, Sept., 2007.
- [30] S. D. Jackson and T. A. King, "Theoretical modeling of Tm-doped silica fiber lasers," *J. Lightwave Technol.*, vol. 17, pp. 948, Jan., 1999.
- [31] B. M. Walsh and N. P. Barnes, "Comparison of Tm : ZBLAN and Tm : silica fiber lasers; Spectroscopy and tunable pulsed laser operation around 1.9 μm ," *Appl. Phys. B.*, vol. 78, pp. 325, Feb., 2004.
- [32] Spector, N., R. Reisfeld and L. Boehm, *Chem. Phys. Lett.* vol. 49, pp. 49–53, July, 1977.
- [33] Jackson, S.D., "The spectroscopic and energy transfer characteristics of the rare earth ions used for silicate glass fibre lasers operating in the shortwave infrared," *Laser & Photon.Rev.*, vol. 3, pp. 466–482. Sept., 2009.
- [34] T. Kato, Y. Suetsugu, and M. Nishimura, "Estimation of nonlinear refractive index in various silica-based glasses for optical fibers," *Opt. Lett.*, vol., 20, pp. 2279–2281, July, 1995.
- [35] A. Ben Salem, R. Cherif, and M. Zghal, "Raman Response of a Highly Nonlinear As₂Se₃-based Chalcogenide Photonic Crystal Fiber," *PIERS Proceedings*, Marrakesh, MOROCCO, pp. 1256–1260, March, 2011.
- [36] G. Salceda-Delgado, et al., "Raman response function and Raman fraction of phosphosilicate fibers," *Opt. Quant. Electron.*, May, 2012.
- [37] Rob Billington, "Effective Area of Optical Fibres - Definition and Measurement Techniques," NPL, [Online]. Available: www.npl.co.uk/upload/pdf/aeff_ver3.pdf
- [38] Yu Feng Song, et al., "Vector multi-soliton operation and interaction in a graphene mode locked fiber laser," *Opt. Exp.*, vol. 21, pp. 10010–10018, Apr., 2013.
- [39] J. M. Dudley, et al., "Supercontinuum generation in photonic crystal fiber," *Rev. Mod. Phys.* vol. 78, pp. 1135–1184, Oct., 2006.
- [40] J. F. Pinto, et al., "Tm³⁺:YLF laser continuously tunable between 2.20 and 2.46 μm ," *Opt. Lett.* vol. 19, pp. 883–885, June, 1994.
- [41] V. Sudesh and J. A. Piper, "Spectroscopy, modeling, and laser operation of thulium-doped crystals at 2.3 μm ," *IEEE J. Quantum Electron.*, vol. 36, pp. 879–884, July, 2000.
- [42] I. T. Sorokina, "Crystalline Mid-Infrared Lasers," in Solid-State Mid-Infrared Laser Sources, I. T. Sorokina and K. Vodopyanov, eds. (Springer Berlin / Heidelberg), pp. 262–358, 2003.
- [43] Q. Lin, I. Sorokina, "High-order dispersion effects in solitary mode-locked lasers," *Opt. Commun.*, vol. 153, pp. 285–288, August, 1998.
- [44] X. Liu, Y. Cui, D. Han, X. Yao, Z. Sun, "Distributed ultrafast fibre laser," *Scientific reports*, vol.5, article 9101, March, 2015.