

# Accepted Manuscript

Outlook of carbon capture technology and challenges

Tabbi Wilberforce, A. Baroutaji, Bassel Soudan, Abdul Hai Al-Alami, Abdul Ghani Olabi



PII: S0048-9697(18)34779-X  
DOI: <https://doi.org/10.1016/j.scitotenv.2018.11.424>  
Reference: STOTEN 29773  
To appear in: *Science of the Total Environment*  
Received date: 10 October 2018  
Revised date: 28 November 2018  
Accepted date: 28 November 2018

Please cite this article as: Tabbi Wilberforce, A. Baroutaji, Bassel Soudan, Abdul Hai Al-Alami, Abdul Ghani Olabi , Outlook of carbon capture technology and challenges. Stoten (2018), <https://doi.org/10.1016/j.scitotenv.2018.11.424>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

## Outlook of Carbon Capture Technology and Challenges

*Tabbi Wilberforce<sup>1</sup>, A. Baroutaji<sup>2\*</sup>, Bassel Soudan<sup>3</sup>, Abdul Hai Al-Alami<sup>3</sup>, Abdul Ghani Olabi<sup>3,4</sup>*

1. Institute of Engineering and Energy Technologies, University of the West of Scotland, UK
2. School of Engineering, Faculty of Science and Engineering, University of Wolverhampton, UK
3. Dept. of Sustainable and Renewable Energy Engineering, University of Sharjah, P.O. Box 27272, Sharjah, UAE
4. School of Engineering and Applied Science, Aston University, Aston Triangle, Birmingham B4 7ET, UK

---

### Abstract

The greenhouse gases emissions produced by industry and power plants are the cause of climate change. An effective approach for limiting the impact of such emissions is adopting modern Carbon Capture and Storage (CCS) technology that can capture more than 90% of carbon dioxide (CO<sub>2</sub>) generated from power plants.

This paper presents an evaluation of state-of-the-art technologies used in the capturing CO<sub>2</sub>. The main capturing strategies including post-combustion, pre-combustion, and oxy – combustion are reviewed and compared. Various challenges associated with storing and transporting the CO<sub>2</sub> from one location to the other are also presented. Furthermore, recent advancements of CCS technology are discussed to highlight the latest progress made by the research community in developing affordable carbon capture and storage systems. Finally, the future prospects and sustainability aspects of CCS technology as well as policies developed by different countries concerning such technology are presented.

**Keywords:** Carbon dioxide, Absorption, gasification, membrane, Storage

## 1. Introduction

Global warming is a major issue for most research centers and governmental institutions around the world [1 – 5]. It occurs due to high amounts of CO<sub>2</sub> in the airspace. Currently, most countries around the world still rely heavily on fossil commodities, which release significant amounts of CO<sub>2</sub>, for power generation where almost 85% of power generated across the globe is from fossil fuel [6 – 9]. A drastic substitution of the traditional power plant with alternative clean energy generation mediums, which produce no CO<sub>2</sub>, is virtually impossible in the near future. Therefore CCS technology has received increased awareness by research community. CCS technology helps in reducing carbon dioxide in the atmosphere that lead to depletion of the ozone layer and climate change [10]. It is expected that the next few years will see CCS as one of the cheapest methods for minimizing greenhouse gases [11, 12]. Main steps for implementing CCS in any power plant are presented in Fig. 1.

The CCS process starts with capturing the carbon dioxide generated by the biomass or fossil commodities. The carbon dioxide then undergoes a compression process to form a dense fluid. This helps in transporting the CO<sub>2</sub> as well as storing it. Dense fluid is transported via pipelines and then injected in an underground storage facility.

The current CCS technologies are generally very expensive and significant developments are needed to develop a more affordable CCS technology. Thus, the main objective for this investigation is to review CCS technologies and to explore the recent efforts made by the scientific community to come out with a new approach that can reduce the overall cost of this vital technology [13].

## 2. CO<sub>2</sub> capturing technologies

Significant amounts of CO<sub>2</sub> are produced during the combustion of natural gas. This amount of CO<sub>2</sub> is either directed towards the atmosphere or used in manufacturing plants to produce other commodities as in food processing industry [14]. However, small quantity of the generated carbon dioxide is reused by manufacturing industry as well as most of the carbon dioxide eventually ends up in the atmosphere [15].

Several strategies for capturing carbon dioxide from gaseous mixtures have been designed and utilized in the industry. Fig. 2 depicts the recent technologies used for capturing carbon dioxide. The type of technology is determined by the purity and state of the gas in relation ambient conditions surrounding the CO<sub>2</sub> [16]. Carbon dioxide capturing systems help in elimination of pollutants from the carbon dioxide during natural gas refining process as well as the generation of H<sub>2</sub>, NH<sub>3</sub> and other chemicals for industrial purposes.

Overall aim for all carbon capture and storage technologies is to generate carbon dioxide that can be stored in a geological formation. To materialize this, carbon dioxide must be compressed to a liquid state in order to be transported easily through pipelines and eventually pumped into a geological formation. The carbon compression stage can thus be defined as part of the CCS system [17, 18]. Today, the technologies utilized for CCS are grouped as pre – combustion or post – combustion systems. These technologies are named depending on the timing when the carbon is eliminated that is prior or after the fossil fuel combustion [16]. There is another CCS technology, known as the oxyfuel or oxy – combustion, which is still under developmental stages and it requires sometime before it becomes commercially acceptable. The technology used by power plants is similar to that used by some industrial activities devoid of burning.

## 2.1 CO<sub>2</sub> Separation techniques for CCS

### 2.1.1 Physical absorption

There are two main stages with the physical absorption process. These are the absorption and stripping process. The absorption process involves treated gas being in contact with solvent stream and the CO<sub>2</sub> being captured by the solvent physically. The stripping involves CO<sub>2</sub> and solvent which is normally saturated is introduced to heat to produce new solvent and releasing the CO<sub>2</sub> at the apex of the stripping Chamber. Extent of CO<sub>2</sub> absorption for solvent is built around Henry's law. Dissolution of CO<sub>2</sub> in the liquefied solvent is due to electrostatic forces. Low temperature as well as high pressure are the best operating conditions for Physical absorption. Other conditions like high temperature but low pressure affects physical desorption. Physical absorption has good absorption characteristics compared to chemical absorbent [19,20]. Its regeneration can be achieved via depressurization operation at low energy demand. This is the main reason for their dominance in pre-combustion carbon capture technology. They are useful in IGCC power plants elimination of carbon dioxide from synthesis gas, natural gas treatment as well as acid gas recovery as well. It must be noted that the capacity for absorption absorbent is useful at lower temperatures physically. It implies that reducing the temperatures of treated gas streams before absorption is very important [21]. The well-known physical absorption process involves Selexol, Rectisol, Purisol and Fluor method.

### 2.1.2 Adsorption

Adsorption is slightly different from absorption because adsorption includes specific creation of physical and chemical connection between CO<sub>2</sub> and surface of the adsorbent. The adsorbed CO<sub>2</sub> then disappear via pressure swing adsorption (PSA) or temperature swing adsorption (TSA) in order to regenerate the adsorbent material. The adsorbent which is saturated is heated in Temperature swing adsorption to operating conditions at which physical and chemical bond is

disintegrated leading to the detachment of adsorbed reactants but for pressure swing adsorption there is reduction of pressure to generate the same effect. When the  $\text{CO}_2$  concentration is insignificant, temperature swing adsorption is often used but when the  $\text{CO}_2$  concentration is high PSA is preferred [22, 23]. Pressure swing adsorption is useful because of its short temporal need for regenerating the adsorbent. Some well-known physical adsorbent are zeolite and amine sorbents

### 2.1.3 Membrane Technology

Knudsen diffusion principle is the phenomenon that leads to membrane separation.  $\text{CO}_2$  dissolves in the membrane and diffuse via rate proportional to its partial pressure gradient. Utilization of non-facilitated membrane technology is predominant in  $\text{CO}_2$  elimination from natural gas and where the carbon dioxide partial pressure is high. In capturing carbon from flue gas because the carbon dioxide is less, there would be more energy imposed because compression work is need to support enough driving force to obtain the required carbon capture ratio. Enhancement of its selectivity is dependent on how permeable the membrane is designed to be. It implies that even though it has many merits like low environmental effect and degradation, integrating it to power plant already in existence poses a challenge. Researchers today are investigating on many ways of averting this challenge. The facilitated transport membrane separation is one of the newly designed approach recommended by researchers around the world. It is made up of mobile or liquid phase carrier that support movement of  $\text{CO}_2$  as bicarbonate. This will support the permeability as well as the selectivity of  $\text{CO}_2$  across the membrane. The mixed matrix membrane is also new type of membrane technology [24 – 26]. They are made up of polymer membranes fillers. Some of the fillers are; zeolite, mesoporous silica and zeolitic imidazolate. These modified membranes reduce the processing cost and increase permeability. The strength and stability with respect to heat for these membranes are

very good. Other new type of membrane separation technology is the gas membrane contactor. These types of membranes are not dependent on the Knudsen diffusion approach. The membranes for the gas membrane contactor only act as a point of application between the flu gas as well as CO<sub>2</sub> absorption solvent. They show compactness of the membrane system and high selectivity of amine-based absorption process. Their main demerits are that there are limitations in terms of mass transport because of resistance on the membrane framework.

#### **2.1.4 Cryogenic Separation**

This approach involves several compression applications at ambient temperature as well as pressure for separating the gas. This technique is suitable for producing liquid carbon dioxide [26]. It is ideal for carbon dioxide capture in high concentrations. This technology can also be used in place of amine-based scrubbing method because it utilizes water in lesser quantity, uses cheap chemical agents, corrosion resistant and less effect on the environment in terms of pollution. This concept also supports ambient pressure operation as well as liquid CO<sub>2</sub>. They therefore support CO<sub>2</sub> transmission economically. Cryogenic separation has some limitations too [27]. It is energy intensive due to the operating temperature range being low hence high cost of operation. Formation of ice in cryogenic approach often causes the piping system being blocked and this reduces the drop-in pressure causing safety issues. It therefore becomes important that the amount of moisture is removed before the separation process. This process adds to the initial cost of using this technology.

#### **2.2 Pre – combustion approach**

This technology employs the separation of carbon dioxide from fossil commodities prior to burning process being started [28]. This technology can further be explained as a reacting fuel and O<sub>2</sub> gas to generate carbon monoxide, hydrogen as well as fuel gas. A pure hydrogen fuel stream is obtained after the removal of carbon dioxide [29]. By means of integrated gasification,

carbon dioxide can be obtained. The technology is also applicable to power plants that uses natural gas [30,31]. Fig. 3 shows a diagram of carbon dioxide capture using the pre combustion technology approach. Table 1 also capture recent studies conducted in this field.

The first major step conducted during the elimination of carbon from fuel is to change the fuel to a form that is quite easy to capture. A reaction between coal with steam and oxygen gas is the usual phenomenon for power plants fueled by coal and the reaction occurs at higher temperature as well as pressure [30]. End product of this reaction is a fuel made up of CO as well as mixture of hydrogen called syngas. This gas can further go through a combustion process to produce power in power plant. The power generated is often referred to as Integrated Gasification Combined Cycle (IGCC) power. In second step of this process, the carbon monoxide obtained in first step is transformed into carbon dioxide via a reaction with steam. This leads to the formation of carbon dioxide and hydrogen.

A glycol solvent, known as Selexol, is used to trap the carbon dioxide through a chemical process. This results in purified hydrogen gas which goes through another plant to produce power shown in Fig. 3(a). Easy and cheaper separation of carbon dioxide due to the operating pressure being high as well as excellent concentrations of carbon dioxide using IGCC plants makes them the mostly preferred option by the research community even though they are very expensive compared to the traditional coal combustion plants. The operational approach for pre-combustion includes absorption physically, then releasing the CO<sub>2</sub> once the sorbent pressure drops, as depicted in Fig. 3(b), instead of using a chemical approach to trap the carbon dioxide like using amine systems in post combustion capture. The use of IGCC involves some limitations as there are some loss in energy during the carbon dioxide capture because of the shift reactor and other steps involves in this process.



It is also possible to use pre – combustion carbon dioxide capture in power plants that utilizes natural gas. Using natural gas as fuel involves conversion of the gaseous fuel to synthesis gas through reactions with  $O_2$  often referred to as reforming. Concentrated carbon dioxide and hydrogen is produced [19 - 35]. It must be noted that this method is very expensive compared to using natural gas as fuel but in post combustion capture approach.

### **2.3 Post- combustion approach**

The post combustion carbon capture (PCC) absorbs the carbon dioxide produced by the flue miasma after fossil commodities or materials made of carbons undergo a combustion process. The greatest quantity of electricity used by the world in recent times is obtained from power plants that functions through a combustion process. The main process in coalfired power plants used today is the burning of coal fused with air in a boiler or a furnace [36]. The process is an exothermic reaction and the steam released is used to run a turbine generator shown in Fig. 4.

The high temperature gases that flows out of the boiler is made up of nitrogen from air and water vapor in smaller concentrations. There is also carbon dioxide produced from the hydrogen and carbon from the fuel used. Sulfide dioxide ( $SO_2$ ), nitrogen oxide (NO) and fly ash (particulate matter) are also formed due to the burning of impurities in coal. These toxic gases and others like mercury must be eliminated as they are considered as pollutants according to emission standards [37]. In some situations, elimination of pollutants like  $SO_2$  helps in the provision of pure gas stream for capturing  $CO_2$  [37]. Chemical reaction is described by scientists as the outstanding option for capturing  $CO_2$  from flu gases of a pulverized coal plant but a solvent called monoethanolamine (MEA) is also required to facilitate the chemical reaction process. MEA is a member of the amine compound. The flue gas is first scrubbed in a vessel called an absorber. The absorber helps in the capturing around 85% to 90% of the  $CO_2$  produced.  $CO_2$  in a form of a solvent is injected into another vessel named as the regenerator or the stripper. In the second

vessel, the release of CO<sub>2</sub> involves usage of steam. The CO<sub>2</sub> produced after this process is highly concentrated [38]. The gas is compressed as well as conveyed to a location where they can be stored. The solvent used in the process is the forced back and recycled to the absorber. A detailed post combustion capturing of carbon dioxide is shown in Fig. 5 [39].

This technological approach is suitable for capturing carbon dioxide at pulverized coal power plant as well as at a natural gas fired boiler. Fig. 6 explains this methodology. The coal plants often have the flue gas carbon dioxide concentration being denser compared to the natural gas combined cycle, NGCC, but it is still possible to obtain high removal efficiencies even with the amine based capture systems [40]. The natural gas has no impurities hence the flue gas stream is very clean. This implies that there will be no need for any cleanup for capturing the CO<sub>2</sub> effectively [41, 42]. Table 2 captures the recent studies for post combustion in carbon dioxide capture.

#### **2.4 Oxy – combustion approach**

An option to post-combustion process, the oxy-combustion method has recently been developed as CO<sub>2</sub> capturing technology. This process uses pure oxygen in the combustion process and this reduces the quantities of nitrogen [43 – 45]. Fly ash is also eliminated from flue gas stream resulting in the flue gas which only made up of CO<sub>2</sub> and water droplets as well as some impurities like sulfur dioxide. Compression and reducing the temperature of the flue gas is a medium used in the removal of the water vapor [46]. This process leaves behind pure carbon dioxide which is storage directly as shown in Fig. 7. One advantage of oxy – combustion over post combustion is the avoidance of an expensive CO<sub>2</sub> capture system for post combustion [47 – 48]. In place of a CO<sub>2</sub> capture systems for post combustion, the oxy combustion uses air separation unit (ASU) to produce clean oxygen with around 95% to 99% purity for oxyfuel systems compared to Integrated Gasification Combined Cycle plant of the same volume [49]. Air

separation unit affects the cost significantly. Extra gas transformation is often required to limit the air pollutant concentration in order to meet the correct environmental guideline. This will further reduce a build of unwanted materials in the flue gas recycle [49 – 54].

Temperature for burning using pure oxygen is greater than air hence oxy combustion involves huge portion of the stream for the flue gas being used back in the boiler to maintain optimal operating temperature. Recent oxy fueled boilers come in designs to reduce recycle using slagging combustors or non – stoichiometric burners. Sealing of the system is another important stage in the design to maintain the needed oxygen and nitrogen found in the gas. Sealing prevents air leakages into the flue gas. This is considered as one of the most difficult maintenance issues because the leakages at the flanges and joints are difficult to prevent especially along the flue gas duct [55]. There has been several research work conducted on 30MW thermal plant that uses the oxy combustion technology. Oxyfuel systems requires gas treatments to eliminate pollutants from the system and this reduces the efficiency of the system to 90%. It is possible to apply the concept of oxy combustion in a simple cycle. Table 3 also shows some current research conducted using the oxy combustion technology. Fig. 8 shows the CCS technology as well as sources from different commodities like cement, steel production and bioethanol plants. The bioethanol plants produce food grade carbon dioxide from fermenters. This investigation explores the main technological advancement made in recent times with respect to carbon capture [56]. Table 4 shows some recent advancement made in this technology.

## **2.5 Comparison of the various carbon capture capacity between 2006 - 2018**

Carbon capture and storage involves large sequestration of CO<sub>2</sub> from well-known origins followed by separation from the atmosphere as well as its usage in futuristic terms. It is a solution designed for a situation where high emissions of carbon dioxide due to high energy consumption and high dependency on fossil commodities becomes unavoidable. It is a suitable

approach for carbon separation from high CO<sub>2</sub> plants. Well known areas where carbon capture and storage can be utilized are generation plants and manufacturing divisions. From Fig. 9, the carbon emissions is likely to exceed 32.27 billion tonnes by 2018. Researchers anticipates that by the year 2020, this quantity of CO<sub>2</sub> emissions is likely to increase appreciably to 35.63 billion as well as 43.22 billion by 2040. This increase according to researchers will emanate largely from developing countries. 33.4 million tonnes of CO<sub>2</sub> can be captured annually in spite of all the carbon capture and storage facilities across the world. This is 0.09% of the total projected carbon emissions. To combat climate change, expansion of CCS technology will be a necessity.

From Fig. 9, it is observed that between the year 2006 to 2018, the number of commercial carbon capture facility for post combustion has surged up from from 16 to 30. This indicates a high increase compared to pre combustion. It therefore explains the increase in carbon capture capacity from 26000 Tonnes per day in 2006 to 50,000 tonnes per day in 2018. Pre – combustion was nearly zero between 2006 to 2014 but after 2014, the capacity has increased to nearly 7000 tonnes per day in 2018. Table 5 also captures other technology for carbon capture but with insufficient large scale experience.

Table 6 captures comparison between the three main CCS technologies; post combustion, pre-combustion and oxyfuel combustion. Fig. 9 explains projected values for commercialized CCS across the world. From Table 6, it is observed that oxyfuel combustion capture system presently has no carbon capture storage. Most established CCS technology is the post combustion technology. Researchers are also investigating on solid sorbent technologies in order to improve their performance. Pre-combustion technology is described as the best alternative to mitigate this challenge. A clear comparison for all the three types of CCS technology is shown in Table 6.

## 2.6 Transportation and storage of captured CO<sub>2</sub>

The captured carbon dioxide always needs to be transported from the capturing site to the storage site. The key consideration that should be taken during the transportation of carbon dioxide are the compression of the gas to a supercritical state, pipeline corrosion and the effect of fluid composition on the power that will be consumed [89 – 103]. This can be achieved by recompressing the pipeline at distance beyond 150 km. Transporting the carbon dioxide using pipelines in bulk reduces the overall cost of the carbon capture and storage system. This is considered a matured technology in the carbon capture and storage system. For over 40 years, this technology has been adopted in the transportation of 50 Mtpa carbon dioxide via 3600 miles [104]. Sharing the transportation network is one method of reducing cost. An in depth knowledge on the thermodynamic and transport characteristics of carbon dioxide mixtures is very necessary when designing a carbon capture system. Majority of the overall cost for the transportation and storage of the carbon dioxide in a carbon capture and storage system occurs at the compression stage of the carbon dioxide stream. An attempt to capture carbon dioxide at higher pressure reduces the compression power at downstream.

In the last few decades, several geological sites have been used for storing CO<sub>2</sub> such as saline aquifers, depleted basins and enhanced oil recovery [105]. There are some requirements for any storage sites to be suitable for storing CO<sub>2</sub>. The formation of the site must be porous and permeable for easy injection of huge volumes of carbon dioxide. Also, it must have rock caps for the imprisonment of the carbon dioxide and prevention of any potential leaking. Storing carbon dioxide in an abandoned oil field is also appropriate because most of these sites become impermeable after holding oil and gas for several years. These reservoirs have some disadvantage as well as they are often penetrated by other wells damaging the seal. Retaining the

carbon dioxide carbon dioxide is achieved through a trapping mechanism: a) stratigraphic and structural (primary trapping occurs beneath seals of low seals of low permeability rocks, dominant at early stage); b) residual (Using water capillary pressure, trapping is achieved via rock pores c) Solubility (residual gas trapping) and d) mineralization (changing the pore – space topology and connectivity). There is precipitation of carbonates at the last stage of the storing process and this is likely to block the pathway for the fluid and there is also finally a loss of the storage pore volume [105].

Other researchers investigated the direct relationship between injection and induced seismicity for a long term and concluded that this storage process could lead to earth quakes but the leakage of carbon dioxide is not a major challenge in terms of scaling up carbon capture and storage systems. The cost for the injection is approximately 0.5 – 8 \$/tCO<sub>2</sub>. A combination of enhanced oil recovery with a storage system will reduce the overall cost.

### **3. Application of the various CCS technologies**

For commercial and industrial power plants, post-combustion carbon dioxide capture is considered the matured type of technology compared to the others. . Using solvent for the carbon dioxide capture is very important in post-combustion in the capture of carbon dioxide. Today, researchers are also exploring the various type of solvent, design and an integrated solvent design for the capture of carbon dioxide. Other investigations into the selection systematically and design of solvent for post-combustion carbon dioxide capture using several predictive methods have all been explored [106,107]. Several computational and statistical strategies have all been used during the investigation. For instance, the fluid theory family approach and quantitative structure property relationship have all be utilized during the conduction of an investigation [108,109]. Using universal quasi – chemical functional group activity coefficient approach has been designed for the capture of carbon dioxide [110]. Other researchers attempted

the possibility of adding the solvent selection process with the carbon dioxide capture process [111-118].

For renovation of existing power plants, post combustion carbon dioxide capture is considered the best of options. This method has thoroughly been investigated as a medium of enhancing the performance of any equipment. As explained earlier, several numerical studies and modelling research work has been conducted using the approach [119]. Due to the gas volume being low, pressure being high and the amount of carbon dioxide also being high, less energy is often required for pre combustion carbon dioxide. Less amount of water consumption is observed for pre-combustion compared to post-combustion. An alternative fuel generated for pre-combustion is hydrogen/syngas [120]. The oxyfuel – combustion is considered more environmentally friendly compared to the other two methods. There is no need for any operations being done chemically for this types of carbon dioxide capture technology and also suitable for several types of coal fuels [121-125]. It is simple to renovate it compared to the other types like the post-combustion capture system. This approach has high efficiency in terms of carbon capture. Some advantages of this type of carbon dioxide capture technology is the fact that the equipment size is reduced, the air separation technology is high, it is well suited for conventional, efficient steam cycle with less modifications and the removal of NO<sub>x</sub> control as well as the carbon dioxide separation stage makes it very advantageous [126-132].

### **3.1 Capturing of carbon from exhaust gases**

There is always a capturing energy penalty of 15% to 30% for power plants operated using carbon and this contributes to almost –85% of the carbon capture and storage expenditure [133]. To develop a carbon fired plant with an efficiency of 33% involves decreasing the power output by 1/3 and this increase the capital expenditure to approximately 77% [134]. Power plants fired by carbon have varying carbon dioxide emissions because of the variation in the fuel used but

power plants fired by coal produces 1116 gCO<sub>2</sub>/KWh at 30% and 669 gCO<sub>2</sub>/kWh at 50% efficiency [135]. Even though coal is considered carbon dioxide intensive option, expansion in terms of capacity shows that initiatives for carbon mitigation are low compared to the economic incentives for a relatively cheap fuel. In terms of capital expenditure, natural gas fired power plant is better than power plants fired by coal since half of the capital expenditure for coal fired power plant is required for natural gas powered plant [136]. The overall performance uncertainties are estimated probabilistically [141]. Uncertainties with regards to the capital expenditure are very high at an approximated value of 40% although variability has little influence on the levelized cost of energy (LCOE) [137]. This shows that the operational costs (OPEX) determines the overall cost of carbon capture and storage. Other investigators reported that post combustion capture of carbon dioxide capture using chemical absorption is the most effective and cheapest means of carbon capture and storage technique [138]. The main obstacle is heat demand which increases the operational cost and this also reduces the power capacity. Power plants fired by carbon via hybridization using solar aided post combustion improves the overall efficiency of the plants. There is limitation in terms of the driving force for state of the art membrane permeation compared to chemical absorption in the capture of carbon dioxide from exhaust gases [139]. The reliance of fossil commodities when using coal fired plants can be replaced using renewable energy and this will reduce the fossil commodity that will go into combustion. The energy obtained from renewable energy being intermittent implies that the unit for capturing the carbon must be flexible in order to enhance the economics of the carbon capture. Flexibility is obtained by storing the solvent, removing energy generation from the capture of carbon dioxide to meet energy prices at peak times [96]. The flexibility of capturing unit helps in reducing the capital expenditure to 28% [140]. Capture energy penalty is reduced due to variable capture aligned to energy demand and dispatch and this often leads to increasing



net efficiency and capacity [141]. A practical example is the absorber sized for a time average condition cost approximately 4% less than when it is sized for peak energy generation [141].

### 3.2 Carbon dioxide capture from Natural Gas

Similar to post combustion, natural gas is also dominated by precisely physical absorption [142]. Natural gas processing for Floating Production Storage and Offloading (FPSO) is slightly different from other natural gas processing. For natural gas processing of FPSOs, small area creates a technology niche for membrane permeation because it has low foot print and modularity. For instance the first FPSO started operation in 2010 for the Brazil pre sal oil and gas field [142] and they used membrane separation for separating carbon dioxide. Seven FPSOs were being operated actively in 2016 [100] and six out of the seven were functioning via membrane permeation with each processing approximately 4 – 7 MMscmd of natural gas with almost 20% of carbon dioxide [143]. One of the key factors for the selection of natural gas processing technology is the partial pressure of carbon dioxide in raw natural gas and plant location. Chemical absorption is suitable for low carbon dioxide feed that is less than 20% because higher carbon dioxide content increases solvent recirculation rate and heat duty. Membrane permeation is best suited for medium to higher carbon dioxide partial pressure compare to chemical absorption. Other high carbon dioxide content project could be found in pre-salt field in Brazils' offshore pre oil field (Libra: 48%, Jupiter 78%) and La Barge gas field in Wyoming in the United States but these projects function using cryogenic distillation. The main merit of these projects is the fact that the carbon dioxide produced comes in liquid form which helps in their easy transportation via a pipeline but this advantage come with some challenge as well. When temperatures are low and the liquid is being operated at higher pressures, the carbon dioxide may freeze out and this will required the need for other complex technology like the Ryan Holmes process [140 – 143]. Today, the scientific community has explored several

innovative means of gas and liquid transportation like the Ormen Lang project where natural gas and monoethylene glycol as anti-hydrate are transported via two subsea 120km pipelines [102]. Natural gas in their raw state today can be channeled to an onshore facility for the separation of the carbon dioxide and fractionation of natural gas liquids and the carbon dioxide piped back to an offshore facility [141]. Hybrid processes often uses cryogenic distillation for huge separation, reducing carbon dioxide composition so that chemical or physical absorption can be implemented [142]. Another research conducted was hybrid natural gas processing using membrane permeation for higher removal and chemical absorption [143].

#### **4. Sustainability and socio-economic aspects of CCS technology**

Fossil fuel contributes to more than 80% of current world energy demand [142-144]. It is expected that this estimated figure will drop slightly to 75% by 2035. It stipulates the importance of meeting the world energy consumption without further destruction to the environment. As explained earlier, a method of meeting this high global energy demand is through the application of CCS technology. This approach will aid fossil commodities form part of long-term energy mix. Emissions produced from fossil fuel will drastically be reduced as a result of the introduction of CCS technology. CCS can further sustain the world's high dependency on fossil products in order to meet its' demand. Fossil fuel will surely dominate the worlds energy generation medium in the next couple of years [145-148]. It will safely secure supply of energy without emissions of toxic substances into the atmosphere. CCS can therefore help in global sustainable development because the world energy demand can be achieved without causing harm to the atmosphere.

##### **4.1 Environmental contribution of CCS to sustainable development**

One fundamental principle of sustainable development is the ability to support biodiversity as well as the ecosystem [144]. The effect of CSS technology on the environment is very important.

This is often determined by a constant observation of air, land, water and natural resources. Biodiversity, ecosystem and land for cultivation of crops are sometimes affected due to the implementation of such CCS projects [149,150]. In instances where transportation route are developed via farmlands, food production might reduce. Relocation becomes eminent in some projects in order to develop safe and good infrastructure. Sea life is also sometimes destroyed, making the ecosystem very vulnerable [151]. This is often the case for onshore and offshore projects. This can lead to reversed biodiversity because of the effect on ecosystem and habitats. Risk assessment for application of CCS must also factor into consideration damage of the CCS facility as well as the surrounding environment. Identifying the effect of CCS project on the environment is very necessary. Leakage of CO<sub>2</sub> is another issue related to CCS projects. The leakage of the stored CO<sub>2</sub> as a result of transportation can destroy groundwater, plant life and soil quality. Exposure to high amount of CO<sub>2</sub> can ultimately lead to death. In 2012, Scotland investigated the effect of CO<sub>2</sub> leakage on marine habitat. The investigation concluded that some species reacted negatively as result of an increase in CO<sub>2</sub> [152]

#### **4.2 Social contribution of CCS**

An introduction of CCS in most fossil related projects will increase the number of skilled personnel needed in maintaining the project. It will therefore create more jobs hence improving the livelihood of people. The daily operation of the plants will demand more hands and the storage site will also require consistent observation and monitoring. This will be a job creation avenue for years. Building of the infrastructure will also create jobs even though that might be for a short period of time. It will also support local communities to train more people. An increase in job creation will stabilize the world economy [153]. Employees will be guaranteed long term jobs which will improve their standard of living. Siting a project in an area where the rate of unemployment is high will help improve the standard of living of the community. It will

therefore serve as poverty alleviation programme. The poverty level will also reduce drastically once more jobs are created. Work environment will be safer due to the implementation of the technology once project participants agree to join health and safety procedures.

#### **4.3 Economic contribution of CCS technology**

Producing natural resources can support the energy sector and improve the economy of most countries especially developing countries [154]. Application of CCS on fossil related projects will significantly improve the climate change of the country where the project is installed. The energy that is generated from such advanced related projects is usually clean [155]. The cleaner the energy, the more attractive they become on the energy market. Incentives from energy systems with CCS can be made higher compared to that of projects without CCS. This will enhance the advancement of CCS related projects further and also boost the economy of the country. From literature, an explanation is given that integration of CCS on energy related projects will make it attractive to the energy market hence increasing the amount of investment into the sector. The carbon foot prints from fossil product is reduced as a result of the integration of CCS technology to the system. This is one key contribution of the application of CCS that convinces investors to invest money into this novel technology. In summary CCS technology can be described as a vital climate mitigation tool and also an approach of meeting the world energy demand [156].

#### **5. Current status and policies of CSS technology around the world**

Most policies formulated in the implementation of CCS on fossil related projects are centered around the transportation and storage of the CO<sub>2</sub>. The European Union till date has the most relations on CCS technology [157]. Conventions on CCS technology are categorized into two main sections; the first one considers CCS an option aiding in the reduction of emissions (Nations Framework Convention on Climate Change, Kyoto Protocol); whereas the second one

concerns regulations on oceanic sequestration for captured CO<sub>2</sub> (United Nations Convention on the Law of the Sea, London Convention).

### 5.1.1 USA and Australia

Research activities in CCS have surged up over the last decades in the US due to government plan for providing 2.4 billion dollars to support CCS projects and investigations. According to the American Clean Energy and Security Act, implementation of CCS should provide around 26% emission reduction from industries [158]. The geological salt water reservoir was developed from the CCS state league. The CCS flagship project was also developed in Australia and this provided two billion dollars for research into CCS. This further led to the formation of the global CCS institute with the main objective of advancing the development of CCS technology [159].

### 5.1.2 EU

The European Union (EU) has strong commitment to combat climate change and for this it exhibits commitment towards the advancement of CCS technology, as shown in Table 7. CCS is considered on the high priority development goals by the EU but some of the member states are still struggling to keep up with targets and standards set by the EU. The EU has a legal framework on the development of CCS [160]. The European Commission (EC) considers CCS as the possible solution to emission released from fossil fuel related projects and this according to the commission, is the future of the energy industry in terms of energy security and climate change challenges. In 2008, EC implemented the Directive on the Geological Storage of CO<sub>2</sub>. This eventually became the legal framework for carbon dioxide geological storage. The policy stipulated that new power stations must support the capture of CO<sub>2</sub> as well as all power stations that run on coal being retrofitted with CCS by 2020. There are other directives issued by the EC like the requirement for CCS equipment (Directive 85/337/EC), requirement for storage sites (Directive 2001/60/EC, Directive 2004/35/EC). The EC in 2012 amended the European Union

Emission Trading Scheme to include CCS technologies. Some of these amendments were the role of CCS technology, explanation of auction and quota and accommodate new investment in CCS R&D. The Emerging policy documents for CCS demonstration in developing countries was also developed in 2009. Some incentive policies rolled out by the EU include reducing operational expenditure for CCS [161].

The EU has many policies related to CCS technology but these policies face some challenges. CCS technology is currently yet to attain full commercialization hence overcoming these challenges relating to some of the policies is difficult. Management of storage sites in terms of risk assessment still poses a challenge to the EU. The policy on the geological storage of CO<sub>2</sub> explains that the license of any entity will be revoked whenever there is leakage of CO<sub>2</sub>, but the policy does not indicate measures put in place during the process of the leakage occurring. Strategies to determine responsibility for an entity's negligence in the event of any leakage is yet to be determined and this has a serious effect on storage sites [162]. Challenges relating to storage sites indicates that the capture of carbon dioxide, transportation and storage cannot be guaranteed hence reducing the potential of CCS becoming commercialized.

## **6. Challenges and future prospects of CCS technology**

China has laid down target to reduce CO<sub>2</sub> emissions by 40% to 45% in 2050. A paradigm shift of the economy and selecting efficient emission reduction approach will make this a reality and with coal being one of the main sources of energy generation, integration of CCS into these projects will reduce the overall emissions from their energy sector [163].

CCS technology is built to capture emissions from fossil related projects. It has the capacity of absorbing 85% – 95% of CO<sub>2</sub> emissions. It implies that if more than 50 % of thermal power has CCS integrated into the system, the power sector can reduce nearly a billion to of CO<sub>2</sub>. The

application of CCS will support the dependency of fossil fuel as a source of energy generation without toxic emissions into the atmosphere.

However, the application of CCS in the energy industry has some notable limitations as CCS involves higher energy consumption by the project in terms of capturing the CO<sub>2</sub> as well as compression of the gas. This may reduce the energy conversion efficiency from 48% to 36% once the CCS is installed. For example, if 50 % of domestic thermal power has CCS integrated in them, the energy sector will utilize extra 65.27 – 261.10 million tons of standard coal [164]. This contravenes the energy conservation and emission policy. CCS is described as a period constrained emission reduction option. CCS are primarily designed for fossil fuel emission reduction only but other alternative energy generation mediums are developed to reduce emissions and aid in the depletion of fossil fuel reserves. This according to the research community makes alternative energy generation more attractive in terms of energy generation compared to CCS [165].

The high cost of carbon capture technology poses a challenge towards the advancement of the technology. Fig.10 shows the cost of electricity produced from the different types of technologies under investigation. The left region of the figure explains current technologies with zero carbon options. The mid region of Fig.10 depicts emerging technologies and the right region shows the cost of innovative systems. The dotted line shows near term electricity prices. The prices for all near zero carbon technologies are very expensive compared to current electricity cost [165].

CCS helps in reducing the total cost for combating climate change by nearly 30% as in the absence of any carbon capture technology, more expensive approach will be needed to help in the reduction of carbon dioxide during energy generation [162]. The total cost of the CSS technology is determined by the capturing costs as it accounts for 75% of the total cost. It also

increases the prices of electricity between 30 - 90% [134]. The main reason for the increase is because there is an energy penalty related with capture and compression of CO<sub>2</sub> to make it ready for transport and injection. It should be noted that the cost of electricity prices from an old plant retrofitted with CCS technology is cheaper than that of a new plant with CCS.

### 6.1 Gasification challenges

The capture of CO<sub>2</sub> from a newly built gasification plant is cheaper than that of a coal plant with post combustion capture [135]. Below are some challenges on gasification.

- a) The operational period for an IGCC plant using a gasifier and power production facilities must function at the same time. The gasification and power production are old technologies but integrating them remains a challenge for utilities.
- b) The cost of building the facilities for this technology is also a major issue. IGCC in the absence of any carbon capture technology is expensive to build compared to pulverized coal without any carbon capture and storage technology [163]. Due to the challenge in securing the mandate, market price as well as the regulatory framework, recent plants are often designed without any carbon capture and storage.
- c) The cost of IGCC plants is also dependent on the altitude and coal type. The higher the altitude, the more expensive to operate

### 6.2 Post Combustion Capture Challenges.

The main challenges of this CCS type are the high cost and high energy penalties. The electricity produced from traditional coal power plants with post combustion capture is expensive. The levelized cost of electricity is likely to increase to 80% with this type of technology.

- a) Retrofit cost for existing plants will be site specific but could approach one half the cost of building a new coal power plant without post combustion capture.



- b) There is also high efficiency penalty on coal power plants. The energy needed to heat today's post combustion capture solvents and then compress carbon dioxide from the exhaust stack to pipeline pressure can reduce the output of an existing plant by 30%. These inefficiencies lead to more coal being used for an equivalent amount of electricity sold and this results in increased plants cooling requirements.
- c) Incremental improvements in the efficiency and costs of PCC processes are likely following initial commercial-scale demonstrations. Technology developers to date have had little incentive to optimize solvents and process configurations [164].

### 6.3 Geologic Storage Challenges

Scaling up the technology to address climate change remains a major issue with regards to sequestration. Even though the enhanced oil recovery has been used in recent times on large scale, there are still few sites where large amounts of carbon dioxide have been injected into geologic brine formations [137,138]. Larger field demonstration projects are needed worldwide. Science and industry experience strongly indicate that sequestration is safe when practiced in an appropriate site. However, managing hundreds of sources injecting into a single sedimentary basin requires a high level of knowledge sharing and project coordination, as well as research and development support. Monitoring, permitting and long-term care programs must also be developed so that commercial and public sequestration sites can be developed and environmental protection assured. A robust public policy framework must support the development of these institutions [138-141].

## 7. Conclusion

This paper reviewed the main technologies for carbon capture and storage (CCS) and indicated future prospects of them. Various separation techniques of CO<sub>2</sub> including physical, membrane and Cryogenic were presented. The three main methods used in CCS including pre combustion,

post combustion and oxy combustion were discussed. It was found that the post combustion and the pre combustion are the most accepted methods for CCS technology commercially. These two methods are also preferred for gas stream purification for various industrial purposes. They can also be used to absorb carbon dioxide from flue gases of small scale power plant installations but this has not been commercialized. The oxy combustion method of carbon dioxide capture is still going through developmental stages but gradually making predominant strides in the CCS industry. The merit and demerit of all CCS technologies were presented. The high cost of CCS technology is the major challenge that cut across all the three types of the technology. Carbon dioxide capture requires large energy and this is one of the reasons for the high cost of technology. For example, almost 15 – 30% energy is required per net kWh for new power plants powered by fossil commodities. This is the case for most combustion power plants where there is high energy penalty during the carbon dioxide capture and this increases the overall cost of the system. It is worth to mention that renovating carbon dioxide system for existing power plants is more expensive compared to new plants in terms of kWh. Therefore, CCS technology still requires significant developments to reduce the total cost of the technology in order to reach the market at affordable prices.

## 8. Reference

- [1]. Tabbi Wilberforce, F. N. khatib, O. Emmanuel, O. Ijeaodola, A. Abdulrahman, Ahmed AL Makky A. Baroutaji, A.G. Olabi. Experimental Study Of Operational Parameters On The Performance Of PEMFCS in Dead End Mode. Proceedings of SEEP2017, 27-30 June 2017, Bled Slovenia.
- [2]. Tabbi Wilberforce, F. N. Khatib, Ahmed Al Makky, A. Baroutaji, A.G. Olabi Characterisation Of Proton Exchange Membrane Fuel Cell Through Design Of Experiment (DOE). Proceedings of SEEP2017, 27-30 June 2017, Bled, Slovenia
- [3] T. Wilberforce, A. Alaswad, J. Mooney and A. G. Olabi, Hydrogen Production for Solar Energy Storage. A Proposed Design Investigation, Proceedings of the 8<sup>th</sup> International

Conference on sustainable Energy and Environmental Protection. ISBN: 978-1-903978-52-8. 2015.

[4]. T. Wilberforce, A. Al Makky, A. Baroutaji, R. Sambhi and A.G Olabi, Optimization of bipolar plate through computational fluid dynamics simulation and modelling using nickel open pore cellular foam material, International conference on renewable energies and power quality (ICREPPQ'17), ISSN 2171-038X, No 15 April 2017.

[5]. Tabbi Wilberforce, Zaki, El-Hassan, F.N. Khatib, A. Al Makyy, A. Baroutaji, J. G. Carton and A. G. Olabi. Developments of electric cars and fuel cell hydrogen electric cars. DOI: 10.1016/j.ijhydene.2017.07.054

[6]. T. Wilberforce, Z. El-Hassan, F.N. Khatib, A. Al Makyy, A. Baroutaji, J. G. Carton and A. G. Olabi, Modelling and Simulation of Proton Exchange Membrane Fuel cell with Serpentine bipolar plate using MATLAB, International journal of hydrogen, 2017. DOI: 10.1016/j.ijhydene.2017.06.091.

[7]. T. Wilberforce, A. Al Makky, A. Baroutaji, R. Sambhi, A.G. Olabi, Computational Fluid Dynamic Simulation and modelling (CFX) of Flow Plate in PEM fuel cell using Aluminum Open Pore Cellular Foam Material, Power and Energy Conference (TPEC), IEEE, Texas. 2017. DOI: 10.1109/TPEC.2017.7868285.

[8]. Tabbi Wilberforce, A. Alaswad, A. Palumbo, A. G. Olabi, Advances in stationary and portable fuel cell applications, International Journal of Hydrogen Energy 41(37) March 2016.

[9]. Oluwatosin Ijaodola, Emmanuel Ogungbemi, Fawwad Nisar. Khatib, Tabbi Wilberforce, Mohamad Ramadan, Zaki El Hassan, James Thompson and Abdul Ghani Olabi. Evaluating the Effect of Metal Bipolar Plate Coating on the Performance of Proton Exchange Membrane Fuel Cells. Energies 2018, 11, 3203; doi:10.3390/en11113203.

[10] Candelade la Sota, Moustapha Kane, Javier Mazorra, Julio Lumbreras, Issakha Youm, Mar Viana. Intercomparison of methods to estimate black carbon emissions from cookstoves. Science of The Total Environment. Volume 595, 1 October 2017, Pages 886-893.

<https://doi.org/10.1016/j.scitotenv.2017.03.247>.

- [11] Adrianna Nogalska, Adrianna Zukowska, Ricard Garcia-Valls. Atmospheric CO<sub>2</sub> capture for the artificial photosynthetic system. *Science of The Total Environment*. Volume 621, 15 April 2018, Pages 186-192. <https://doi.org/10.1016/j.scitotenv.2017.11.248>.
- [12] You Jin Kim, Wenme iHe, Daegeun Ko, Haegeun Chung, Gayoung Yoo. Increased N<sub>2</sub>O emission by inhibited plant growth in the CO<sub>2</sub> leaked soil environment: Simulation of CO<sub>2</sub> leakage from carbon capture and storage (CCS) site. *Science of The Total Environment*. Volumes 607–608, 31 December 2017, Pages 1278-1285. <https://doi.org/10.1016/j.scitotenv.2017.07.030>.
- [13] Fengsheng Su, Chungsyng Lu, Wenfa Cnen, Hsunling Bai, Jyh Feng Hwang. Capture of CO<sub>2</sub> from flue gas via multiwalled carbon nanotubes. *Science of The Total Environment* Volume 407, Issue 8, 1 April 2009, Pages 3017-3023. <https://doi.org/10.1016/j.scitotenv.2009.01.007>.
- [14] David G.Streets, Zifeng Lu, Leonard Levin, Arnout F.H.ter Schure, Elsie M.Sunderland. Historical releases of mercury to air, land, and water from coal combustion. *Science of The Total Environment*. Volume 615, 15 February 2018, Pages 131-140. <https://doi.org/10.1016/j.scitotenv.2017.09.207>
- [15] Carlos Alonso-Moreno, Santiago García-Yuste. Environmental potential of the use of CO<sub>2</sub> from alcoholic fermentation processes. *The CO<sub>2</sub>-AFP strategy*. *Science of The Total Environment* Volume 568, 15 October 2016, Pages 319-326. <https://doi.org/10.1016/j.scitotenv.2016.05.220>.
- [16] Rafael López, M. Jesús Díaz, José A.González-Pérez. Extra CO<sub>2</sub> sequestration following reutilization of biomass ash. *Science of The Total Environment*. Volume 625, 1 June 2018, Pages 1013-1020. <https://doi.org/10.1016/j.scitotenv.2017.12.263>.

- [17] Claire Coutris, Ailbhe L.Macken, Andrew R.Collins, Naouale El Yamani, Steven J.Brooks. Marine ecotoxicity of nitramines, transformation products of amine-based carbon capture technology. *Science of The Total Environment*. Volumes 527–528, 15 September 2015, Pages 211-219. <https://doi.org/10.1016/j.scitotenv.2015.04.119>
- [18] D.K.Benbi. Carbon footprint and agricultural sustainability nexus in an intensively cultivated region of Indo-Gangetic Plains. *Science of The Total Environment*. Volume 644, 10 December 2018, Pages 611-623. <https://doi.org/10.1016/j.scitotenv.2018.07.018>.
- [19] Romano MC, Chiesa P, Lozza G. Pre-combustion CO<sub>2</sub> capture from natural gas power plants, with ATR and MDEA processes. *International Journal of Greenhouse Gas Control* 2010;4(5):785-97.
- [20] Martin CF, Stockel E, Clowes R, Adams DJ, Cooper AI, Pis JJ, Rubiera F, Pevida C. Hyper cross linked organic polymer networks as potential adsorbents for pre-combustion CO<sub>2</sub> capture. *Journal of Materials Chemistry* 2011;21(14):5475-83.
- [21] Schell J, Casas N, Blom R, Spjelkavik AI, Andersen A, Cavka JH, Mazzotti M. MCM-41, MOF and UiO - 67/MCM-41 adsorbents for pre-combustion CO<sub>2</sub> capture by psa: adsorption equilibria. *Adsorption* 2012;18(3):213-27.
- [22] Casas N, Schell J, Joss L, Mazzotti M. A parametric study of a PSA process for pre-combustion CO<sub>2</sub> capture. *Separation and Purification Technology* 2013;104:183-92.
- [23] Jiang G, Huang Q, Kenarsari SD, Hu X, Russell AG, Fan M, Shen X. A new mesoporous amine-TiO<sub>2</sub> based pre-combustion CO<sub>2</sub> capture technology,. *Applied Energy* 2015;147:214-23.
- [24] Kang Z, Peng Y, Hu Z, Qian Y, Chi C, Yeo LY, Tee L, Zhao D. Mixed matrix membranes composed of two dimensional metal - organic framework nanosheets for pre-combustion CO<sub>2</sub>

capture: a relationship study of filler morphology versus membrane performance. *Journal of Materials Chemistry A* 2015;3(41): 20801-10.

[25] Park SH, Lee SJ, Lee JW, Chun SN, Lee JB. The quantitative evaluation of two-stage pre-combustion CO<sub>2</sub> capture processes using the physical solvents with various design parameters. *Energy* 2015;81:47-55.

[26] Dai Z, Deng L. Membrane absorption using ionic liquid for pre-combustion CO<sub>2</sub> capture at elevated pressure and temperature. *International Journal of Greenhouse Gas Control* 2016;54:59-69.

[27] Zheng J, Zhang P, Linga P. Semiclathrate hydrate process for pre-combustion capture of CO<sub>2</sub> at near ambient temperatures. *Applied Energy* 2016;194:267-78.

[28] Angela D.Lueking, Milton W.Cole. Energy and mass balances related to climate change and remediation. *Science of The Total Environment*. Volumes 590–591, 15 July 2017, Pages 416-429. <https://doi.org/10.1016/j.scitotenv.2016.12.101>

[29] Amanda Alonso, J.Moral -Vico, Ahmad Abo Markeb, Martí Busquets-Fité, Dimitrio Komilis, Victor Puentes, Antoni Sánchez, Xavier Font. Critical review of existing nanomaterial adsorbents to capture carbon dioxide and methane. *Science of the Total Environment*. Volume 595, 1 October, 2017. Pages 51 – 62.

[30] Zili Zhang, Qinda Zeng, Runlong Hao, Hong zhou He, Fan Yang, Xing zhou Mao, Yumin Mao, Peng Zhao. Combustion behavior, emission characteristics of SO<sub>2</sub>, SO<sub>3</sub> and NO, and in situ control of SO<sub>2</sub> and NO during the co-combustion of anthracite and dried sawdust sludge. *Science of The Total Environment*. Volume 646, 1 January 2019, Pages 716-726. <https://doi.org/10.1016/j.scitotenv.2018.07.286>

[31] Smith K, Anderson CJ, Tao W, Endo K, Mumford KA, Kentish SE, Qader A, Hooper B, Stevens GW. Precombustion capture of CO<sub>2</sub> results from solvent absorption pilot plant trials using 30 wt% potassium carbonate and boric acid promoted potassium carbonate solvent.

International Journal of Greenhouse Gas Control 2012;10:64-73.

[32] Said A, Eloneva S, Fogelholm CJ, Fagerlund J, Nduagu E, Zevenhoven R. Integrated carbon capture and storage for an oxyfuel combustion process by using carbonation of Mg(OH)<sub>2</sub> produced from serpentinite rock. Energy Procedia 2011;4(1):2839-46.

[33] Stanger R, Wall T. Sulphur impacts during pulverised coal combustion in oxy-fuel technology for carbon capture and storage. Progress in Energy and Combustion Science 2011;37(1):69-88.

[34] Vellini M, Gambini M. CO<sub>2</sub> capture in advanced power plants fed by coal and equipped with OTM. International Journal of Greenhouse Gas Control 2015;36:144-52.

[35] Falkenstein-Smith R, Zeng P, Ahn J. Investigation of oxygen transport membrane reactors for oxy-fuel combustion and carbon capture purposes. Proceedings of the Combustion Institute 2017;36(3):3969-76.

[36] Metz B, Davidson O, de Coninck HC, Loos M, Meyer LA, editors. IPCC special report on carbon dioxide capture and storage. Prepared by working group III of the intergovernmental panel on climate change. New York: Cambridge University Press; 2005.

[37] National Research Council. America's climate choices: limiting the magnitude of future climate change. Washington: National Academies Press; 2010.

[38] Solomon S, Qin D, Manning M, Chen Z, Marquis M, Averyt KB, et al., editors. Climate change 2007: the physical science basis. Contribution of working group I to the fourth

assessment report of the intergovernmental panel on climate change. New York: Cambridge University Press; 2007.

[39] Edmonds J. The potential role of CCS in climate stabilization, Proc. 9<sup>th</sup> International Conference on Greenhouse Gas Control Technologies. Washington, 2008.

[40] Metz B, Davidson OR, Bosch PR, Dave R, Meyers LA, editors. Climate change 2007: mitigation. Contribution of working group III to the fourth assessment report of the intergovernmental panel on climate change. New York: Cambridge University Press; 2007.

[41] Rao AB, Rubin ES, Berkenpas MB. An integrated modeling framework for carbon management technologies: volume 1 - technical documentation: amine-based CO<sub>2</sub> capture and storage systems for fossil fuel power plant. Pittsburgh (PA): U.S. Department of Energy, National Energy Technology Laboratory; 2004.

[42] Barchas R. The Kerr-McGee/ABB Lummus Crest technology for the recovery of CO<sub>2</sub> from stack gases. Energy Convers Manage 1992;33:333-40

[43] Edward S. Rubin, Hari Mantripragada, Aaron Marks, Peter Versteeg, John Kitchin. The outlook for improved carbon capture technology. Progress in Energy and Combustion Science 38 (2012) 630-671.

[44] Wappel D, Gronald G, Kalb R, Draxler J. Ionic liquids for post-combustion CO<sub>2</sub> absorption. International Journal of Greenhouse Gas Control 2010;4(3):486-94.

[45] Savile CK, Lalonde JJ. Biotechnology for the acceleration of carbon dioxide capture and sequestration. Current Opinion in Biotechnology 2011;22(6):818-23.



- [46] Fauth DJ, Gray ML, Pennline HW, Krutka HM, Sjostrom S, Ault AM. Investigation of porous silica supported mixed-amine sorbents for post-combustion CO<sub>2</sub> capture. *Energy and Fuels* 2012;26(4):2483-96.
- [47] Scholes CA, Ho MT, Wiley DE, Stevens GW, Kentish SE. Cost competitive membrane - cryogenic post combustion carbon capture. *International Journal of Greenhouse Gas Control* 2013;17:341-8.
- [48] Zhang Z, Yan Y, Zhang L, Chen Y, Ju S. CFD investigation of CO<sub>2</sub> capture by methyldiethanolamine and 2- (1-piperazinyl)-ethylamine in membranes: Part B. Effect of membrane properties. *Journal of Natural Gas Science and Engineering* 2014;19:311-6.
- [49] Jayakumar A, Gomez A, Mahinpey N. Post-combustion CO<sub>2</sub> capture using solid K<sub>2</sub>CO<sub>3</sub>: discovering the carbonation reaction mechanism. *Applied Energy* 2016;179:531-43.
- [50] Wang M, Yao L, Wang J, Zhang Z, Qiao W, Long D, Ling L. Adsorption and regeneration study of polyethylenimine-impregnated millimeter-sized mesoporous carbon spheres for post-combustion CO<sub>2</sub> capture. *Applied Energy* 2016;168:282-90.
- [51] Nwaoha C, Supap T, Idem R, Saiwan C, Tontiwachwuthikul P, AL-Marri MJ, Benamor A. Advancement and new perspectives of using formulated reactive amine blends for post combustion carbon dioxide (CO<sub>2</sub>) capture technologies. *Petroleum* 2017;3(1):10-36.
- [52] Wahby A, Silvestre-Albero J, Sepu lveda-Escribano A, Rodri guez-Reinoso F. CO<sub>2</sub> adsorption on carbon molecular sieves. *Microporous and Mesoporous Materials* 2012;164(4):280-7.

- [53] Said A, Eloneva S, Fogelholm CJ, Fagerlund J, Nduagu E, Zevenhoven R. Integrated carbon capture and storage for an oxyfuel combustion process by using carbonation of  $Mg(OH)_2$  produced from serpentinite rock. *Energy Procedia* 2011;4(1):2839-46
- [54] Stanger R, Wall T. Sulphur impacts during pulverised coal combustion in oxy-fuel technology for carbon capture and storage. *Progress in Energy and Combustion Science* 2011;37(1):69-88.
- [55] Vellini M, Gambini M.  $CO_2$  capture in advanced power plants fed by coal and equipped with OTM. *International Journal of Greenhouse Gas Control* 2015;36:144-52.
- [56] Falkenstein-Smith R, Zeng P, Ahn J. Investigation of oxygen transport membrane reactors for oxy-fuel combustion and carbon capture purposes. *Proceedings of the Combustion Institute* 2017;36(3):3969-76.
- [57] Agarwal A, Biegler LT, Zitney SE. A superstructure-based optimal synthesis of PSA cycles for postcombustion  $CO_2$  capture. *AIChE Journal* 2010;56(7):1813-28.
- [58] Wappel D, Gronald G, Kalb R, Draxler J. Ionic liquids for post-combustion  $CO_2$  absorption. *International Journal of Greenhouse Gas Control* 2010;4(3):486-94.
- [59] Savile CK, Lalonde JJ. Biotechnology for the acceleration of carbon dioxide capture and sequestration. *Current Opinion in Biotechnology* 2011;22(6):818-23.
- [60] Novek EJ, Shaulsky E, Fishman ZS, Pfefferle LD, Elimelech M: Low-temperature carbon capture using aqueous ammonia and organic solvents. *Environ. Sci. Technol. Lett.* 2016, 3:291-296 <http://dx.doi.org/10.1021/acs.estlett.6b00253>.
- [61] Rochelle GT: Thermal degradation of amines for  $CO_2$  capture. *Curr. Opin. Chem. Eng.* 2012, 1:183-190 <http://dx.doi.org/10.1016/j.coche.2012.02.004>.

- [62] Ampomah W, Balch RS, Grigg RB, McPherson B, Will RA, Lee SY, Dai Z, Pan F: Co-optimization of CO<sub>2</sub>-EOR and storage processes in mature oil reservoirs. *Greenh. Gas Sci. Technol.* 2017, 7:128-142 <http://dx.doi.org/10.1002/10.1002/ghg.1618>.
- [63] Idem R, Wilson M, Tontiwachwuthikul P, Chakma A, Veawab A, Aroonwilas A, Gelowitz D: Pilot plant studies of the CO<sub>2</sub> capture performance of aqueous MEA and mixed MEA/MDEA solvents at the University of Regina CO<sub>2</sub> capture technology development plant and the Boundary Dam CO<sub>2</sub> capture demonstration plant. *Ind. Eng. Chem. Res.* 2006, 45:2414-2420 <http://dx.doi.org/10.1021/ie050569e>.
- [64] Leung DY, Caramanna GC, Maroto-Vaaler MM: An overview of current status of carbon dioxide capture and storage technologies. *Renew. Sustain. Energy Rev.* 2014, 39:426-443 <http://dx.doi.org/10.1016/j.rser.2014.07.093>. Reviews the state of the art of CCS chain technologies, including cost comparison for capture alternatives, lifecycle assessment leakage and monitoring.
- [65] Olajire AA: CO<sub>2</sub> capture and separation technologies for end-of-pipe applications—a review. *Energy* 2010, 35:2610-2628 <http://dx.doi.org/10.1016/j.energy.2010.02.030>.
- [66] Baker RW, Lokhandwala K: Natural gas processing with membranes: an overview. *Ind. Eng. Chem. Res.* 2008, 47:2109- 2121 <http://dx.doi.org/10.1021/ie071083w>.
- [67] Kim S, Lee YM: High performance polymer membranes for CO<sub>2</sub> separation. *Curr. Opin. Chem. Eng.* 2013, 2:238-244 <http://dx.doi.org/10.1016/j.coche.2013.03.006>.
- [68] Lock SSM, Lau KK, Ahmad F, Shariff AM: Modeling, simulation and economic analysis of CO<sub>2</sub> capture from natural gas using cocurrent, countercurrent and radial crossflow hollow fiber membrane. *Int. J. Greenh. Gas Control* 2015, 36:114-134 <http://dx.doi.org/10.1016/j.ijggc.2015.02.014>.

[69] Grasa GS, Abanades JC: CO<sub>2</sub> capture capacity of CaO in long series of carbonation/calcination cycles. *Ind. Eng. Chem. Res.* 2006, 45:8846-8851  
<http://dx.doi.org/10.1021/ie0606946>

[70] Hanak DP, Anthony EJ, Manovic V: A review of developments in pilot-plant testing and modelling of calcium looping process for CO<sub>2</sub> capture from power generation systems. *Energy Environ. Sci.* 2015, 8:2199-2249 <http://dx.doi.org/10.1039/c5ee01228g>.

[71] Dunstan MT, Jain A, Liu W, Ong SP, Liu T, Lee J, Persson KA, Scott SA, Dennis JS, Grey SP: Large scale computational screening and experimental discovery of novel materials for high temperature CO<sub>2</sub> capture. *Energy Environ. Sci.* 2016, 9:1346-1360  
<http://dx.doi.org/10.1039/c5ee03253a>

[72] Dong X, Jin W: Mixed conducting ceramic membranes for high efficiency power generation with CO<sub>2</sub> capture. *Curr. Opin. Chem. Eng.* 2012, 1:163-170 <http://dx.doi.org/10.1016/j.coche.2012.03.003>.

[73] Luo S, Chen S, Chen S, Zhuang L, Ma N, Xu T, Li Q, Hou X: Preparation and characterization of amine-functionalized sugarcane bagasse for CO<sub>2</sub> capture. *J. Environ. Manage.* 2016, 168:142-148 <http://dx.doi.org/10.1016/j.jenvman.2015.09.033>.

[74] Gervasi J, Dubois L, Thomas D: Screening tests of new hybrid solvents for the post-combustion CO<sub>2</sub> capture process by chemical absorption. *Energy Procedia* 2014, 63:1854-1862  
<http://dx.doi.org/10.1016/j.egypro.2014.11.193>.

[75] Park Y, Lin KYA, Park AHA, Petit C: Recent advances in anhydrous solvents for CO<sub>2</sub> capture: ionic liquids, switchable solvents, and nanoparticle organic hybrid materials. *Front. Energy Res.* 2015, 3:1-14 <http://dx.doi.org/10.3389/fenrg.2015.00042> Article 42.

- [76] Kim H, Lee KS: Energy analysis of an absorption-based CO<sub>2</sub> capture process. *Int. J. Greenh. Gas Control* 2017, 56:250-260 <http://dx.doi.org/10.1016/j.ijggc.2016.12.002>.
- [77] Bara JE, Camper DE, Gin DL, Noble RD: Room-temperature ionic liquids and composite materials: platform technologies for CO<sub>2</sub> capture. *Acc. Chem. Res.* 2010, 43:152-159 <http://dx.doi.org/10.1021/ar9001747>.
- [78] Brennecke JF, Gurkan BE: Ionic liquids for CO<sub>2</sub> capture and emission reduction. *J. Phys. Chem. Lett.* 2010, 1:3459-3464 <http://dx.doi.org/10.1021/jz1014828>.
- [79] Gomez A, Briot P, Raynal L, Broutin P, Gimenez M, Soazic M, Cessat P, Saisset S: ACACIA project—development of a post-combustion CO<sub>2</sub> capture process. case of the DMXTM process. *Oil Gas Sci. Technol.* 2014, 69:1121-1129 <http://dx.doi.org/10.2516/ogst/2014035>.
- [80] Pinto DDD, Zaidy SAH, Hartono A, Svendsen HF: Evaluation of a phase change solvent for CO<sub>2</sub> capture: absorption and desorption tests. *Int. J. Greenh. Gas Control.* 2014, 28:318-327 <http://dx.doi.org/10.1016/j.ijggc.2014.07.002>.
- [81] Arshad MW, von Solms N, Thomsen K: Thermodynamic modeling of liquid–liquid phase change solvents for CO<sub>2</sub> capture. *Int. J. Greenh. Gas Control* 2016, 53:401-424 <http://dx.doi.org/10.1016/j.ijggc.2016.08.014> ISSN 1750-5836.
- [82] Shen S, Bian Y, Zhao Y: Energy-efficient CO<sub>2</sub> capture using potassium proline/ethanol solution as a phase-changing absorbent. *Int. J. Greenh. Gas Control* 2017, 56:1-11 <http://dx.doi.org/10.1016/j.ijggc.2016.11.011>.

- [83] Novek EJ, Shaulsky E, Fishman ZS, Pfefferle LD, Elimelech M: Low-temperature carbon capture using aqueous ammonia and organic solvents. *Environ. Sci. Technol. Lett.* 2016, 3:291-296 <http://dx.doi.org/10.1021/acs.estlett.6b00253>.
- [84] Du N, Park HB, Robertson GP, Dal-Cin MM, Visser T, Scoles L, Guiver MD: Polymer nanosieve membranes for CO<sub>2</sub>-capture applications. *Nat. Mater.* 2011, 10:372-375 <http://dx.doi.org/10.1038/nmat2989>.
- [85] Caro J: Are MOF membranes better in gas separation than those made of zeolites? *Curr. Opin. Chem. Eng.* 2011, 1:77-83 <http://dx.doi.org/10.1016/j.coche.2011.08.007>.
- [86] Lin Y: Metal organic framework membranes for separation applications. *Curr. Opin. Chem. Eng.* 2015, 8:21-28 <http://dx.doi.org/10.1016/j.coche.2015.01.006>.
- [87] Lin H: Integrated membrane material and process development for gas separation. *Curr. Opin. Chem. Eng.* 2014, 4:54-61 <http://dx.doi.org/10.1016/j.coche.2014.01.010>.
- [88] Ramasubramanian K, Ho WSW: Recent developments on membranes for post-combustion carbon capture. *Curr. Opin. Chem. Eng.* 2011, 1:47-54 <http://dx.doi.org/10.1016/j.coche.2011.08.002>.
- [89] Hussain A, Haq MB: A feasibility study of CO<sub>2</sub> capture from flue gas by a facilitated transport membrane. *J. Membr. Sci.* 2010, 359:140-148 <http://dx.doi.org/10.1016/j.memsci.2009.11.035>.
- [90] Sreedhar I, Vaidhiswaran R, Kamani BM, Venugopal A: Process and engineering trends in membrane based carbon capture. *Renew. Sustain. Energy Rev.* 2017, 68:659-684 <http://dx.doi.org/10.1016/j.rser.2016.10.025>.

- [91] Abu-Zahra MRM, Abbas Z, Singh P, Feron P. Carbon dioxide post-combustion capture: solvent technologies overview, status and future directions. Materials and processes for energy: communicating current research and technological developments. Badajoz (Spain): Formatex Research Center; 2013.
- [92] Global CCS Institute. Good plant design and operation for onshore carbon capture installations and onshore pipelines: a recommended practice guidance document. 1st ed. London (United Kingdom): Energy Institute (EI); 2010.
- [93] Rubin ES, Chen C, Rao AB: Cost and performance of fossil fuel power plants with CO<sub>2</sub> capture and storage. Energy Policy 2007, 35:4444-4454 <http://dx.doi.org/10.1016/j.enpol.2007.03.009>.
- [94] Global CCS Institute. Fluor's Econamine FG plus. Global CCS Institute; 2013.
- [95] Cousins A, Wardhaugh LT, Feron PHM: A survey of process flow sheet modifications for energy efficient CO<sub>2</sub> capture from flue gases using chemical absorption. Int. J. Greenh. Gas Control 2011, 5:605-619 <http://dx.doi.org/10.1016/j.ijggc.2011.01.002>.
- [90] Carter LD: Retrofitting Carbon Capture Systems on Existing Coal-fired Power Plants. A White Paper for the American Public Power Association (APPA). American Public Power Association; 2007. Available at: <https://www.uschamber.com/sites/default/files/legacy/CO2/files/DougCarterretrofitpaper2.pdf>.
- [91] Narula RG, Wen H, Himes K: Incremental cost of CO<sub>2</sub> reduction in power Plants. ASME Turbo Expo 2002: Power for Land, Sea, and Air. Volume 4: Turbo Expo 2002, Parts A and B, Amsterdam, The Netherlands, June 3–6, 2002, Conference Sponsors: International Gas Turbine Institute, ISBN: 0-7918-3609-6. [http:// dx.doi.org/10.1115/GT2002-30259](http://dx.doi.org/10.1115/GT2002-30259).

[92] IEA: Power Generation from Coal. Measuring and Reporting Efficiency Performance and CO<sub>2</sub> Emissions. International Energy Agency Coal Industry Advisory Board; 2010.

[https://www.iea.org/ciab/papers/power\\_generation\\_from\\_coal.pdf](https://www.iea.org/ciab/papers/power_generation_from_coal.pdf).

[93] Chappin EJ, Dijkema GPJ: On the impact of CO<sub>2</sub> emission-trading on power generation emissions. *Technol. Forecast. Soc. Change* 2009, 76:358-370 <http://dx.doi.org/10.1016/j.techfore.2008.08.004>.

[94] Fosbøl PL, Gaspar J, Ehlers S, Kather A, Briot P, Nienoord M, Khakharia P, Le Moullec Y, Berglihn OT, Kvamsdal H: Benchmarking and comparing first and second generation post combustion CO<sub>2</sub> capture technologies. *Energy Procedia* 2014, 63:27-44 <http://dx.doi.org/10.1016/j.egypro.2014.11.004>.

[95] Versteeg P, Rubin ES: A technical and economic assessment of ammonia-based post-combustion CO<sub>2</sub> capture at coal-fired power plants. *Int. J. Greenh. Gas Control* 2011, 5:1596-1605 <http://dx.doi.org/10.1016/j.ijggc.2011.09.006>.

[96] van der Spek M, Fernandez ES, Eldrup NH, Skagestad R, Ramirez A, Faaij A: Unravelling uncertainty and variability in early stagetechno-economic assessments of carbon capture technologies. *Int. J. Greenh. Gas Control*. 2017, 56:221-236 <http://dx.doi.org/10.1016/j.ijggc.2016.11.021>.

[97] Maitland GC: Carbon capture and storage: concluding remarks. *Faraday Discuss.* 2016, 192:581-599 <http://dx.doi.org/10.1039/C6FD00182C>.

[98] Khalilpour R, Milani D, Qadir A, Chiesa M, Abbas A: A novel process for direct solvent regeneration via solar thermal energy for carbon capture. *Renew. Energy* 2017, 104:60-75 <http://dx.doi.org/10.1016/j.renene.2016.12.001>.



- [99] Sanchez Fernandes SE, Sanchez del Rio M, Chalmers H, Khakharia P, Goetheer ELV, Gibbins J, Lucquiaud J: Operational flexibility options in power plants with integrated post-combustion capture. *Int. J. Greenh. Gas Control* 2016, 48:275- 289  
<http://dx.doi.org/10.1016/j.ijggc.2016.01.027>.
- [100] Mac Dowell N, Shah N: Optimisation of post-combustion CO<sub>2</sub> capture for flexible operation. *Energy Procedia* 2014, 63:1525- 1535 <http://dx.doi.org/10.1016/j.egypro.2014.11.162>.
- [101] Ho MT, Wiley DE: Flexible strategies to facilitate carbon capture deployment at pulverised coal power plants. *Int. J. Greenh. Gas Control* 2016, 48:290-299  
<http://dx.doi.org/10.1016/j.ijggc.2015.12.010>.
- [102] Maitland GC: Carbon capture and storage: concluding remarks. *Faraday Discuss.* 2016, 192:581-599 <http://dx.doi.org/10.1039/C6FD00182C>.
- [103] Khalilpour R, Milani D, Qadir A, Chiesa M, Abbas A: A novel process for direct solvent regeneration via solar thermal energy for carbon capture. *Renew. Energy* 2017, 104:60-75  
<http://dx.doi.org/10.1016/j.renene.2016.12.001>.
- [104] Borhani TNG, Akbari V, Afkhamipour M, Hamid MKA, Manan ZA. Comparison of equilibrium and nonequilibrium models of a tray column for post-combustion CO<sub>2</sub> capture using DEA-promoted potassium carbonate solution. *Chemical Engineering Science* 2015;122:291-8.
- [105] Borhani TNG, Akbari V, Hamid MKA, Manan ZA. Rate-based simulation and comparison of various promoters for CO<sub>2</sub> capture in industrial DEA-promoted potassium carbonate absorption unit. *Journal of Industrial and Engineering Chemistry* 2015;22:306-16.
- [106] Al-Marzouqi M, El-Naas M, Marzouk S, Abdullatif N. Modeling of chemical absorption of CO<sub>2</sub> in membrane contactors. *Separation and Purification Technology* 2008;62(3):499-506.

- [107] El-Naas MH, Al-Marzouqi M, Marzouk SA, Abdullatif N. Evaluation of the removal of CO<sub>2</sub> using membrane contactors: membrane wettability. *Journal of Membrane Science* 2010;350(1e2):410-6.
- [108] Zhang Z, Yan Y, Zhang L, Chen Y, Ran J, Pu G, Qin C. Theoretical study on CO<sub>2</sub> absorption from biogas by membrane contactors: effect of operating parameters. *Industrial and Engineering Chemistry Research* 2014; 53(36):14075-83.
- [109] Joel AS, Wang M, Ramshaw C, Oko E. Process analysis of intensified absorber for post-combustion CO<sub>2</sub> capture through modelling and simulation. *International Journal of Greenhouse Gas Control* 2014;21:91-100.
- [110] Wang M, Joel AS, Ramshaw C, Eimer D, Musa NM. Process intensification for post-combustion CO<sub>2</sub> capture with chemical absorption: a critical review. *Applied Energy* 2015;158:275-91.
- [111] Lampe M, Stavrou M, Schilling J, Sauer E, Gross J, Bardow A. Computer-aided molecular design in the continuous-molecular targeting framework using group-contribution PC-SAFT. *Computers and Chemical Engineering* 2015;81:278-87.
- [112] Zarogiannis T, Papadopoulos AI, Seferlis P. Systematic selection of amine mixtures as post-combustion CO<sub>2</sub> capture solvent candidates. *Journal of Cleaner Production* 2016;136:159-75.
- [113] Papadopoulos AI, Badr S, Chremos A, Forte E, Zarogiannis T, Seferlis P, Papadokostantakis S, Galindo A, Jackson G, Adjiman CS. Computer-aided molecular design and selection of CO<sub>2</sub> capture solvents based on thermodynamics, reactivity and sustainability. *Molecular Systems Design and Engineering* 2016;1(3): 313-34.

- [114] Matsuda H, Yamamoto H, Kurihara K, Tochigi K. Computer-aided reverse design for ionic liquids by QSPR using descriptors of group contribution type for ionic conductivities and viscosities. *Fluid Phase Equilibria* 2007;261(1):434-43.
- [115] Venkatraman V, Gupta M, Foscatto M, Svendsen HF, Jensen VR, Alsberg BK. Computer-aided molecular design of imidazole-based absorbents for CO<sub>2</sub> capture. *International Journal of Greenhouse Gas Control* 2016;49:55-63.
- [116] Chong FK, Foo DCY, Eljack FT, Atilhan M, Chemmangattuvalappil NG. Ionic liquid design for enhanced carbon dioxide capture by computer-aided molecular design approach. *Clean Technologies and Environmental Policy* 2015;17(5):1301-12.
- [117] Mac Dowell N, Galindo A, Jackson G, Adjiman C. Integrated solvent and process design for the reactive separation of CO<sub>2</sub> from flue gas. *Computer Aided Chemical Engineering* 2010;28:1231-6.
- [118] Bardow A, Steur K, Gross J. A continuous targeting approach for integrated solvent and process design based on molecular thermodynamic models. *Computer Aided Chemical Engineering* 2009;27:813-8.
- [119] Stavrou M, Lampe M, Bardow A, Gross J. Continuous molecular targeting computer-aided molecular design (CoMTeCAMD) for simultaneous process and solvent design for CO<sub>2</sub> capture. *Industrial and Engineering Chemistry Research* 2014;53(46):18029-41.
- [120] Stanger R, Wall T, Spörl R, Paneru M, Grathwohl S, Weidmann M, Scheffknecht G, McDonald D, Myöhänen K, Ritvanen J, Rahiala S, Hyppänen T, Mletzko J, Kather A, Santos S. Oxyfuel combustion for CO<sub>2</sub> capture in power plants. *International Journal of Greenhouse Gas Control* 2015;40:55-125.

- [121] Borhani TNG, Afkhamipour M, Azarpour A, Akbari V, Emadi SH, Manan ZA. Modeling study on CO<sub>2</sub> and H<sub>2</sub>S simultaneous removal using MDEA solution. *Journal of Industrial and Engineering Chemistry* 2016; 34:344-55.
- [122] Elwell LC, Grant WS. Technology options for capturing CO<sub>2</sub>. *Power* 2006;150(8):60-5.
- [123] Wang M, Lawal A, Stephenson P, Sidders J, Ramshaw C. Post-combustion CO<sub>2</sub> capture with chemical absorption: a state-of-the-art review. *Chemical Engineering Research and Design* 2011;89(9):1609-24.
- [124] Borhani TNG, Azarpour A, Akbari V, Alwi SRW, Manan ZA. CO<sub>2</sub> capture with potassium carbonate solutions: a state-of-the-art review,. *International Journal of Greenhouse Gas Control* 2015;41:142-62.
- [125] Pfaff I, Kather A. Comparative thermodynamic analysis and integration issues of CCS steam power plants based on oxy-combustion with cryogenic or membrane based air separation. *Energy Procedia* 2009;1(1): 495-502.
- [126] Adjiman CS, Galindo A, Jackson G. Molecules matter: the expanding envelope of process design. In: *Proceedings of the 8th International Conference on Foundations of Computer-Aided process design*. Amsterdam; 2014.
- [127] Bardow A, Steur K, Gross J. Continuous-molecular targeting for integrated solvent and process design. *Industrial and Engineering Chemistry Research* 2010;49(6):2834-40.
- [128] Adanez J, Abad A, Garcia-Labiano F, Gayan P, Luis F. Progress in chemical-looping combustion and reforming technologies. *Progress in Energy and Combustion Science* 2012;38(2):215-82.

- [129] Markewitz P, Bongartz R. Carbon capture technologies, carbon capture, storage and use. Springer; 2015. p. 13-45.
- [130] IEA. Tracking industrial energy efficiency and CO<sub>2</sub> emissions. Organisation for Economic Co-operation and Development 2007.
- [131] IEA. CO<sub>2</sub> capture in the cement industry. 2008.
- [132] Vatopoulos K, Tzimas E. Assessment of CO<sub>2</sub> capture technologies in cement manufacturing process. *Journal of Cleaner Production* 2012;32:251-61.
- [133] Intergovernmental Panel on Climate Change. 2005. *IPCC Special Report on Carbon Dioxide Capture and Storage: Summary for Policymakers*. [http://www.ipcc.ch/pdf/special-reports/srccs/srccs\\_summaryforpolicymakers.pdf](http://www.ipcc.ch/pdf/special-reports/srccs/srccs_summaryforpolicymakers.pdf)
- [134] Dooley, James. 2006. "Macro and Micro: The Role for Carbon Dioxide Capture and Geologic Storage in Addressing Climate Change". Presentation for the Joint Global Change Research Institute. [http://powerpoints.wri.org/ccs\\_dooley.pdf](http://powerpoints.wri.org/ccs_dooley.pdf)
- [135] Generation "with capture" estimates from MIT's *The Future of Coal* report, 2007. 30% estimate is based on an IGCC plant, from a Rubin 2006 study. 80% is based on an 81.6% increase from a subcritical PC plant from a 2002 NETL study using MEA. See tables A-3.C.3 and A-3.C.4. The full report can be found here: <http://web.mit.edu/coal/>
- [136] US DOE/NETL. 2007. Cost and Performance Baseline for Fossil Energy Plants, August 1, 2007 revision of May 2007 Report, Volume 1. [http://www.netl.doe.gov/energy-analyses/pubs/Bituminous%20Baseline\\_Final%20Report.pdf](http://www.netl.doe.gov/energy-analyses/pubs/Bituminous%20Baseline_Final%20Report.pdf)
- [137] MIT. 2007. "The Future of Coal: an Interdisciplinary MIT Study." Cambridge, MA: Massachusetts Institute of Technology. <http://web.mit.edu/coal/>

- [138] A 2004 EPRI study compared IGCC with PC and NGCC and again exhibited the higher capital costs for IGCC as compared with other power plant types
- [139] Effectiveness of amino acid salt solutions in capturing CO<sub>2</sub>: A review  
Z Zhang, Y Li, W Zhang, J Wang, R Soltanian, AG Olabi  
Renewable and Sustainable Energy Reviews 98, 179-188
- [140]. Progress in enhancement of CO<sub>2</sub> absorption by nanofluids: A mini review of mechanisms and current status. Z Zhang, J Cai, F Chen, H Li, W Zhang, W Qi  
Renewable Energy 118, 527-535
- [141] International Energy Agency "Resources to Reserves 2013; Executive Summary.
- [142] Philibert, Cedric "Carbon Capture and Storage in the CDM" Section 2.4
- [143] CDM Executive Board "CDM Sustainable Development Tool" (2012)
- [144] Owusu Phebe Asantewaa, Asumadu-Sarkodie, Samuel. A review of renewable energy sources, sustainability issues and climate change mitigation. Cogent Engineering
- [145] Samuel Asumadu Sarkodie, Aba Obrumah Crentsil, Phebe Asantewaa Owusu. Does energy consumption follow asymmetric behavior? An assessment of Ghana's energy sector dynamics. Science of The Total Environment. Volume 651, Part 2, 15 February 2019, Pages 2886-2898.
- [146]. Samuel Asumadu, Sarkodie Vladimir Strezov. A review on Environmental Kuznets Curve hypothesis using bibliometric and meta-analysis. Science of The Total Environment. Volume 649, 1 February 2019, Pages 128-145. <https://doi.org/10.1016/j.scitotenv.2018.08.276>

- [147] Samuel Asumadu Sarkodie, Vladimir Strezov. Effect of foreign direct investments, economic development and energy consumption on greenhouse gas emissions in developing countries. *Science of The Total Environment*. Volume 646, 1 January 2019, Pages 862-871.
- [148]. Samuel Asumadu Sarkodie, Vladimir Strezov. Assessment of contribution of Australia's energy production to CO<sub>2</sub> emissions and environmental degradation using statistical dynamic approach. *Science of The Total Environment*. Volume 639, 15 October 2018, Pages 888-899.
- [149]. Akhtar and Sarmah (2018). Strength improvement of recycled aggregate concrete through silicon rich char derived from organic waste, *Journal of Cleaner Production*. Volume 196, Pages 411-423.
- [150]. Akhtar and Sarmah (2018). Novel biochar-concrete composites: Manufacturing, characterization and evaluation of the mechanical properties, *Science of the Total Environment*. Volume 616-617, Pages 408-416.
- [151]. Ying Fan, Lei Zhu, Xiaobing Zhang. Analysis of Global CCS Technology, Regulations and Its Potential for Emission Reduction with Focus on China. *Advances in climate change research* 2(2): 57–66, 2011. DOI: 10.3724/SP.J.1248.2011.00057.
- [152]. Shackley, S., and P. Verma, 2008: Tackling CO<sub>2</sub> reduction in India through use of CO<sub>2</sub> capture and storage (CCS): Prospects and challenges. *Energy Policy*, 36, 3554–3561.
- [153]. Viebahn, P., J. Nitsch, M. Fishedick, et al., 2007: Comparison of carbon capture and storage with renewable energy technologies regarding structural, economic, and ecological aspects in Germany. *International Journal of Greenhouse Gas Control*, 1, 121–133.
- [154]. Zhang, J., and X. Li, 2008: *The Development of International Energy Strategy and Technology Development (in Chinese)*. Science Press, 340pp.
- [155]. Keith, D. W., M. H. Duong, and J. K. Stolaroff, 2006: Climate strategy with CO<sub>2</sub> capture from the air. *Climatic Change*, 74, 17–45.
- [156] Seevam, P. N., M. J. Downie, and P. Hopkins, 2008: Transporting the next generation of CO<sub>2</sub> for carbon capture and storage: The impact of impurities on supercritical CO<sub>2</sub> pipelines.

Proceedings of the IPC2008 7th International Pipeline Conference, International Pipeline Conference Foundation, Calgary, Alberta, Canada, Paper IPC2008–64063.

[157]. IEA (International Energy Agency), 2008: CO<sub>2</sub> capture and storage — A key carbon abatement option. OECD/IEA, 40–73.

[158]. IPCC, 2001: Climate Change 2001: Impacts, Adaptation, and Vulnerability. Contribution of Working Group II to the Third Assessment Report of the Intergovernmental Panel on Climate Change. McCarthy, J. J. et al. Eds., Cambridge University Press, 1032pp.

[159]. Coninck, H., T. Flach, P. Curnow, et al., 2008: The acceptability of CO<sub>2</sub> capture and storage (CCS) in Europe: An assessment of the key determining factors. International Journal of Greenhouse Gas Control, 3(3), 344–356.

[160]. EC (European Commission), 2006a: Green paper: A European strategy for sustainable, competitive and secure energy. COM (2006) 105 final, Commission of the European Communities.

[161] EC (European Commission), 2007c: Communication and impact assessment on sustainable power generation from fossil fuels. COM (2006) 843 final and SEC (2006) 1722, Commission of the European Communities.

[162]. EUIAB (European Union Impact Analysis Board), 2007: Impact Assessment Board opinion on impact assessment on a proposal for a directive on geological storage of carbon dioxide. SEC (2008) 56, Impact Assessment Board.

[163]. Socolow, R., S. Pacala, and J. Greenblatt, 2004: ‘WEDGES’: Early mitigation with familiar technology. The 7th International Conference on Greenhouse Gas Control Technology, Vancouver, Canada, September 5–9.

[164]. EC (European Commission), 2006b: Sustainable power generation from fossil fuels: Aiming for near-zero emissions from coal after 2020. COM (2006) 843 final, Commission of the European Communities.

[165] European Commission, 2030 climate and energy framework. [https://ec.europa.eu/clima/policies/strategies/2030\\_en](https://ec.europa.eu/clima/policies/strategies/2030_en) (Accessed: 07/11/2018)



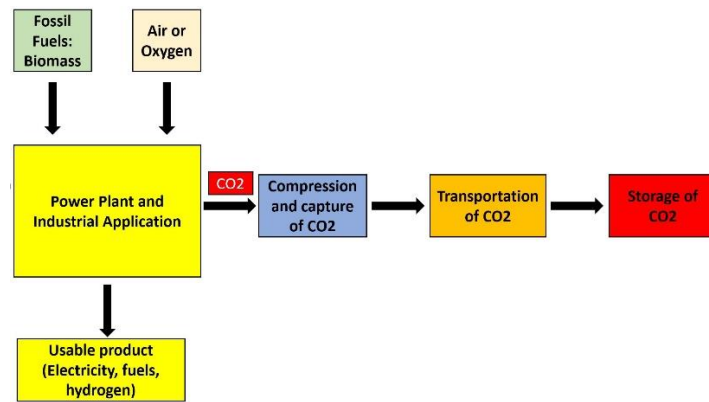


Fig. 1: Steps for carbon capture in a power plant and industrial application [13].

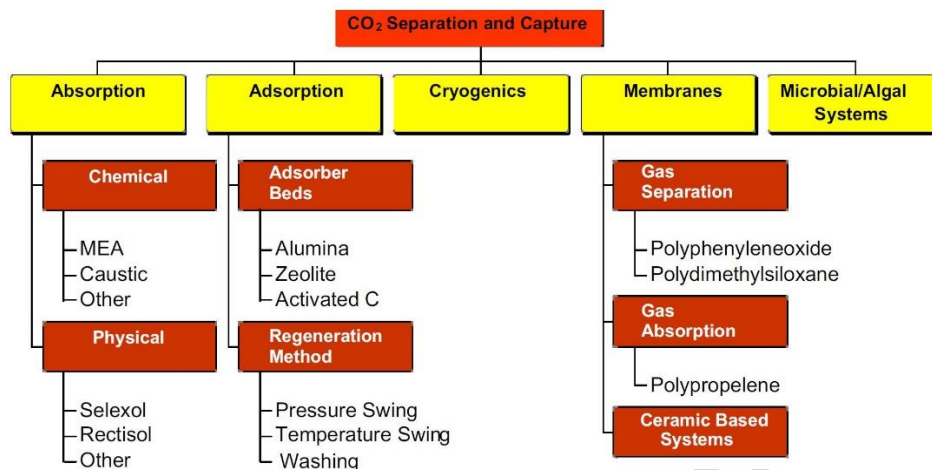


Fig. 2: Various technologies used in CCS [13].

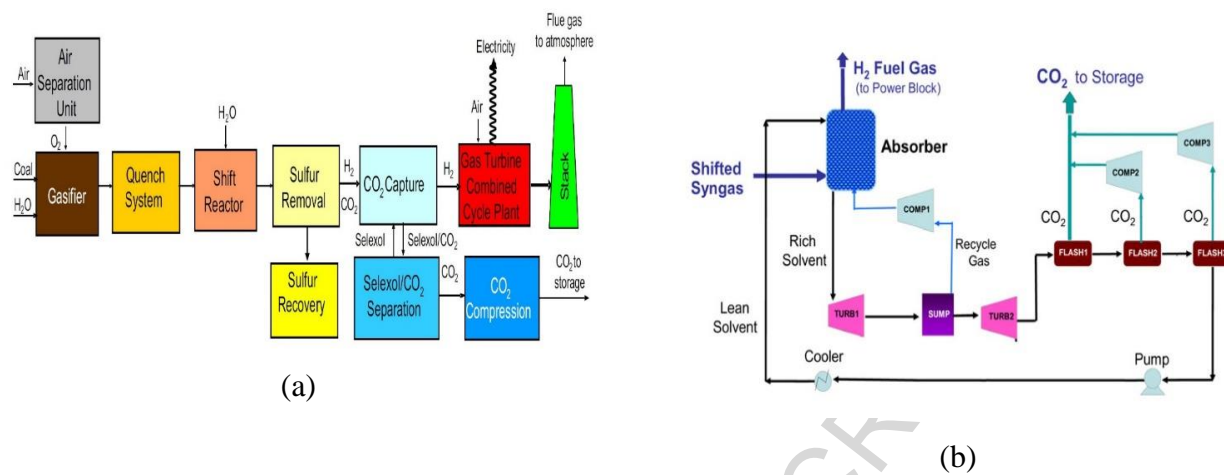


Fig. 3: A pre – combustion CCS Technology [13].

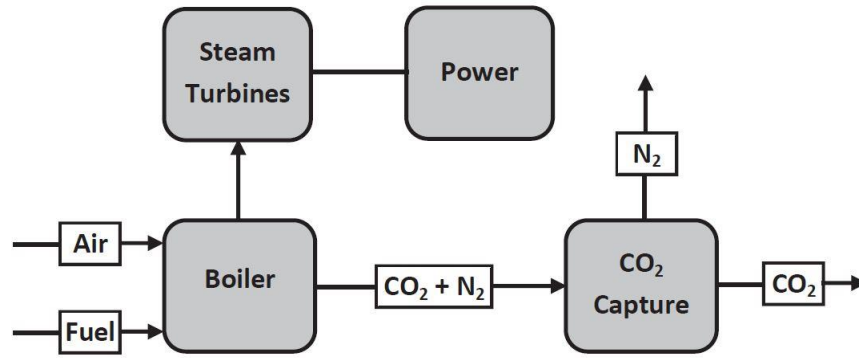


Fig. 4: A diagram showing post combustion carbon dioxide capture [36].

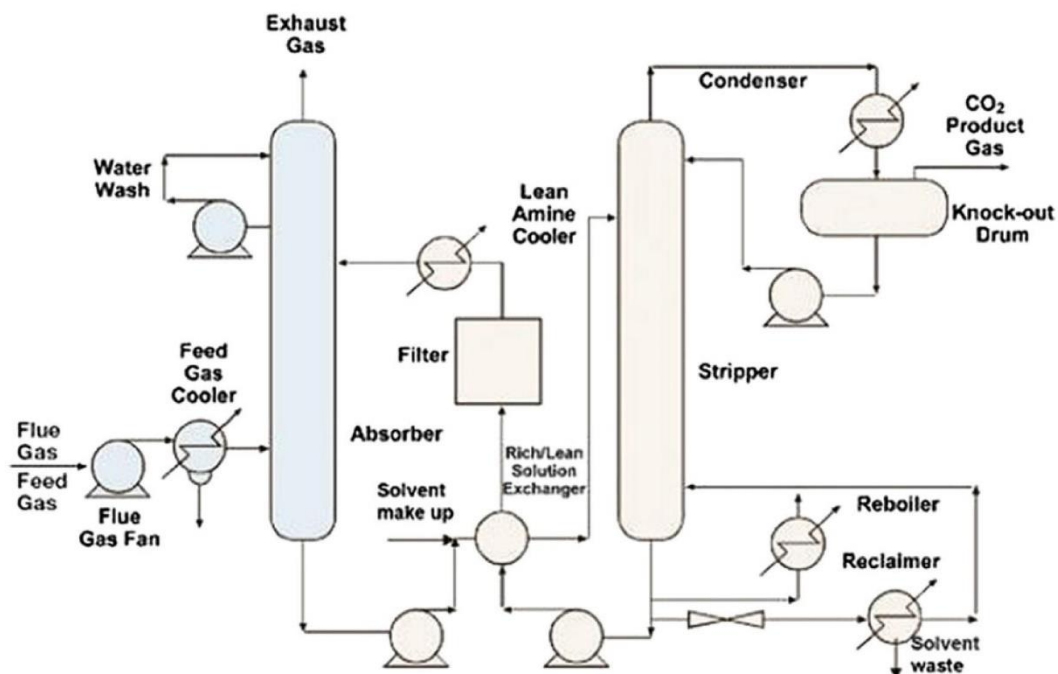


Fig. 5: Carbon dioxide capturing method using an amine type post combustion [36]

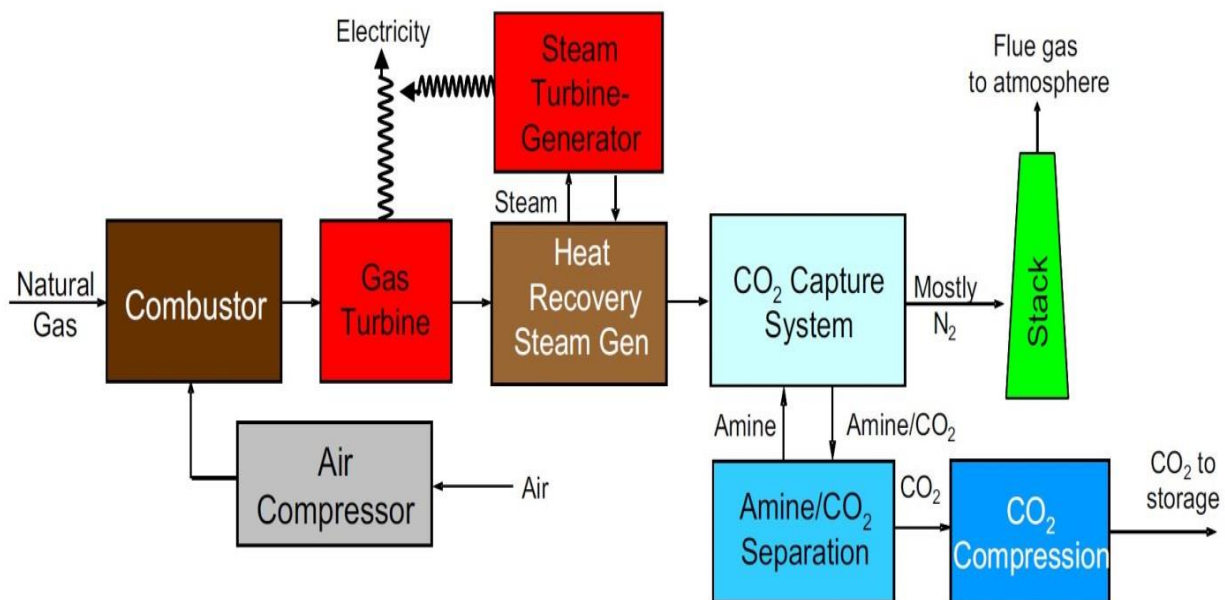


Fig. 6: Diagram showing an amine based post – combustion CO<sub>2</sub> capturing system for NGCC [36]

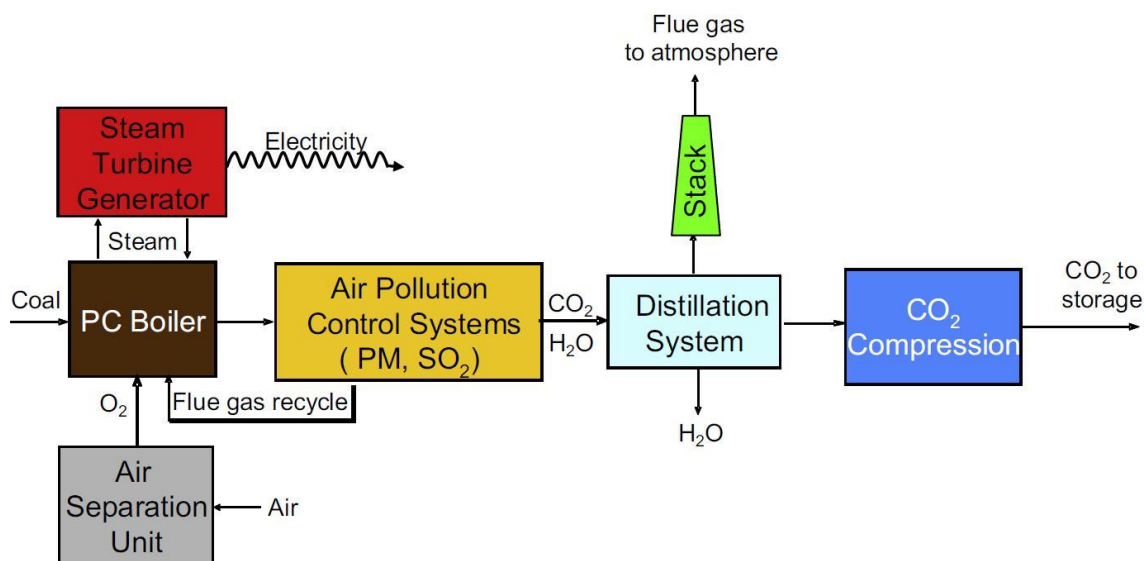


Fig. 7: Oxy – combustion technology utilized in a coal fired power plant [43].

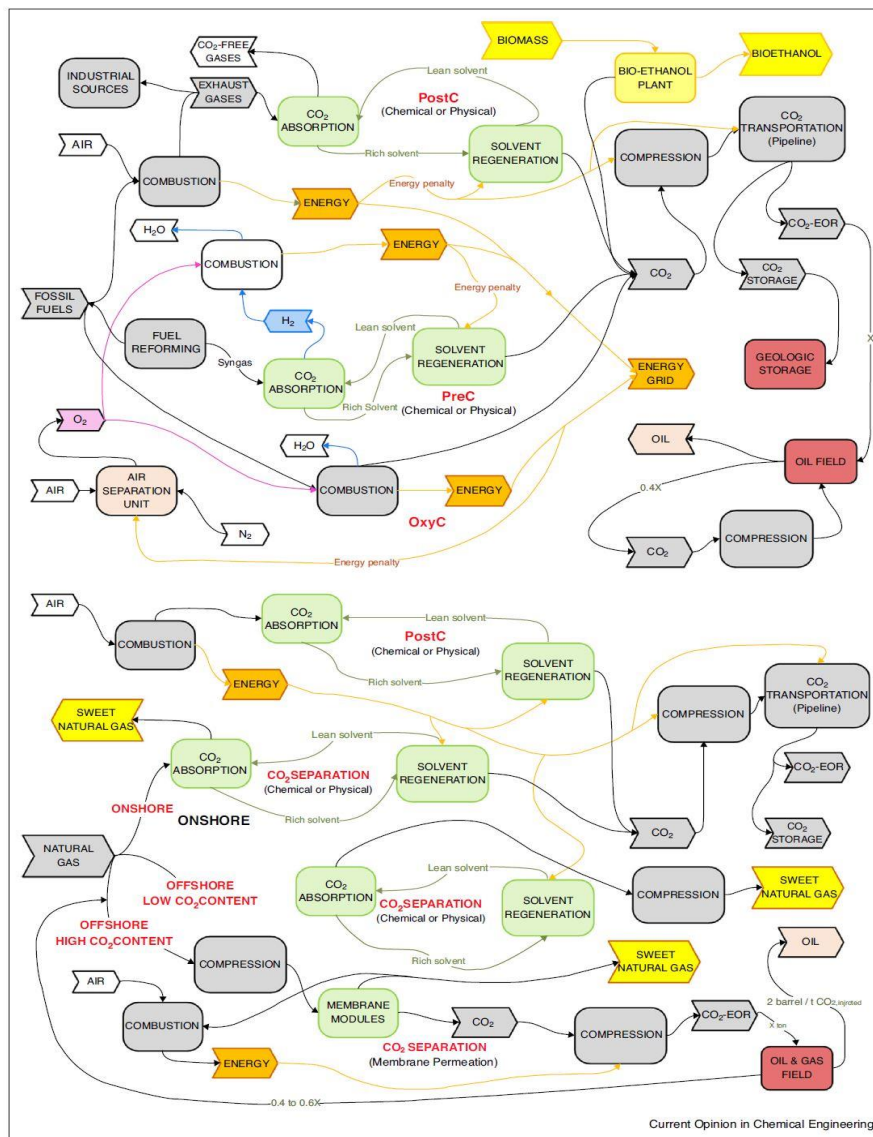


Fig. 8: Recent advancement of carbon dioxide capture routes [43]



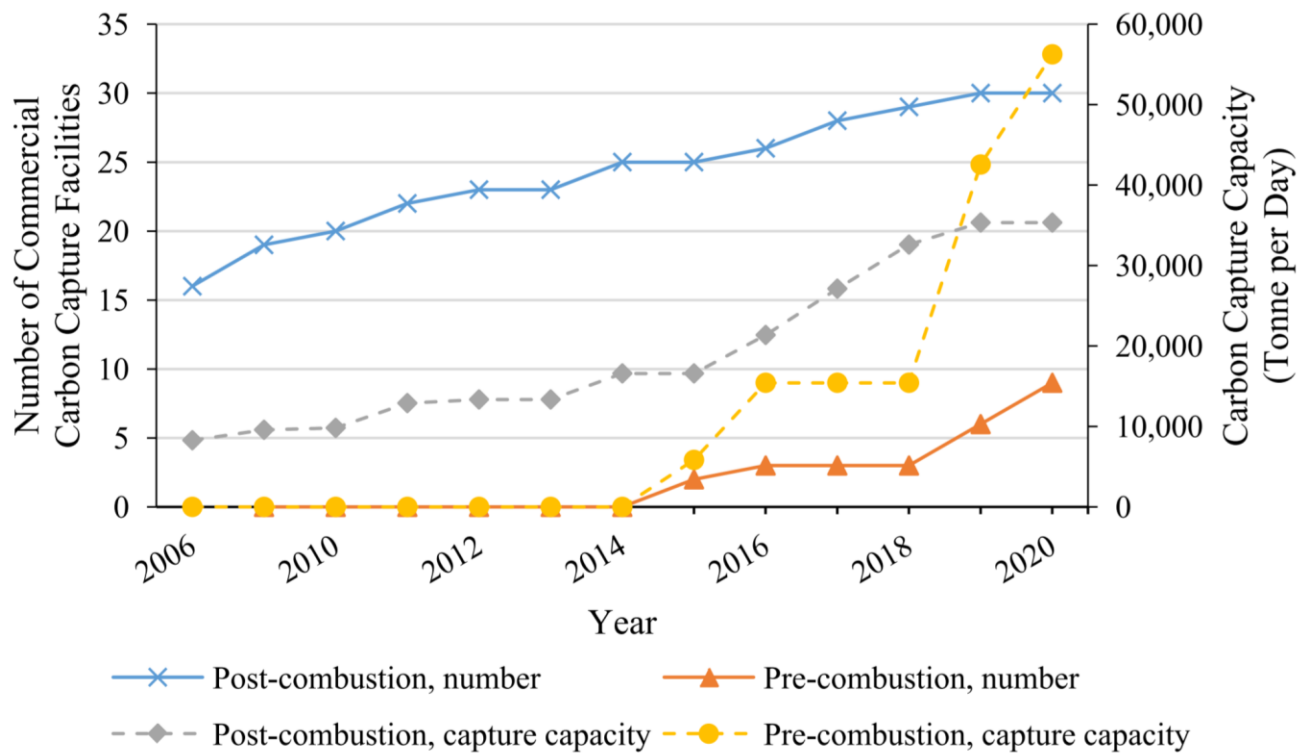


Fig. 9: Commercialized carbon capture technology across the world [44]

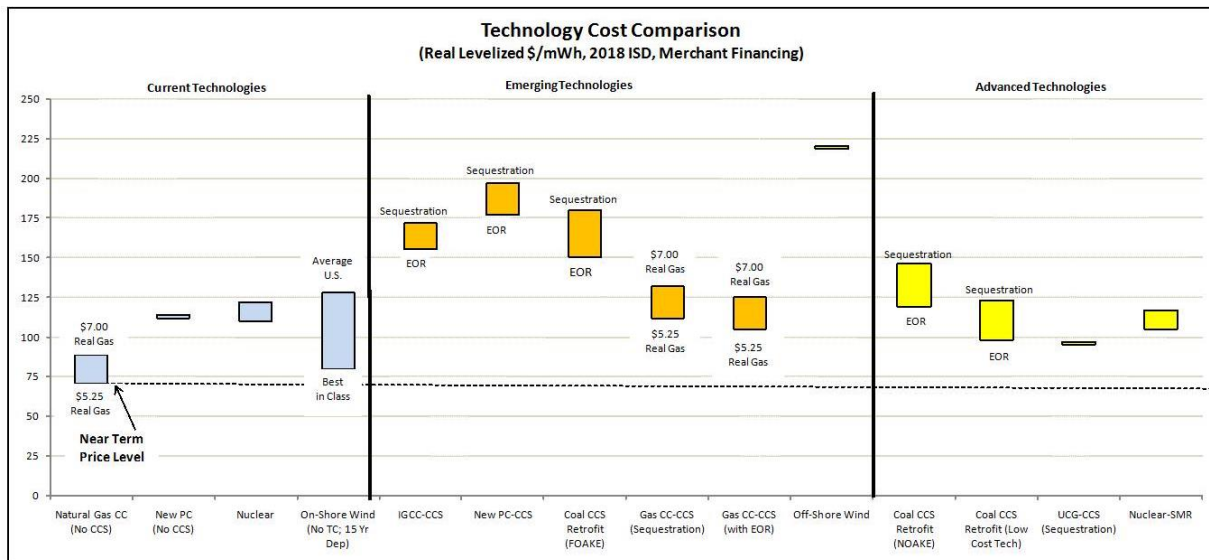


Fig. 10: Comparison for various technologies for electricity generation [133]

Table 1: Investigations being conducted on pre – combustion between 2010 - 2017

Period	Strategy	Composition of the gas	Characteristics	Ref.
2010	Absorption Chemically	Synthesis gas	Several carbon dioxide capture methods were investigated. The outcome of the investigations was compared to amine solutions.	[19]
2011	Pressure swing adsorption	Carbon dioxide	Synthesis of polymers was conducted to support the adsorption of CO <sub>2</sub> .	[20]
2012	Pressure swing adsorption	Carbon dioxide and Hydrogen	mesoporous silica MCM – 41 was used	[21]
2012	Absorption Chemically	Synthesis gas	Solvent made up of K <sub>2</sub> CO <sub>3</sub> were used for CO <sub>2</sub> sequestration from the synthesis gas	[19]
2013	Pressure swing adsorption	Carbon dioxide and Hydrogen	An extensive parametric study of a pressure swing adsorption process for carbon dioxide capture was investigated	[22]
2015	Adsorption	CO <sub>2</sub> as well as methane	Selectivity of CO <sub>2</sub> and methylene increased	[23]
2015	Membrane	Carbon dioxide and hydrogen	MOF nanosheets were investigated for carbon capture.	[24]
2015	Absorption physically	Carbon dioxide, Hydrogen sulfide, carbonyl sulfide	A two stage per combustion carbon dioxide capture process was developed.	[25]
2016	Membrane absorption	Carbon dioxide and Helium	High carbon dioxide absorption capacity	[26]
2017	gas separation by means of hydrate	Carbon dioxide and hydrogen	The CO <sub>2</sub> -H <sub>2</sub> -TBAF semiclathrate hydrate developed	[27]

Table 2: Post combustion carbon capture

Year	Methods	Gas component	Brief description	References
2010	Pressure swing adsorption	Presence of flue gas	Nearly 98% of pure carbon dioxide was obtained after a synthetic process using pressure swing adsorption.	[43]
2010	Ionic liquid	-	Solvent for the absorption of CO <sub>2</sub> according to the investigation was ionic solvent	[44]
2011	Biotechnology	-	The process of post combustion CO <sub>2</sub> capture can be made faster through usage of carbonic anhydrase according to this research work.	[45]
2012	Adsorption	Carbon dioxide and Helium	The work concluded that mixed – amine polyethyleneimine (PEI) as well as 3 – (aminopropyl)triethoxysilane are very good sorbent of carbon dioxide.	[46]
2013	Cryogenic separation of the membrane	Carbon dioxide and Oxygen	With a cost of 35 dollars per ton, the new membrane – cryogenic was described by researchers concluded as cost effective	[47]
2014	Adsorption of the membrane	Carbon dioxide and nitrogen gas	A numerical research was conducted to determine the impact of membrane as well as contractor properties on carbon dioxide capture using methyl diethanolamine and 2-1- piperazinyl- ethylamine solvents.	[48]
2016	Adsorption	Carbon dioxide and Nitrogen gas	An investigation was conducted to determine the effect of carbonization reaction mechanisms for carbon dioxide and potassium carbonate.	[49]
2016	Adsorption	Carbon dioxide and Nitrogen gas	An investigation was carried out to explore the possibility of capturing CO <sub>2</sub> using PEI – impregnated, millimeter sized mesoporous carbon spheres.	[50]
2016	Membrane absorption	Carbon dioxide and Nitrogen gas	An experimental research was performed for carbon dioxide capture and their conclusion gave a better result.	[51]
2017	Chemical absorption	Carbon dioxide and Nitrogen gas	The carbon dioxide were captured using formulated, reactive, blended amine solution.	[52]

Table 3: Recent investigation using oxy combustion technology [34]

Year	Methods	Gas component	Brief description	References
2011	-	Flue gas	Carbon dioxide capture using integrated oxy combustion and $Mg(OH)_2$ was investigated.	[52]
2011	-	Flue gas	The impact of sulfur on the capturing of $CO_2$ via a process using oxy combustion was researched.	[53]
2015	Oxygen transport membrane	Flue gas	An investigation into the characteristic efficiency of steam cycle power fitted with a carbon dioxide capture using oxy fuel combustion was thoroughly investigated.	[54]
2016	Oxygen transport membrane	Flue gas	Carbon dioxide selectivity as well as permeability of oxygen was investigated using oxygen transport membrane reactor. The membrane reactor showed high carbon dioxide absorption of 87.1%.	[55]

Table 4: Technologies for carbon dioxide capture (State of the art technology at commercialization)

Technological advancement	Merit	Obstacle and literature gap	Ref
Absorption via chemical means	It is considered a matured kind of technology for post combustion. It is also suitable for power plants fired by carbon. The efficiency for capturing the carbon dioxide is very high and losses with respect to hydrocarbons is low.	The capture ratio and heat ratio are very high. For power plants operated using coal, there is high capture energy penalty of approximately 20 – 30%. Challenges relating to corrosion is also a major obstacle. Solvent challenge relating to stability, reduction in capture ratio, heat ratio and stripping temperatures to facilitate the usage of waste heat.	[56 – 63]
Physical absorption	Has high capture efficiency. Very suitable for power plants fired by coal. The capture efficiency is very high but the heat ratio is low for regeneration. This is also considered a matured technology for processing of natural gas and post combustion.	The selectivity is low with high hydrocarbon losses.	[63, 64]
Membrane penetration	Suitable for natural gas processing on large scale. Does not require any chemicals.	Confining of natural gas is needed. There is high hydrocarbon losses	[65 – 67]
Pre combustion	Appropriate for power plants fired by coal. Cost effective, suitable for hydrogen production in commercial quantities. Has highly efficient, approximately 10 – 15% low capture energy penalty.	It is very complex, requires new materials for high carbon dioxide capture at high temperature, huge capital expenses, still undergoing developmental processes. The experience for large scale hydrogen fired power plant is still inadequate	[68], [69]
Cryogenic distillation	This is also a matured technology for natural gas with high carbon dioxide composition, high selectivity, little hydrocarbon losses. There is no need for compression as the carbon dioxide is obtained in liquid state hence transportation is easy and simple. Suitable for high carbon dioxide composition.	Avoiding the carbon dioxide freeze out is very necessary and also refrigeration energy penalties.	[63]

Table 5: Other technology for carbon capture but with insufficient large-scale experience

Technological advancement	Characteristics	Merits	Ref
Hybrids	High carbon dioxide elimination via cryogenic distillation.	The cost is very low, and the capture energy penalty is low as well	[70]
Enhancement of chemical or physical absorption	Flowsheets are complex and requires mixed solvents.	The equivalent work needed is 12% less compared to a stripper. There is high heat ratio reduction because of the usage of the mixed solvents instead of MEA in liquified state. The thermochemical stability is very high.	[71]
	The solvents have high efficiency	Reduced heat ratio	[72]
	Hybrid solvents	The challenge in relation to high parasitic energy consumption regarding water is reduced.	[73]
	Requires solvents that are anhydrous.	Reduced heat ratio, reduced evaporation losses.	[74] [75]
	Ionic liquid	Reduced heat ratio, loading of the carbon dioxide results in phase change.	
	Solvents that undergoes phase change	Requires using recycled heat	[76]
	carbon dioxide solventing out requires adding other solvent that are inert	Low heat ratio	[77]
	solvents that are organic		[61]

			[78]
Membrane penetration	New membrane materials	High flux but the exhaust gases have low pressure but high carbon dioxide.	[79]
	Integrated membrane material as well as process development for gas separation	Sustainable membrane permeability	[80, 81]
	Multi stage schemes		
	The sweep agent used is steam.	Highly efficient	[82]
	Solvent supported membrane	Efficient permeate elimination, avoiding carbon dioxide buildup,.  volatility of solvent negligible (ionic liquids and deep eutectic solvents) to enhance selectivity.	[83]  [84]
			[85]
Gas liquid membrane	Characterization and performance of various membrane materials	Highly efficient,	[86]
Adsorption	Novel sorbent materials	High surface area.	[74]
Oxy combustion	Makes post combustion capture simplified and also very efficient.	Highly efficient	[87]
Chemical looping burning	Uses metal oxide	Lower capturing energy cost	[88]
Mineralization	Converting solid material	Commercialized	[89]



Table 6: Comparison of the various carbon capture technology

Technical Issue	Post Combustion Capture	Pre-Combustion Capture	Oxyfuel Combustion Capture
Maturity of Technology	Matured type of technology utilized in many well-known applications at commercialized level	Dominant in process industry. Carbon capture and storage plants on full scale under progress.	There are presently no full scale oxyfuel carbon combustion and storage plant operating.
Merits	Very suitable for reconstruction of plants already in existence and this helps in consistent usage of common power plant generating technology like pulverized coal. There is also extensive research to enhance the efficiency of energy obtained from post combustion carbon capture equipment	The CO <sub>2</sub> separation process is less energy intensive because of low gas volume, high pressure and high carbon dioxide concentration. Acid gas removal process presently are used in several technologies commercially. The water consumption for this technology is also low compared to post combustion capture.	Pollutant is reduced. There is also no need for chemical operations on site. The technology is robust implying that it is compatible with other type of fuels. It is also easy and simple to reconstruct.
Demerit	Separation constraint due to low CO <sub>2</sub> partial pressure in flue gas.	High energy loss because of sorbent regeneration .	Net power output reduced .
Capital	Very expensive technology in terms of cost of operating the system.	IGCC cost is more than that of coal plant.	Technology for separating air very expensive

Table 7: The European Union policies on carbon capture technology


Classification of policies	Policy	Explanation in terms of carbon capture
Policies relating to industries	<ol style="list-style-type: none"> <li>1. Interventions relating to climate change</li> <li>2. Geological Storage of carbon dioxide</li> </ol>	<p>The European Commission explains that the integration of CCS in energy system will aid the European Union meet 15% of its emissions targets. This can only be achieved provided CCS gets the necessary support.. The commission has several pilot projects on CCS with the main objective of extending research work in this novel technology. Again, the commission is giving out financial support under the EU policy Framework) to support in easy commercialization of CCS technology.</p> <p>The European Union has also passed several policies and regulations relating to the safety of storage sites.</p>
Policies related to research activities	<ol style="list-style-type: none"> <li>1. Energy technology strategy</li> <li>2. Seventh Framework programme</li> <li>3. Research fellowships</li> </ol>	<p>The European Union has directives towards generating sustainable, safe and cheap energy. The Union also supports fast commercialization of low carbon technology by giving financial support to research activities geared toward CCS. Developing efficient capture technology (ENCAP) is another major priority of the European Union.</p> <p>Leadership Forum (CSLF), Cooperation Action within CCS (China – EU (COACH), Regulates activities for activities leading to carbon capture and storage (STRACO<sub>2</sub>), European CO<sub>2</sub> geography network, zero emission for EU fossil power generations before 2020 (ZEP) .</p> <p>UK: Near Zero Emission coal (NZEC)</p>

Competition policies	<ol style="list-style-type: none"> <li>1. Proposal for the geological storage of CO<sub>2</sub></li> <li>2. EU Energy market reform</li> </ol>	<p>This intends to prevent monopolization of CCS by some entities in the European Union. The directive states that members belonging to the EU must have free access to the CO<sub>2</sub> transport network and storage sites.</p> <p>Most future applications for CCS will be directly linked to the power sector and further advancement of the power sector will contribute to the fast commercialization of CCS.</p>
Policies relating to export	<ol style="list-style-type: none"> <li>1. Zero emission platform</li> <li>2. Aid EU industry to access foreign markets</li> </ol>	<p>The European Union projects that most of the carbon emission will originate from India and China futuristically hence there is the need for a strong collaboration between the EU and these countries. International relations will help in reducing climate change and also support the advancement of CCS technology.</p> <p>The EU serve as a backbone for its industry in gaining access to foreign markets. Some of the collaborative projects is achieved via international relations. Eg. Alstom, Bp, Doosan Babcock and shell are participants of the EU – China NZEC project</p>
European Union policy impact analysis and CCS	<ol style="list-style-type: none"> <li>1. Review of sustainable development strategy</li> <li>2. European Union impact analysis system</li> </ol>	<p>The European Union suggests that introducing policies related to renewables and CCS will require creating public awareness as well as the decision-making being fast.</p> <p>CCS technology according to impact analysis has uncertainties in terms of the impact on energy portfolio, interaction with renewable policies as well as technology needs outside the European Union.</p>

	3. Environmental assessment directive	The approach adopted in the evaluation of strategic environmental impacts of CCS remain uncertain.
	4. Environmental impact analysis	Environmental impact analysis is aimed at specific project evaluation and it has been applied to evaluate CCS demonstration projects.

ACCEPTED MANUSCRIPT

Graphical abstract

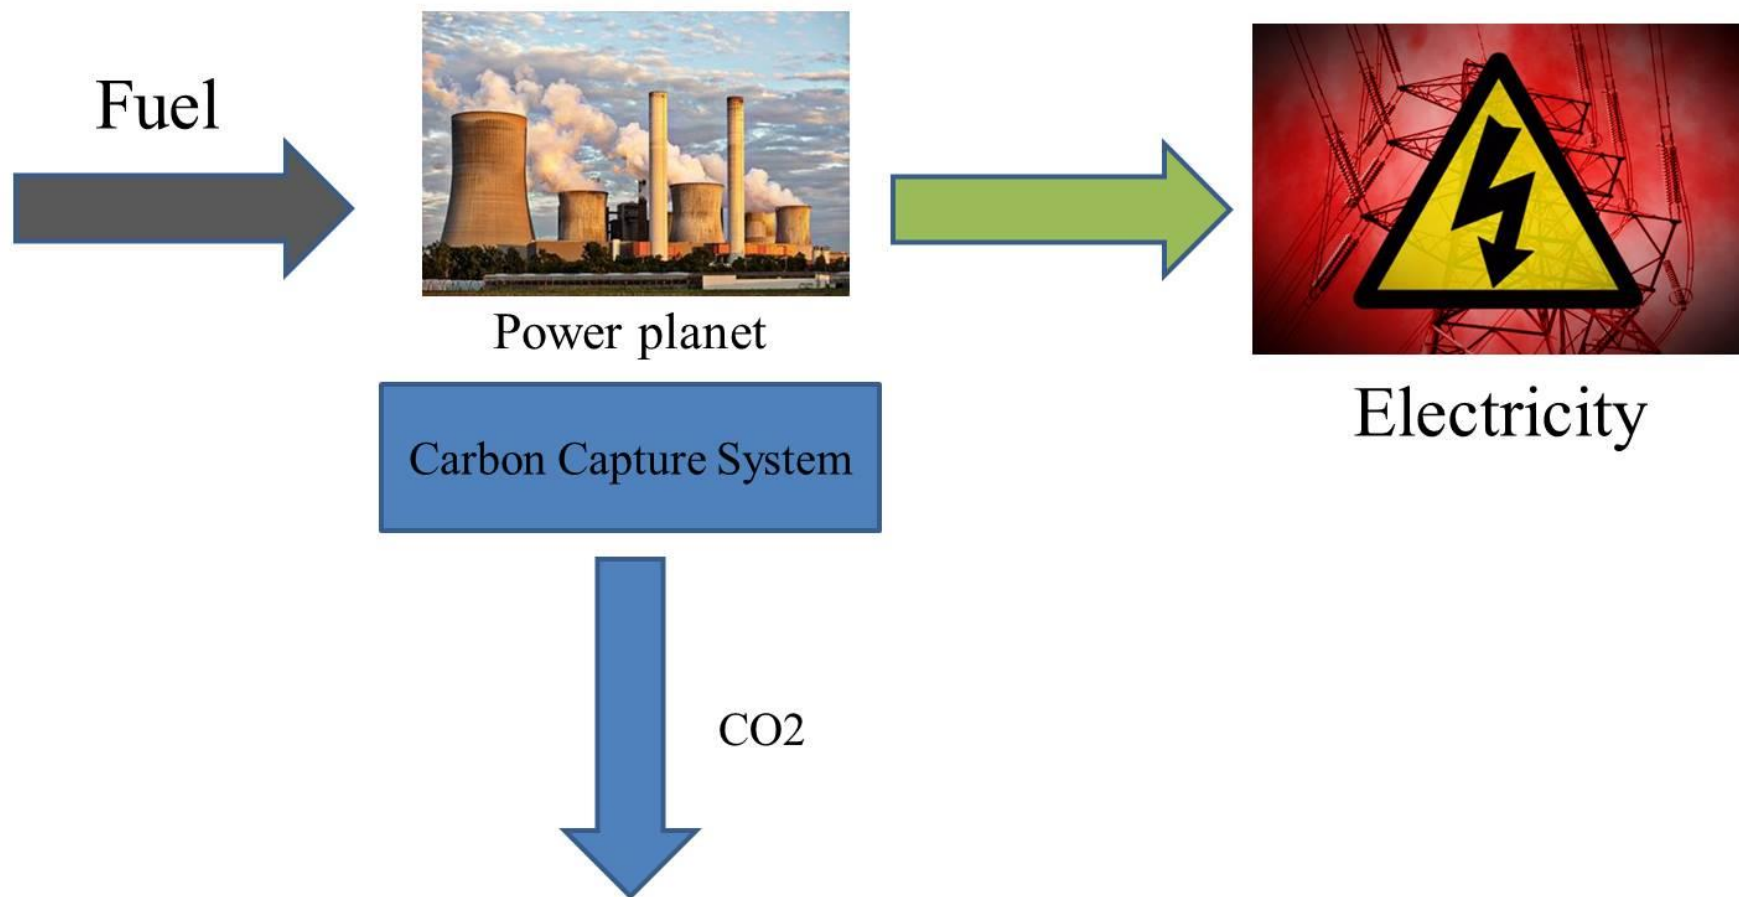

### Highlights

1. The main carbon capture technologies are reviewed
2. Comparison between the types of carbon capture technology is presented
3. Challenges of using these technologies in the capture of carbon dioxide is discussed
4. Future prospects of some of these technologies is presented.

ACCEPTED MANUSCRIPT