

Vector harmonic mode-locking by acoustic resonance

SERGEY V. SERGEYEV,^{1,*} STANISLAV KOLPAKOV,¹ AND YURY LOIKA¹

¹Aston Institute of Photonic Technologies, Aston University, Birmingham, B4 7ET, UK

*Corresponding author: s.sergeyev@aston.ac.uk

Received XX Month XXXX; revised XX Month, XXXX; accepted XX Month XXXX; posted XX Month XXXX
(Doc. ID XXXXX); published XX Month XXXX

Abstract: For Er-doped fiber laser, for the first time, we demonstrate both experimentally and theoretically a novel mechanism of harmonic mode-locking based on the electrostriction effect leading to excitation of the torsional acoustic modes in the transverse section of the laser. The excited torsional acoustic modes modulate the fiber birefringence that results in synchronization of oscillations at the harmonic modes and the linewidth narrowing with the increased signal-to-noise ratio of 30 dB. By adjusting the in-cavity birefringence based on tuning the polarization controller, we enable the selection of the harmonic mode to be stabilized.

© 2020 Optical Society of America under the terms of the [OSA Open Access Publishing Agreement](#)

1. INTRODUCTION

Ultrafast lasers with a high repetition rate constitute a versatile technology towards producing ultra-stable femtosecond pulse trains (optical frequency combs having fractional uncertainties of 10^{-18} and lower [1-9]) with characteristics required in metrology, high-resolution spectroscopy, microwave photonics, remote sensing, astronomy, and telecommunications [6-9]. Typically, the repetition rate of such lasers is limited by hundreds of MHz that is imposed by the difficulty of shortening the laser cavity [1-9].

The selective excitation of the harmonics of the fundamental frequency - harmonic mode-locking (HML) - is a practical pathway to increase the repetition rate hundred times through the use of resonance with the acoustic phonons, four-wave mixing, pattern-forming modulation instability or/and through the insertion of a linear component featuring a periodic spectral transfer function [4, 5, 10-16].

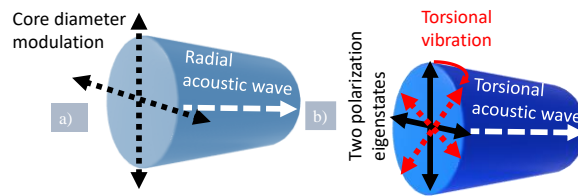


Fig.1 Acoustic modes in optical fiber core: a) radial mode R_{0m} ; b) torsional-radial mode TR_{2m} .

The most attractive technique of a stable HML is based on the resonance of a harmonic of the fundamental repetition rate with the frequency of a transverse acoustic wave and leads to tunable mode-locking with repetition rates up to a few GHz while narrowing the RF line width down to 100 Hz [4, 5, 10, 11]. The HML originates from the multi-pulsing caused by the laser's gain bandwidth constraint. The gain bandwidth limits the growth of the pulse

spectral bandwidth with increased pump power. As a result, many pulses emerge, and the energy is shared between pulses and pulses' bandwidths satisfy the gain bandwidth constrain [5, 17]. The pulses propagating in the cavity excite the radial R_{0m} and torsional-radial TR_{2m} acoustic modes through perturbations of the fiber core refractive index and the fiber birefringence (Fig.1 (a), (b), [18-20]). By adjustment of the in-cavity linear and circular birefringence with the help of in-cavity polarization controller, it was demonstrated an opportunity to control the interaction between the neighbored pulses and acoustic modes from attractive to repulsive forces and so the dynamics - from the vector soliton rain to HML driven by TR_{2m} acoustic modes [11, 21].

Recently, for the ring fiber resonator without a saturable absorber, it a mode-locking was demonstrated based on the mechanism of vector resonance multimode instability (VRMI) [22]. Increased birefringence strength causes spatial modulation of the cavity parameters (with a period related to the birefringence beat length) and leads through the Faraday instability to a parametric resonance at the fundamental frequency that acting as the active mode-locking [22]. For the case of harmonic mode-locking, the TR_{2m} modes perturb mainly the fiber birefringence only, and so acoustically induced oscillations of the fiber birefringence are relatively weak [18, 19]. Therefore, there is a challenging task of revealing the interplay between VRMI and TR_{2m} acoustic modes-based perturbation towards the stabilization of HML.

In this paper, for the first time, we demonstrate theoretically and experimentally a new mechanism of HML that doesn't require the presence of a saturable absorber or Kerr-effect-based nonlinear polarization rotation. Based on the vector model of MLFL developed by Sergeyev [22, 23] and results on fundamental frequency mode-locking based on VRMI [22], we reveal a novel vector HML mechanism that is based on an interplay of VRMI with birefringence distortions caused by TR_{2m} . For the actual setup, the resonance occurred for the 24th, 38th, and 45th harmonics and resulted in linewidth narrowing below the values previously reported by Grudinin and Gray [10].

2. EXPERIMENTAL SETUP AND METHODS

The experimental setup is shown in Fig.2 (a). The cavity includes 15.8 m of standard telecommunication fiber (SMF28) and 75 cm of Liekki Er80-8/125 gain fiber (EDF) with the anomalous dispersion of $-20 \text{ fs}^2/\text{mm}$ and modal field diameter of $9.5 \text{ }\mu\text{m}$. The length of the whole cavity, taking into account the physical length of all components, was 17 meters. The pump diode (FOL14xx series with isolator) has the maximum optical power up to 250 mW, which was measured after the polarization controller POC1, optical isolator (not shown in Fig.2 (a)) and wavelength division multiplexer (WDM). A polarization controller POC1 and an optical isolator for 1560 nm were placed between the diode output and the WDM. The isolator was used to improve the laser diode stability. The output coupler 80:20 was used to direct the light out of the cavity. In the first experiment, the laser was assembled with an optical isolator with 25 dB attenuation. In this configuration, it was impossible to obtain periodic pulsations, and the output exhibited noisy behavior. After installation of an isolator with 51 dB attenuation, the laser was successfully mode-locked. The backpropagated radiation was controlled through the auxiliary port (not shown in Fig.2 (a)), and the level of the backscattered power was measured to be -49 dB in comparison with the power measured from the port labeled with "OUTPUT C". The threshold was found to be close to 36 mW of the pump power using linear extrapolation of the signal versus pump power curve to zero value of the signal power, as illustrated in Fig.2 (b). To characterize the polarization laser dynamics at the time scales of $1 \text{ }\mu\text{s} - 20 \text{ ms}$ (averaging over 10 roundtrips), we used a polarimeter (IPM5300, Thorlabs) to record the normalized Stokes parameters s_1 , s_2 , s_3 , the total output power S_0 , and degree of polarization (DOP). Those are related to the output powers of two linearly cross-polarized SOPs, I_x and I_y , and to the phase difference between them $\Delta\phi$ [11, 22-24]

$$S_0 = I_x + I_y, S_1 = I_x - I_y, S_2 = 2\sqrt{I_x I_y} \cos \phi, S_3 = 2\sqrt{I_x I_y} \sin \phi,$$

$$s_i = S_i / \sqrt{S_1^2 + S_2^2 + S_3^2}, (i = 1, 2, 3), DOP = \sqrt{S_1^2 + S_2^2 + S_3^2} / S_0, \quad (1)$$

As seen there, the absence of a polarizer and the presence of only one polarization controller inside the laser cavity, together with low pump powers (less than 200 mW), rule out the possibility of mode-locking through nonlinear polarization rotation.

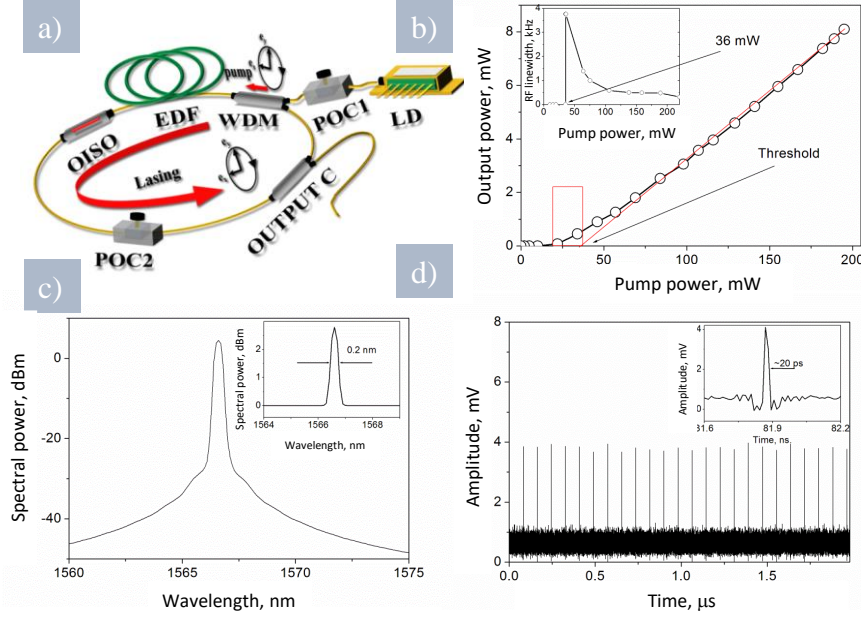


Fig.2. Operation of the laser at the fundamental frequency a) Erbium-doped fiber laser. EDF: erbium fiber; LD: 1480 nm laser diode for the pump; POC1 and POC2: polarization controllers, OISO: optical isolator; WDM: wavelength division multiplexer (WDM), OUTPUT C: 80:20 output coupler. b) Average laser output power versus pump power; INSET: the RF linewidth versus pump power (370 Hz at 220 mW pump power). The rectangle indicates the interval where unstable mode-locking patterns have been observed. c) The optical spectrum; inset: the same spectra plotted using a linear scale: 0.2 nm is a bandwidth at 3 dB level. d) The train of pulses at the fundamental frequency, INSET: time-resolved pulse.

3. Vector model of Er-doped fiber laser

To understand the mechanism of vector mode-locking caused by stable self-mode locking and tunability of harmonic mode-locking and linewidth narrowing, we developed a new vector model of EDFLs as described in the section Appendix. The model accounts for the linear and circular birefringence and fast- and slow axis modulation caused by TR_{2m} acoustic modes. Without accounting for the gain dynamics, the SOP evolution in terms of the Stokes vector S and number of roundtrips caused by the interplay of the factors mentioned above can be described as follows:

$$dS/dt = R \cdot W \times S, \quad (2)$$

Here time is normalized to the roundtrip time, $W = (\beta_L, 0, \beta_c)^T$ is the birefringence vector, $\beta_L(c) = 2\pi/L_{bL(bC)}$ is the linear (circular) birefringence strength, $L_{bL(bC)}$ is the beat length for linear (circular) birefringence. The matrix R is the 3x3 matrix that defines the rotation of the birefringence vector around axis OS_3 caused by TR_{2m} excitation [20, 24]:

$$R = \begin{bmatrix} \cos(\zeta(t)) & -\sin(\zeta(t)) & 0 \\ \sin(\zeta(t)) & \cos(\zeta(t)) & 0 \\ 0 & 0 & 1 \end{bmatrix}, \quad (3)$$

where $\zeta(t) = A_0 \cos(2\pi\Omega t)$. Here $\zeta(t)$ is the angle of the birefringence vector rotation, A_0 is the amplitude of rotation, and Ω is the frequency of oscillations at the TR_{2m} acoustic mode. In Eqs. 2 and 3, the contribution of TR_{2m} was accounting for only in the birefringence modulation context. The modulation of the refractive index was neglected.

Previously it was illustrated [22] that the linear birefringence tuning results in the vector resonance multimode instability in a fiber laser. By adjusting the in-cavity and the pump wave polarization controllers, we were able to increase the birefringence strength, leading to the generation of two satellite lines around the q -harmonic frequency. When the beat length equals the cavity length, the frequencies of the satellites for q -harmonic were in resonance with the $q+1$ - and $q-1$ -harmonic that results in longitudinal modes synchronization.

The complexity of the vector model (see the Appendix) exceeds the complexity of any known scalar or vector models of fiber lasers considered elsewhere. As follows from [22], the linear stability analysis even for the simplified system without accounting for the circular birefringence and TR_{2m} acoustic modes results in the number of eigenfrequencies with the ratio (with respect to the fundamental frequency f) of $1:10^{-1}:10^{-2}:10^{-3}:10^{-4}$. It leads to necessity accounting for many time scales, and so vast computation resources will be required. Given the complexity of the problem, we introduced a few approximations to reveal the effect of the TR_{2m} on the modulation of the output power at frequency Ω , resulting in HML if the frequency Ω coincides with the frequency of the harmonic q . First, though the TR_{2m} modulates all modes that result in HML stabilization shown in Fig. 3, in the theoretical analysis, we accounted for the only interplay of the linear and circular birefringence with the TR_{2m} acoustic mode-based modulation for harmonic $q = 0$ in terms of the ability of excitation of the output power oscillations at a frequency of TR_{2m} mode. Next, we combined Eqs. 2 and 3 with our vector model of Er-doped fiber laser [22, 23].

4. RESULTS

A. Experimental results

The output power versus pump power, the emission spectrum, and the pulse train are shown in Fig.2 (b) to 2 (d). When the pump power exceeded 48 mW, stable mode-locked pulses could be observed on the oscilloscope. As seen in Fig.2 (d), the observed pulse train has the fundamental repetition rate of 12.21 MHz. The mean value of the RF linewidth at the fundamental frequency at the 3-dB level was only 370 Hz (see INSET of Fig.2 (b) and Table 1 in Appendix). This value is much less than typical values of 10 KHz found for mode-locked lasers with a saturable absorber [1-9]. The transient time for stabilization of this regime varies from a fraction of a second to few minutes. The pulse trace with 20 ps pulse width is shown in INSET of Figure 2d (Details of pulse width measurements are found in Appendix). The signal-to-noise ratio (SNR) of four (6 dB), as shown in Fig.2 (d), indicates the partial mode-locking. The most stable patterns observed in our experiments were at the fundamental frequency of 12.21 MHz and its high-order harmonics at frequencies of 293.16 MHz, 464.17 MHz, and 549.7 MHz (Table I in Appendix). Previously it was shown that excitation of oscillations at such frequencies could be caused by the resonance structure of the spectrum of acoustic phonons excited by this comb through the electrostriction effect [4, 5, 10, 11].

The dynamics of the harmonic mode-locking at 293.16 MHz is illustrated in Figs. 3 (a)-(d). A segment of the RF spectra in the mode-locked regime is shown in Fig. 3 (a). The lines "A", "B" and "C" correspond to the 23rd, 24th, and 25th harmonics of the fundamental frequency. To understand the origin of the satellite lines, we changed birefringence in the laser cavity by turning the knob of the polarization controller POC2 and kept the pump power fixed at 160 mW. While the angle of the knob was tuned between 18 positions, the satellites

of the adjacent lines “A” and “C” were moving closer to the line labeled “B” as shown in Fig. 3 (a). To get insight into the linewidth compression, we show temporal traces and RF spectra for the last four steps (labeled with (15), (16), (17), and (18)) in Figs. 3 (b) and 3 (c), respectively. For position 15 in Figs. 3 (b) and 3 (c), the distance between the satellites is slightly less than 3 MHz and corresponds to the situation when the satellites completely vanish. The RF line corresponding to the fundamental comb frequency has changed in SNR from 6 dB to 30 dB. In position 16, the distance between satellites was diminished. In this position, the noise demonstrated a periodic pattern, and the RF spectrum became broader and had “three humps”. After the knob of POC2 has been turned again (position 17), the oscilloscope traces (Fig. 3 (b), (position 17)) showed regularly modulated oscillations at 293.16 MHz and the bias period close to 20 ns (50 MHz). The RF spectrum now exhibited multiple peaks.

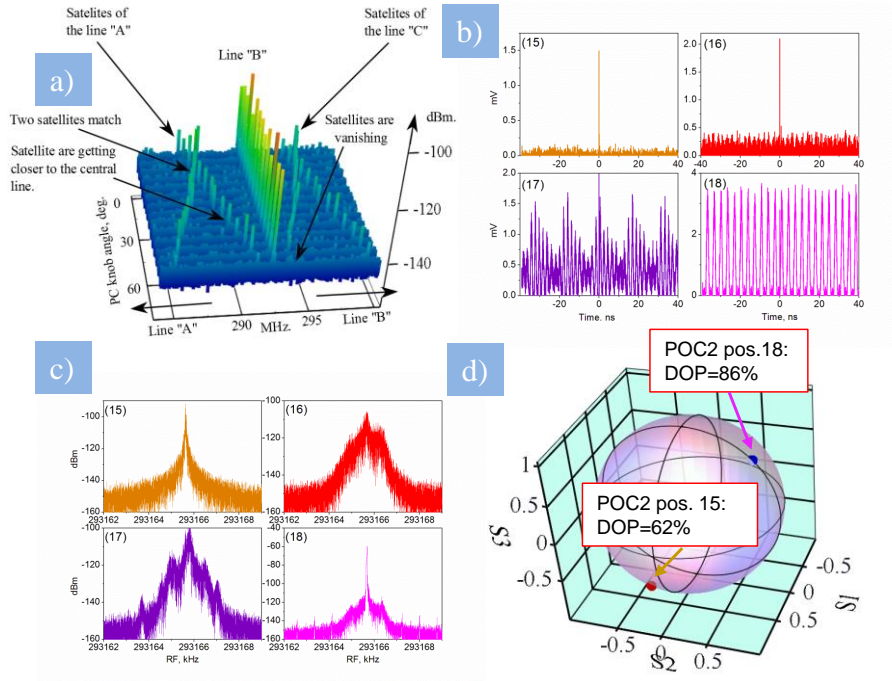


Fig.3. Acousto-optical polarization-dependent locking of a high harmonics a) RF comb showing 24th harmonic along with satellites of 23rd, 24th, and 25th harmonics tuning with the help of in-cavity polarization controller POC2. b) Emergence of the 293.16 MHz pulse train for the positions 15, 16, 17, and 18 of the POC2. c) Evolution of the RF spectrum of the 293.16 MHz line for the positions 15, 16, 17, and 18 of the POC2. d) The output SOPs for the POC2 positions 15 and 18 (measurements resolution is 1 μ s).

Finally, after the last rotation of the knob (position 18), the modulation disappeared, and the regular oscillations pattern at the frequency of 293.16 MHz became visible. The RF spectrum showed a unique narrow resonance line with 60 dB SNR. The noise level was at -120 dB (limit of the RF analyzer) as shown in Fig.3 (d). SOP is locked for POC2 positions 15 and 18 that corresponds to the self-oscillation at the fundamental frequency (position 15) and harmonic mode-locking (position 18). The adjustment of polarization controller POC2 from position 15 to position 18 changes the linear and circular birefringence in the cavity due to induced fiber squeezing and twist [24]. As shown in Fig.3 (d), increasing DOP from 62 %

(position 15) to 86% (position 18) indicates SOP variations suppression and so more stable operation for 18th position as compared to the 15th position. In addition to these results, we have observed o locking at different acoustic frequencies, as shown in Table 1 of the Appendix B. The tuning between different harmonics was performed by adjusting POC2.

B. Theoretical results

The results of the theoretical analysis are shown in Fig. 4 (a-i). As follows from Figs. 4 (a), (b); (d), (e), the output power I and I_x , I_y are oscillating at frequency $\omega = \sqrt{\beta_L^2 + \beta_C^2}$ [24], whereas oscillations at the frequency Ω have almost been suppressed. Only for the case when the frequency $\Omega = 14\pi$ is a multiple of frequency $\omega = 2\pi$, the oscillations at the frequency ω disappear, and the output power is modulated at frequency Ω . This is like the experimental data shown in Fig. 3, where HML is stabilized only when $\omega = 2\pi$, i.e. when the satellites' frequencies are matching the frequency spacing between harmonics. The HML mechanism looks like the vector mode-locking at the fundamental frequency [22]. By adjusting the in-cavity polarization controller POC2, we were able to increase the circular birefringence strength that leads to the generation of two satellite lines around the $q=0$ harmonic frequency. When the birefringence-based modulation frequency ω approaches the fundamental frequency, the modulation of the harmonic at the frequency ω disappears, and TR_{2m} is activation results in modulation of $q=0$ cavity mode with the frequency of TR_{2m} . The amplitude of the output power (Fig. 4 g) along with the Stokes parameters shown was small, and so SOP was locked (Fig. 4 (i)).

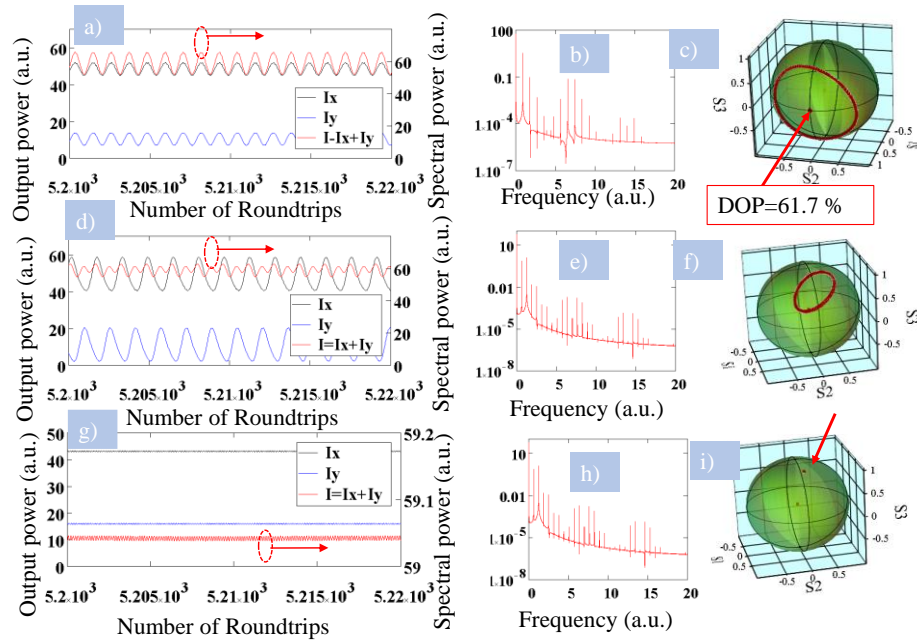


Fig. 4. Results of the numerical modeling. a), d), g) The output power vs time for two linearly cross-polarized SOPs I_x (blue line) and I_y (black) and total power $I=I_x+I_y$ (red); b), e), h) Spectrum of the oscillations; c), f), i) trajectories on the Poincare sphere.

Parameters: time is normalized to the roundtrip time, frequency Ω – to the fundamental frequency; birefringence strengths β_L , β_C - to the fiber length; a)-i) $\Omega = 7$, $A_0 = 0.1$; ellipticity of the pump wave $\delta=0.5$; a)-c) $\beta_L = 2\pi/\sqrt{5}$, $\beta_C = 0$; d)-f) $\beta_L = 2\pi/\sqrt{5}$, $\beta_C = 2\pi\sqrt{2}/\sqrt{5}$; g)-i) $\beta_L = 2\pi/\sqrt{5}$, $\beta_C = 2\pi\sqrt{4}/\sqrt{5}$. The other parameters are found in Appendix C.

The trajectories on the Poincare sphere shown in Fig. 4 (c) and (f) are different from the experimentally observed (Fig. 3 (d)). However, the DOP=62 % in Fig. 3 (d) indicates that the SOP evolves at the time scale faster than the polarimeter resolution of $1 \mu\text{s}$ and, after averaging over 10 roundtrips, can shrink to the dot at the Poincare sphere [11]. By using a low-pass filter with the Hanning window (Transmission spectrum $T(f) = (1 + \cos(\pi f/f_c))/2$, $f \leq f_c = 1\text{MHz}$) we have processed time domain waveforms shown in Fig.4 (c) [25]. As a result, the SOP in the form of circle was transformed to the dot with DOP=61.7 % that is close to the experimental results. The suppression of the oscillations at the frequency ω indicates that the linewidth is narrowing due to oscillations only at the frequency Ω (Fig. 4 h)).

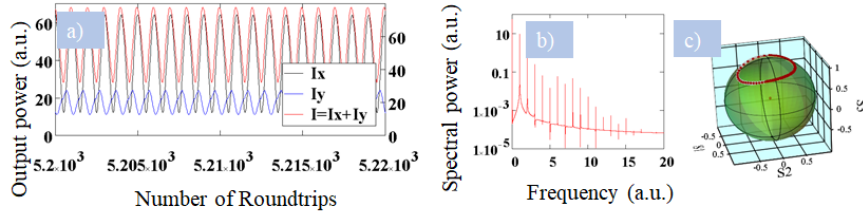


Fig. 5 Results of the numerical modeling. The difference as compared to the Fig. 4 (g-i) is in the increased ellipticity of the pump wave $\delta=0.7$.

While ellipticity of the pump wave increasing from $\delta=0.5$ to $\delta=0.7$, the oscillations at the frequency ω were persisting as shown in Fig. 5 (a-c). The increased ellipticity resulted in the reduced coupling of the orthogonal SOPs and so prevented synchronization and so suppression of the oscillations at frequency ω .

We highlight that the analysis of HML based on the excitation of TR_{2m} provides just a qualitative approach to the linewidth suppression. The presence of oscillations of the output power at the frequency of TR_{2m} mode and cancelation of the oscillations at the frequency related to the linear and circular birefringence results in narrowing the RF line and increased SNR of 30 dB. Quantification of the linewidth suppression at the fundamental and 293.16 MHz, 464.17 MHz, 549.7 MHz harmonic frequencies would require an improved jitter model that accounts for the state of polarization, dispersion, and contribution of phonons excited by this comb through the electrostriction effect and it lies beyond the scope of this paper.

5. CONCLUSION

In conclusion, we demonstrated a new vector HML mode-locking mechanism experimentally confirmed for an Er-doped fiber ring cavity. By adjusting the in-cavity polarization controller and the pump power, we could switch the stable fundamental mode operation at 12.21 MHz to the harmonic mode-locked operation at 293.16 MHz, 464.17 MHz and 549.7 MHz along with linewidth narrowing from thousands of Hz to a few Hz followed by 30 dB increasing of the SNR. To explain stable HML mode operation and the linewidth narrowing with increased birefringence strength, we developed a new vector model that accounts for the interplay of linear and circular birefringence with birefringence modulation caused by excitation of the radial-torsional acoustic mode TR_{2m} . In the future extension of the vector model given in the section Appendix, we will develop a vector model of jitter for mode-locked fiber lasers to quantify the linewidth narrowing and repetition rate tunability.

6. APPENDIX

A. Pulse measurement technique

The pulse duration was too large to be measured with an auto-correlator. To estimate the pulse parameters, we used an ultrafast photodetector XPDV232OR with a bandwidth of 50 GHz. This detector in turn was connected to DSO-X93204A oscilloscope with a bandwidth of 32GHz. The pulse width of 20 ps was obtained using the oscilloscope trace and the interpolation software supplied by Agilent. This algorithm gave us the effective resolution of 781 fs/point. The pulse energy was estimated to be 1.4 nJ. The time-bandwidth product (TBWP) K was calculated to be 0.5 using the formula $K = (cT\Delta\lambda)/\lambda^2$, where T is the pulse duration, $\Delta\lambda$ is the width of the optical spectrum and λ is the central optical wavelength. Since the TBWP for Gaussian pulse $K=0.441$, we have assumed that pulses have are slightly chirped.

B. Harmonic frequencies

Table 1 Frequencies observed in the experiments

Frequency, MHz.	RF peak width, Hz.	Temporal jitter, ppm ³	Long term drift
12,21	[210, 370, 530] ^{1,2}	40	Yes
97.7	Unstable	Unstable	-
207.6	Unstable	Unstable	-
293.16	[9, 38, 155] ¹	1.4	Yes
464.17	[22, 38, 150] ¹	0.9	Yes
549.7	[1, 13, 97] ¹	0.5	Yes
842.5	Unstable	Unstable	-
903.5	Unstable	Unstable	-

¹Asymmetric interval of confidence 0. 95 [min, mean, max]

²At pump power of 220mW

³ Parts per million with respect to the main value of frequency. The jitter has been quantified using ARIMA (0, 1, 0) (random walk with drift) model with the interval of confidence 0.95.

C. Vector model of Er-doped fiber laser

Evolution of the laser SOPs and population of the first excited level in Er³⁺ doped active medium was modeled using the following equations derived from the vector theory developed by Sergeyev and co-workers [25, 26]:

$$\begin{aligned}
\frac{dS_0}{dt} &= \left(\frac{2\alpha_1 f_1}{1 + \Delta^2} - 2\alpha_2 \right) S_0 + \frac{2\alpha_1 f_2}{1 + \Delta^2} S_1 + \frac{2\alpha_1 f_3}{1 + \Delta^2} S_2, \\
\frac{dS_1}{dt} &= \gamma S_2 S_3 + \frac{2\alpha_1 f_2}{1 + \Delta^2} S_0 + \left(\frac{2\alpha_1 f_1}{1 + \Delta^2} - 2\alpha_2 \right) S_1 - \beta_c S_2 - \left(\frac{2\alpha_1 f_3 \Delta}{1 + \Delta^2} - \beta_L \sin(\zeta(t)) \right) S_3 + \sigma_1, \\
\frac{dS_2}{dt} &= -\gamma S_1 S_3 + \frac{2\alpha_1 f_3}{1 + \Delta^2} S_0 + \beta_c S_1 + \left(\frac{2\alpha_1 f_1}{1 + \Delta^2} - 2\alpha_2 \right) S_2 + \left(\frac{2\alpha_1 f_2 \Delta}{1 + \Delta^2} - \beta_L \cos(\zeta(t)) \right) S_3 \\
&\quad + \sigma_2, \\
\frac{dS_3}{dt} &= \left(\frac{2\alpha_1 \Delta f_3}{1 + \Delta^2} - \beta_L \sin(\zeta(t)) \right) S_1 - \left(\frac{2\alpha_1 \Delta f_2}{1 + \Delta^2} - \beta_L \cos(\zeta(t)) \right) S_2 + \left(\frac{2\alpha_1 f_1}{1 + \Delta^2} - 2\alpha_2 \right) S_3 \\
&\quad + \sigma_3, \\
\frac{df_1}{dt} &= \varepsilon \left[\frac{(\chi_s - 1)I_p}{2} - 1 - \left(1 + \frac{I_p \chi_p}{2} + d_1 S_0 \right) f_1 - \left(d_1 S_1 + \frac{I_p \chi_p (1 - \delta^2)}{2 (1 + \delta^2)} \right) f_2 - d_1 S_2 f_3 \right],
\end{aligned}$$

$$\begin{aligned}\frac{df_2}{dt} &= \varepsilon \left[\frac{(1-\delta^2)I_p(\chi_s-1)}{(1+\delta^2)4} - \left(\frac{I_p\chi_p}{2} + 1 + d_1S_0 \right) f_2 - \left(\frac{(1-\delta^2)I_p\chi_p}{(1+\delta^2)2} + d_1S_1 \right) \frac{f_1}{2} \right], \\ \frac{df_3}{dt} &= -\varepsilon \left[\frac{d_1S_2f_1}{2} + \left(\frac{I_p\chi_p}{2} + 1 + d_1S_0 \right) f_3 \right].\end{aligned}\quad (C1)$$

Here time and length are normalized to the round trip and cavity length, respectively; S_i ($i=0,1,2,3$) are the Stokes parameters (S_0 is the output power, pump and lasing powers are normalized to the corresponding saturation powers); $\beta_{L(C)} = 2\pi/L_{bL(bC)}$ is the linear (circular) birefringence, $L_{bL(bC)}$ is the linear (circular) birefringence beat length; $\zeta(t) = A_0 \cos(2\pi\Omega t)$. Here $\zeta(t)$ is the angle of the birefringence vector rotation, A_0 is the amplitude of rotation, and Ω is the frequency of oscillations at the TR_{2m} acoustic mode; α_l is the total absorption of erbium ions at the lasing wavelength, α_2 is the total insertion losses in the cavity; δ is the ellipticity of the pump wave, $\varepsilon = \tau_R/\tau_{Er}$ is the ratio of the round trip time τ_R to the lifetime of erbium ions at the first excited level τ_{Er} ; $\chi_{p,s} = (\sigma_a^{(s,p)} + \sigma_e^{(s,p)})/\sigma_a^{(s,p)}$, $\sigma_a^{(s,p)}$ and $\sigma_e^{(s,p)}$ are absorption and emission cross-sections at the lasing (s) and pump (p) wavelengths; Δ is the detuning of the lasing wavelength with respect to the maximum of the gain spectrum (normalized to the gain spectral width); $d_1 = \chi_s/\pi(1 + \Delta^2)$; σ_i are Stokes parameters of the injected δ -correlated stochastic signal:

$$\langle \sigma_i(t) \rangle_t = 0, \quad \langle \sigma_i(t) \sigma_j(t - \tau) \rangle_t = \Sigma^2 \delta_{i,j} \delta(\tau), \quad \delta_{i,j} = \begin{cases} 1, & i = j, \\ 0 & i \neq j. \end{cases} \quad \delta(\tau) = \begin{cases} \infty, & \tau = 0, \\ 0 & \tau \neq 0. \end{cases} \quad (C2)$$

Here $\delta_{i,j}$ is the Kronecker symbol, $\delta(\tau)$ is the Dirac function, $\Sigma^2 = 1/\tau_c$, τ_c is the correlation time.

Eqs. (C1) have been derived under approximation that the dipole moments of the absorption and emission transitions for erbium-doped silica are located in the plane that is orthogonal to the direction of the light propagation. This results in the angular distribution of the excited ions $n(\theta)$, which can be expanded into a Fourier series as follows:

$$\begin{aligned}n(\theta) &= \frac{n_0}{2} + \sum_{k=1}^{\infty} n_{1k} \cos(k\theta) + \sum_{k=1}^{\infty} n_{2k} \sin(k\theta), \\ f_1 &= \left(\chi \frac{n_0}{2} - 1 \right) + \chi \frac{n_{12}}{2}, \quad f_2 = \left(\chi \frac{n_0}{2} - 1 \right) - \chi \frac{n_{12}}{2}, \quad f_3 = \chi \frac{n_{22}}{2}.\end{aligned}\quad (C3)$$

Eqs. (C3) means an approximation application where the dipole moments of the absorption and emission transitions for Er-doped silica are located in the plane orthogonal to the direction of the light propagation [25, 27]. In contrast to a more general approximation with 3D orientation distribution of the dipole orientations [28, 29], this approximation results in the finite dimension system presented by Eqs. (C1) where only n_0 , n_{12} , and n_{21} components contribute to the laser dynamics.

Unlike the other vector models, the vector model in a more simple form with approximations considered in our previous publications [22], [23], [25], [26] is justified by experimental data on the mode-locked laser polarization dynamics at the time scales from one round trip to thousands of round trips. The main obstacle to use our model with including fast (pulse width) and slow (round trips) time scales have been mentioned in our previous publication related to VRMI [22].

To obtain results shown in Figs. 4, we used the following parameters: a)-i) $\Omega = 7$, $A_0 = 0.1$; a)-c) $\beta_L = 2\pi/\sqrt{5}$, $\beta_C = 0$; d)-f) $\beta_L = 2\pi/\sqrt{5}$, $\beta_C = \pi\sqrt{2}/\sqrt{5}$; g)-i) $\beta_L = 2\pi/\sqrt{5}$, $\beta_C = \pi\sqrt{4}/\sqrt{5}$. The other parameters: a)-i) $\alpha_l = 21.5$, $\alpha_2 = 2.53$, $I_p = 30$, $\delta = 0.5$ (elliptically polarized pump SOP), $\Delta = 0.1$, $\varepsilon = 10^{-4}$, $\chi_p = 1/0.75$, $\chi_s = 2.3$, $\Sigma = 10^{-3}$.

Funding. Horizon 2020 ETN MEFISTA (861152) and EID MOCCA (814147).

Disclosures. The authors declare no conflicts of interest.

References

1. M. Dudley, F. Dias, M. Erkintalo, G. Genty, "Instabilities, breathers and rogue waves in optics," *Nat. Photonics* **8**, 755-764 (2014).
2. P. Grelu, and N. Akhmediev, "Dissipative solitons for mode-locked lasers," *Nature Photonics* **6**, 84-92 (2012).
3. W. Fu, L. G. Wright, P. Sidorenko, S. Backus, and F. W. Wise, "Several new directions for ultrafast fiber lasers," *Opt. Express* **26**, 9432-9463 (2018).
4. X. Liu, and M. Pang, "Revealing the buildup dynamics of harmonic mode-locking states in ultrafast lasers," *Laser Photonics Revs.* **13**, 1800333 (2019).
5. M. Pang, X. Jiang, W. He, G. K. L. Wong, G. Onishchukov, N. Y. Joly, G. Ahmed, C. R. Menyuk, and P. St. J. Russell, "Stable subpicosecond soliton fiber laser passively mode-locked by gigahertz acoustic resonance in photonic crystal fiber core," *Optica* **2**, 339-342 (2015).
6. H. Leopardi, J. Davila-Rodriguez, F. Quinlan, J. Olson, J. A. Sherman, S. A. Diddams, and T. M. Fortier, "Single-branch Er: fiber frequency comb for precision optical metrology with 10^{-18} fractional instability," *Optica* **4**, 879-885 (2017).
7. G. Pu, L. Yi, L. Zhang, and W. Hu, "Intelligent programmable mode-locked fiber laser with a human-like algorithm," *Optica* **6**, 362-369 (2019).
8. T. Fortier, and E. Baumann, "20 years of developments in optical frequency comb technology and applications," *Commun. Phys.* **2**, 1-16 (2019).
9. N. Picqué, and T. W. Hänsch, "Frequency comb spectroscopy," *Nat. Photonics* **13**, 146-157 (2019).
10. A. B. Grudinin, and S. Gray, "Passive harmonic mode locking in soliton fiber lasers," *J. Opt. Soc. Am. B* **14**, 144-154 (1997).
11. H. J. Khashi, S. V. Sergeyev, M. Al-Araimi, A. Rozhin, D. Korobko, and A. Fotiadi, "High-frequency vector harmonic mode locking driven by acoustic resonances," *Opt. Lett.* **44**, 5112-5115 (2019).
12. M. Quiroga-Teixeiro, C. B. Clausen, M. P. Sørensen, P. L. Christiansen, and P. A. Andrekson, "Passive mode locking by dissipative four-wave mixing," *J. Opt. Soc. Am. B* **15**, 1315-1321 (1998).
13. T. Sylvestre, S. Coen, P. Emplit, and M. Haelterman, "Self-induced modulational instability laser revisited: normal dispersion and dark-pulse train generation," *Opt. Lett.* **27**, 482-484 (2002).
14. M. Peccianti, A. Pasquazi, Y. Park, B. E. Little, S. T. Chu, D. J. Moss, and R. Morandotti, "Demonstration of a stable ultrafast laser based on a nonlinear microcavity. *Nature communications*," *Nat. Commun.* **3**, 1-6 (2012).
15. D. Mao, X. Liu, Z. Sun, H. Lu, D. Han, G. Wang, and F. Wang, "Flexible high-repetition-rate ultrafast fiber laser," *Sci. Rep.* **14**, 1-5 (2013).
16. I. A. Lobach, S. I. Kablukov, E. V. Podivilov, A. A. Fotiadi, and S. A. Babin, "Fourier synthesis with single-mode pulses from a multimode laser," *Opt. Lett.* **40**, 3671-3674 (2015).
17. F. Li, P. K. A. Wai, and J. N. Kutz, "Geometrical description of the onset of multipulsing in mode-locked laser cavities," *J. Opt. Soc. Am. B* **27**, 2068-2077 (2010).
18. R. M. Shelby, M. D. Levenson, and P. W. Bayer, "Guided acoustic-wave Brillouin scattering," *Phys. Rev. B* **31**, 5244-5252 (1985).
19. A. N. Pilipetskii, A. V. Luchnikov, and A. M. Prokhorov, "Soliton pulse long-range interaction in optical fibers: The role of light polarization and fiber geometry," *Sov. Lightwave Commun.* **3**, 29-39 (1993).
20. I. Kim, and K. J. Lee, "Axial strain dependence of torsional acousto-optic gratings induced in a form-birefringence optical fiber," *J. Korean Phys. Soc.* **67**, 465-471 (2015).
21. H. J. Khashi, S. V. Sergeyev, M. Al Araimi, N. Tarasov, and A. Rozhin, "Vector soliton rain," *Laser Phys. Lett.* **16**, 035103 (2019).
22. S. V. Sergeyev, H. Khashi, N. Tarasov, Y. Loiko, and S. A. Kolpakov, "Vector-Resonance-Multimode Instability," *Phys. Rev. Lett.* **118**, 033904 (2017).
23. S. V. Sergeyev, "Vector self-pulsing in erbium-doped fiber lasers. *Optics Lett.*" **41**, 4700-4703 (2016).
24. E. Collett, *Polarized light in fiber optics* (SPIE Press, 2003).
25. S. V. Sergeyev, C. Mou, E. G. Turitsyna, A. Rozhin, S. K. Turitsyn, and K. Blow, "Spiral attractor created by vector solitons," *Light: Science & Appl.* **3**, e131 (2014).
26. S. V. Sergeyev, "Fast and slowly evolving vector solitons in mode-locked fibre lasers," *Phil. Trans. R. Soc. A* **372**, 20140006 (2014).
27. H. Zeghlache, A. Boulnois, "Polarization instability in lasers. I. Model and steady states of neodymium-doped fiber lasers," *Phys. Rev. A* **52**, 4229 (1995).
28. S. V. Sergeyev, "Spontaneous light-polarization symmetry breaking for an anisotropic ring-cavity dye laser," *Phys. Rev. A* **59**, 3909 (1999).
29. V. A. Gaisnok, G. G. Krylov, and S. V. Sergeyev, "Dynamic operations of a dye laser with a saturable absorber: pumping anisotropy and orientational relaxation," *Physica D* **72**, 161-165 (1994).